






EN

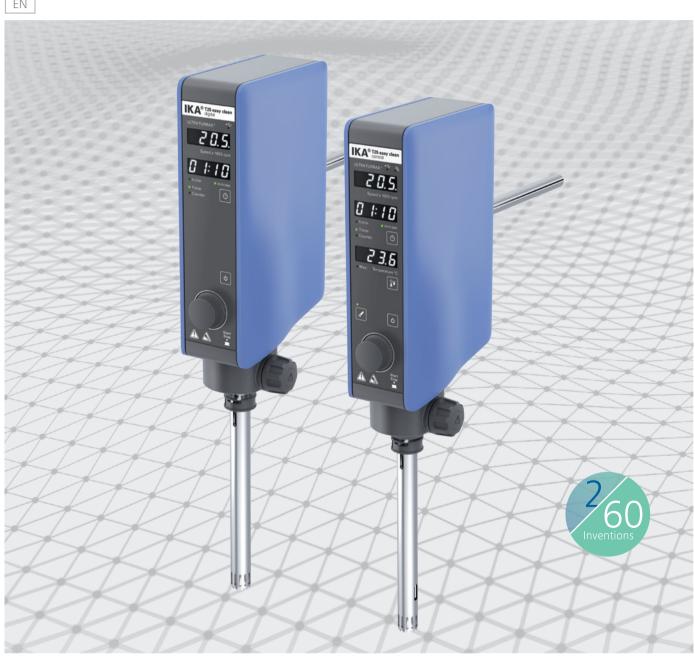

HIGH-PERFORMANCE DISPERSING | T 25 easy clean digital and control



More quiet, clean and even remote controlled: The T 25 easy clean high-performance disperser in the digital and control versions will change your dispersing experience. These instruments hit the spot with electronic speed control from 3 000 – 25 000 rpm, a working volume of  $1-2\,000$  ml (water), a long service life both for the drive and tools, as well as a wide range of dispersing tools to choose from. Medical samples are perfectly homogenised, cosmetics emulsified and paints suspended. Dispersion under vacuum or pressure is also possible in conjunction with an IKA


# T 25 easy clean digital Ident. No. 0025002560



# T 25 easy clean control Ident. No. 0025002500



## Technical data T 25 easy clean digital and control

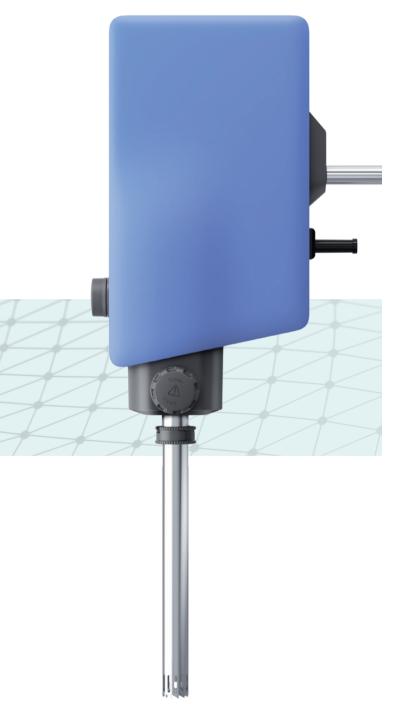

### TECHNICAL DATA

Motor rating input	500 W
Motor rating output	400 W
Volume range min. (H <sub>2</sub> O)	0.001
Volume range max. (H <sub>2</sub> O)	2
Viscosity max.	5 000 mPas
Speed	Min. 3 000 rpm Max. 25 000 rpm
Speed deviation	2 %
Speed display	LED
Speed control	Stepless
Noise without tool	70 dB(A)
Extension arm diameter	13 mm
Extension arm length	160 mm
Process type	Batch
Timer	Yes
Interfaces	USB
Permissible ON time	100 %

### GENERAL DATA

Weight	3.0 kg
Dimensions (W $\times$ H $\times$ D)	89 × 270 × 161 mm
Permissible ambient temperature	5 – 40 °C
Permissible relative humidity	80 %
Protection class according to DIN EN 60529	IP 30
Voltage	220 – 240 V
Frequency	50/60 Hz

If required, the following IKA devices are available for your lab to enhance your T 25 easy clean disperser experience:



LR 1000 control System Laboratory Reactor Ident. No. 0025001991



ICC control pro 12 c Immersion circulator Ident. No. 0010000417

### Accessories T 25 easy clean digital and control







Find more accessories on www.ika.com

### S 25 EC-C-18G-ST Dispersing tool

Cleaning status for easy clean: By turning and lowering the clamp, the shaft and rotor can be dropped until the whole rotor comes out of the stator. Working volume: 10 – 1 500 ml. Bearing with ceramic plain bearing. Suitable for solvents, sterilizable. Ident. No. 0025002580

### S 25 KV - 25 F Dispersing tool

Working volume: 100 - 2 000 ml. For operation under vacuum. Bearing with ball bearing and mechanical sealing. Stator diameter: 25 mm. Immersion depth: 40 - 225 mm. Short-term working temperature: up to 220 °C. Suitable for vacuum and solvents, sterilizable. Ident. No. 0002404000

### TS 25-3 Cleaning tool

Cleaning tool in combination with the disperser T 25 digital, T 25 easy clean digital/control. Scope of delivery: one tube holder, three tubes and three caps. Ident. No. 0020003013

### 000 «Диаэм»

Москва ул. Магаданская, д. 7, к. 3 ■ тел./факс: (495) 745-0508 ■ sales@dia-m.ru

С.-Петербург +7 (812) 372-6040 spb@dia-m.ru

Казань +7(843) 210-2080 kazan@dia-m.ru

Новосибирск +7(383) 328-0048 nsk@dia-m.ru

Ростов-на-Дону +7 (863) 303-5500 rnd@dia-m.ru

Воронеж

+7 (473) 232-4412 vrn@dia-m.ru

Екатеринбург +7 (912) 658-7606 ekb@dia-m.ru

Йошкар-Ола +7 (927) 880-3676 nba@dia-m.ru

Кемерово +7 (923) 158-6753 kemerovo@dia-m.ruu

Красноярск +7(923) 303-0152 krsk@dia-m.ru

Армения +7 (094) 01-0173 armenia@dia-m.ru



www.dia-m.ru

201909\_Dispergierer\_T25 easy clean\_EN\_94000584