

ΔΙΑ•M  
современная лаборатория

www.dia-m.ru  
заказ on-line

eppendorf

General Lab Products EU



# Natural Winners

You give your all to scientific research every day  
Eppendorf liquid handling instruments help you grow beyond your limits



# »Global Research, Eppendorf Engineering.«

Perfection down to the smallest detail – this principle is adhered to in the design and functionality of Eppendorf pipettes, dispensers and laboratory consumables. The Eppendorf competence and expertise in liquid handling has resulted in many innovations, award-winning ergonomic designs, cutting edge production and the selection of optimal materials for our products.

## The Eppendorf Liquid Handling Instrument Portfolio

As the first company to launch a microliter pipette, we at Eppendorf have over 60 years' experience in precise manual and automatic pipetting/dispensing and transferring of the smallest quantities of liquids. Today, liquid handling systems from Eppendorf are used wherever accuracy, precision, and absolute reliability are important. In our product development, we strive to simplify cumbersome lab work and make it as safe and efficient as possible so you can concentrate on and accelerate your research.

### Master Your Challenging Liquids!

Are you working with viscous, volatile, dense or foaming liquids? Become an expert and master even challenging liquids precisely with the right tool.



> See page 10 for more information

### Eppendorf PhysioCare Concept®

The use of our liquid handling products has been proven to reduce physical and psychological strain to a minimum by following the rules of the PhysioCare Concept.



> See page 34 for more information

### Eppendorf Services

A comprehensive range of service programs including maintenance, seminars, application, and technical support as well as certification services build the basis for premium support.

**epServices**  
for premium performance

> See page 35 for more information

# A History of Quality and Innovation

The timeline is presented as a series of three ascending planes. The bottom plane (tan) shows instruments from 1958 to 1976. The middle plane (green) shows instruments from 1978 to 1999. The top plane (blue) shows instruments from 2006 to 2021. Each instrument is accompanied by its year and model name.

**1958** Patent of the first piston stroke pipette

**1961** Marburg Pipette

**1964** Marburg 3110

**1970** Eppendorf 3130

**1976** Comforpette 4700

**1978** Multipipette 4780

**1979** Varipipette 4710

**1991** Unipipette 3190

**1994** Eppendorf Reference 4910

**1995** Titerman 4908

**1996** Eppendorf Research 3110

**1998** Multipipette plus

**1999** Eppendorf Research pro

**2006** Multipipette Stream/Xstream

**2009** Eppendorf Research plus

**2011** Eppendorf Xplorer plus

**2013** Multipipette M4

**2013** Eppendorf Reference 2

**2015** Multipipette E3/E3x

**2020** Eppendorf Move It®

**2021** VisioNize pipette manager

In 1958 Heinrich Schnitger filed for a patent describing a »device for the fast and exact pipetting of small liquid volumes.«

Eppendorf recognized the potential of this invention and developed the first industrial manufactured piston stroke pipette on this basis. The »Marburg Pipette«, launched in 1961, featured the same basic elements that we find in today's labs: A spring-loaded piston and a removable plastic tip. This alternative to mouth pipetting changed the face of pipetting forever.

Innovation continues at [www.eppendorf.com](http://www.eppendorf.com)



# Which instrument should you use?


Selecting the right pipette or dispenser can be the key to success in your work. It can boost your efficiency and throughput and ensure reliable results for different use cases.

Should you be new to liquid handling, please refer to the information below for a quick introduction to the basics.

## What are air-cushion and positive displacement instruments?


### Air-cushion principle

Air-cushion pipettes are most commonly used in labs around the world and ideal for liquids with physical properties similar to water. In this instrument type, the piston is separated from the liquid sample by a small air cushion. Temperature or humidity changes, as well as the physical properties of different liquids can affect the performance of air-cushion instruments. To reduce these risks however, Eppendorf air-cushion pipettes work with extra small air cushions and may be temporarily adjusted to different liquids.

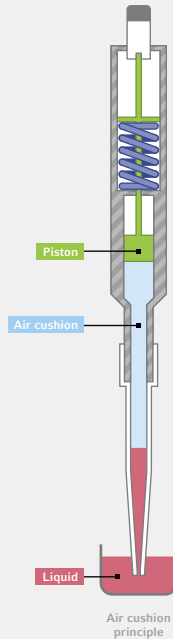

### Positive displacement principle

In positive displacement systems, the piston is part of the tip and in direct contact with the liquid. There is no air cushion that may be affected by liquid sample properties. These tools are therefore ideal for liquids with varying viscosity, volatility, surface tension or density as well as hot or cold liquids. The disposable tips with integrated pistons also prevent contamination and help to keep user and instrument safe when working with hazardous liquids.

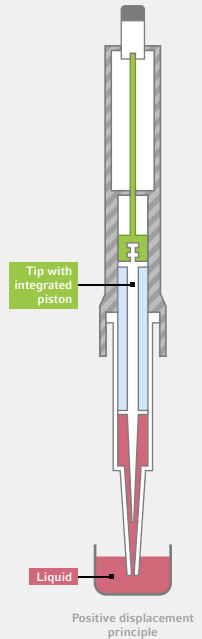

## When should you use an electronic instrument?

The most important general benefits of using an electronic instrument are: better ergonomics by requiring almost no operating forces, a higher precision and reproducibility and an additional efficiency gain due to various operating modes (such as e.g. pipetting and dispensing with only one tool). Furthermore, electronic instruments are the basis for digital lab solutions supporting scientists with choosing settings for different liquid types, collaborating across the lab or documenting steps.

## When should you think about an automated solution?

Automated liquid handling systems such as the *epMotion*<sup>®</sup> family are ideal to take over routine and repetitive pipetting tasks that are commonly found in many molecular biological applications. They are ideally suited whenever complex processes need to be standardized, help to reduce the risk of manual pipetting errors, increase reproducibility and free up your valuable time for other tasks.



# Selection Guide

## Air-cushion principle



Model	Eppendorf Research® plus	Eppendorf Reference® 2	Eppendorf Xplorer®/Xplorer® plus
Application	Pipetting of aqueous liquids	Pipetting of aqueous liquids	Pipetting of aqueous liquids
Product type	Pipette	Pipette	Pipette
Compatible VisioNize® pipette manager	–	–	Yes
Operation	Mechanical, separate control button and ejector	Mechanical, combined control button and ejector	Electronic, separate control button and ejector
Pipetting type	Air-cushion	Air-cushion	Air-cushion
Adjustable cone spacing	No	No	No
Positioning	Ultra light weight and pipetting force for ultimate ergonomics	Reliability in robustness and results	Intuitive and fast pipetting
Volume range	0.1 µL–10 mL	0.1 µL–10 mL	0.5 µL–10 mL
Available options	1-channel 8-channel 12-channel 16-channel 24-channel	1-channel 8-channel 12-channel	1-channel 8-channel 12-channel 16-channel 24-channel
Autoclavable	Yes	Yes	Yes (lower part)
Consumables	epT.I.P.S.® and ep Dualfilter T.I.P.S.® as well as other pipette tip brands	epT.I.P.S.® and ep Dualfilter T.I.P.S.® as well as other pipette tip brands	epT.I.P.S.® and ep Dualfilter T.I.P.S.® as well as other pipette tip brands
Purity grades of consumables	> Eppendorf Quality™ > PCR clean & sterile > Eppendorf Biopur® > Forensic DNA Grade	> Eppendorf Quality™ > PCR clean & sterile > Eppendorf Biopur® > Forensic DNA Grade	> Eppendorf Quality™ > PCR clean & sterile > Eppendorf Biopur® > Forensic DNA Grade
Page	12	14	16

\*1 Combitips advanced only

### When should I use air-cushion pipettes?

Air-cushion pipettes are optimal for liquids with physical properties similar to water.



<b>Eppendorf Research® plus / Xplorer® plus Move It®</b>
Pipetting of aqueous liquids
Pipette
Yes
Mechanical or electronic, separate control button and ejector
Air-cushion
Yes
Double your performance when transferring multiple samples between changing formats
1–1,200 µL
4-channel (9-33 mm) 6-channel (9-20 mm) 8-channel (9-14 mm) 8-channel (4.5-14 mm) 12-channel (4.5-9 mm)
Yes (Xplorer plus only lower part)
epT.I.P.S.® and ep Dualfilter T.I.P.S.® as well as other pipette tip brands
> Eppendorf Quality™ > PCR clean & sterile > Eppendorf Biopur® > Forensic DNA Grade
18

<b>Eppendorf Easyset® 3</b>
Pipetting of aqueous liquids with serological and volumetric pipettes
Pipette controller
–
Electronic
Air-cushion
No
Overall ergonomic concept with new speed control for stress-free pipetting
0.1–100 mL
1-channel
Yes (pipette adapter and aspirating cone)
Eppendorf Serological Pipets and other volumetric and serological pipettes
> Sterile > Free of detectable RNase & DNase > Free of detectable pyrogens > Free of detectable DNA > Forensic DNA Grade
26

<b>Eppendorf Pipet Helper®</b>
Pipetting of aqueous liquids with serological and volumetric pipettes
Pipette controller
–
Mechanical
Air-cushion
No
A perfect instrument for inexperienced users because of its robust and intuitive design
0.1–100 mL
1-channel
Yes
Eppendorf Serological Pipets and other volumetric and serological pipettes
> Sterile > Free of detectable RNase & DNase > Free of detectable pyrogens > Free of detectable DNA > Forensic DNA Grade
26

## Positive displacement pipettes

<b>Multipette® M4</b>
Dispensing of up to 100 steps per Combitip filling of aqueous, viscous and volatile liquids
Dispenser
–
Mechanical
Positive displacement
No
Time savings for serial dispensing and high accuracy for challenging liquids
1 µL–10 mL
1-channel
No
Combitips advanced® ViscoTip®
> Eppendorf Quality™ > PCR clean*1 > Eppendorf Biopur®*1 > Forensic DNA Grade*1
22

When should I use positive displacement pipettes?  
Positive displacement instruments are used for the dispensing of viscous, volatile and other challenging liquids. These include liquids with varying viscosities.

## Principle



Multipipette® E3/E3x	Varipette® 4720	Varispenser® 2/2x	Eppendorf Top Buret™	epMotion® 96 and epMotion® 96xl
Dispensing of up to 100 steps per Combitip filling of aqueous, viscous and volatile liquids	Contamination-free pipetting of aqueous, viscous and volatile liquids	Single stroke dispensing of lyes, acids, bases, aqueous liquids or solvents	Titration of aqueous liquids	Pipetting of aqueous liquids with 96 channels at once
Dispenser	Pipette	Bottletop dispenser	Bottletop burette	Semi-automated 96 channel pipette
Yes	–	–	–	–
Electronic	Mechanical	Mechanical	Electronic	Electronic
Positive displacement	Positive displacement and air-cushion	Positive displacement	Positive displacement	Air-cushion
No	No	No	No	No
Reduced strain for long dispensing series and highest volume flexibility	Pipetting with reduced outside fault effects	Safe and easy dispensing of liquid from supply and reagent bottles	Continuous and pulse-free titration	Intuitive and fast pipetting in 96 and 384 format
1 µL–50 mL	1–10 mL	0.2–100 mL	0.1–999.9 mL	epMotion 96: 0.5–300 µL, epMotion 96xl: 5–1,000 µL
1-channel	1-channel	1-channel	1-channel	2-position lifting table
No	No	Yes	No	No
Combitips advanced® ViscoTip®	Eppendorf Varitips	–	–	epT.I.P.S.® Motion reload system
> Eppendorf Quality™ > PCR clean* <sup>1</sup> > Eppendorf Biopur®* <sup>1</sup> > Forensic DNA Grade* <sup>1</sup>	> Eppendorf Quality™	–	–	> Eppendorf Quality™ > PCR clean > PCR clean & sterile
23	27	27	27	30

## Instrument types

are ideal for liquids with physical properties other than those of water. Viscosity, volatility, surface tension or density as well as hot, cold or hazardous liquids.

## Automated liquid handling

Automated liquid handling  
Easy programming of liquid  
temperature incubations, plate







## Handling



epMotion® 5070	epMotion® 5073	epMotion® 5075
Serial pipetting of aqueous, viscous and volatile liquids in automated way for easy tasks on small foot print Automated Liquid Handling	Serial pipetting of aqueous, viscous and volatile liquids in automated way for routine tasks Automated Liquid Handling	Serial pipetting of aqueous, viscous and volatile liquids in automated way with highest flexibility and tool options Automated Liquid Handling
-	-	-
Automation	Automation	Automation
Air-cushion	Air-cushion	Air-cushion
No	No	No
Reproducible, contamination-free, contactless pipetting at high precision and accuracy	Same as 5070 but more flexibility with 6 deck positions and more features	Same as 5070 but full flexibility with 15 deck positions and even more features
0.2–1,000 µL, 1 & 8 channel	0.2–1,000 µL, 1 & 8 channel	0.2–1,000 µL, 1 & 8 channel
Automatic exchange of 2 dispensing tools, tablet or PC control	Same as 5070 plus gripper transport, 1 thermal module, ThermoMixer, magnetic separation HEPA filter & UV light	Same as 5073 plus 3 thermal modules, Automatic exchange of 4 dispensing tools, Vacuum separation
Yes (tools)	Yes (tools), UV light and HEPA filter (optional)	Yes (tools), UV light and HEPA filter (optional)
epT.I.P.S.® Motion tips as racks or reloads	epT.I.P.S.® Motion tips as racks or reloads	epT.I.P.S.® Motion tips as racks or reloads
> Eppendorf Quality™ > PCR clean > PCR clean & sterile	> Eppendorf Quality™ > PCR clean > PCR clean & sterile	> Eppendorf Quality™ > PCR clean > PCR clean & sterile
31	32	33


# Master Any Type of Liquid

Type of Liquid		Water	Viscous e.g. glycerol, oil	Dense e.g. sulfuric acid, caesium chloride	Volatile e.g. acetone, ethanol
					
Potential problems	Observations	<ul style="list-style-type: none"> <li>&gt; Air-cushion pipettes are optimized to the physical properties of water</li> </ul>	<ul style="list-style-type: none"> <li>&gt; High resistance to flow</li> <li>&gt; Liquid residues stay attached to inside tip wall</li> <li>&gt; Imprecise results</li> </ul>	<ul style="list-style-type: none"> <li>&gt; Influence on size of air-cushion</li> <li>&gt; Dispensed volume too low or too high</li> </ul>	<ul style="list-style-type: none"> <li>&gt; Air-cushion expands</li> <li>&gt; Liquid drips out of the tip</li> <li>&gt; Imprecise results</li> </ul>
Workaround	Air-cushion pipettes	<ul style="list-style-type: none"> <li>&gt; Optimally suitable for the use of water</li> <li>&gt; No adaptation necessary</li> </ul>	<ul style="list-style-type: none"> <li>&gt; Work slowly</li> <li>&gt; Reverse pipetting</li> <li>&gt; Adjust to liquid type*<sup>1</sup></li> </ul>	<ul style="list-style-type: none"> <li>&gt; Adjust pipette to liquid density</li> <li>&gt; Adjust to liquid type*<sup>1</sup></li> </ul>	<ul style="list-style-type: none"> <li>&gt; Prewet at least 5 times</li> <li>&gt; Reverse pipetting</li> <li>&gt; Adjust to liquid type*<sup>1</sup></li> </ul>
Recommendations	Positive displacement dispenser	<ul style="list-style-type: none"> <li>&gt; Serial pipetting for multiple samples and vessel formats</li> </ul>	<ul style="list-style-type: none"> <li>&gt; Higher precision regardless of physical properties of liquid</li> <li>&gt; Serial dispensing</li> <li>&gt; No adjustment to liquid type needed</li> </ul>	<ul style="list-style-type: none"> <li>&gt; Higher precision regardless of physical properties of liquid</li> <li>&gt; Serial dispensing</li> <li>&gt; No adjustment to liquid type needed</li> </ul>	<ul style="list-style-type: none"> <li>&gt; Higher precision regardless of physical properties of liquid</li> <li>&gt; Serial dispensing</li> <li>&gt; No adjustment to liquid type needed</li> </ul>
	Positive displacement pipettes	<ul style="list-style-type: none"> <li>&gt; Varitip S*<sup>3,4</sup> system allows accurate pipetting from large bottles and narrow vessels</li> </ul>	<ul style="list-style-type: none"> <li>&gt; Varitip P*<sup>2</sup> allows accurate pipetting, for example from beakers</li> </ul>	<ul style="list-style-type: none"> <li>&gt; Varitip P*<sup>2</sup> allows accurate pipetting, for example from beakers</li> </ul>	<ul style="list-style-type: none"> <li>&gt; Varitip P*<sup>2</sup> allows accurate pipetting, for example from beakers</li> <li>&gt; Varitip S system and valve for drip-free dispensing</li> </ul>
	Bottletop dispenser and burets	<ul style="list-style-type: none"> <li>&gt; Liquid dispensing directly from supply bottles</li> </ul>	<ul style="list-style-type: none"> <li>&gt; Liquid dispensing directly from supply bottles (with Varispenser® 2/2x up to a viscosity of 500 mm<sup>2/s</sup>)</li> </ul>	<ul style="list-style-type: none"> <li>&gt; Liquid dispensing directly from supply bottles up to a density of 2.2 g/cm<sup>3</sup></li> </ul>	<ul style="list-style-type: none"> <li>&gt; Liquid dispensing directly from supply bottles up to a vapor pressure of 500 mbar</li> </ul>

\*<sup>1</sup> This option is only available on automated systems and electronic pipettes\*<sup>2,3,4</sup> See Varipette® 4720 for corresponding Eppendorf Varitips®



**Eppendorf Solutions**

Mechanical systems	Electronic systems
--------------------	--------------------





<p><b>Advantages</b></p> <ul style="list-style-type: none"> <li>&gt; Easy to clean</li> <li>&gt; Economical</li> <li>&gt; Lightweight</li> </ul>	<p><b>Advantages</b></p> <ul style="list-style-type: none"> <li>&gt; High reproducibility</li> <li>&gt; Ergonomic working</li> <li>&gt; Multifunctionality</li> </ul>
--	---


<ul style="list-style-type: none"> <li>&gt; Eppendorf Research® plus</li> <li>&gt; Eppendorf Reference® 2</li> <li>&gt; Research plus Move It®</li> <li>&gt; Pipet Helper®</li> </ul> 	<ul style="list-style-type: none"> <li>&gt; Eppendorf Xplorer® (plus)</li> <li>&gt; VisioNize® pipette manager</li> <li>&gt; Xplorer plus Move It®</li> <li>&gt; Easypet® 3</li> <li>&gt; epMotion®</li> </ul> 
--	--

<ul style="list-style-type: none"> <li>&gt; Multipette® M4</li> </ul> 	<ul style="list-style-type: none"> <li>&gt; Multipette® E3/E3x</li> </ul> 
--	---

<ul style="list-style-type: none"> <li>&gt; Varipette® 4720</li> </ul> 	
---	--

<ul style="list-style-type: none"> <li>&gt; Varispenser® 2/2x for dispensing large volumes</li> </ul> 	<ul style="list-style-type: none"> <li>&gt; Eppendorf Top Buret™ for titration</li> </ul> 
--	---

<p><b>Infectious / radioactive</b> e.g. biohazard material</p>	<p><b>Detergent / detergent-containing</b> e.g. Tween 20, Triton™ X-100</p>	<p><b>Foaming</b> e.g. protein-containing liquids</p>
--	---	---

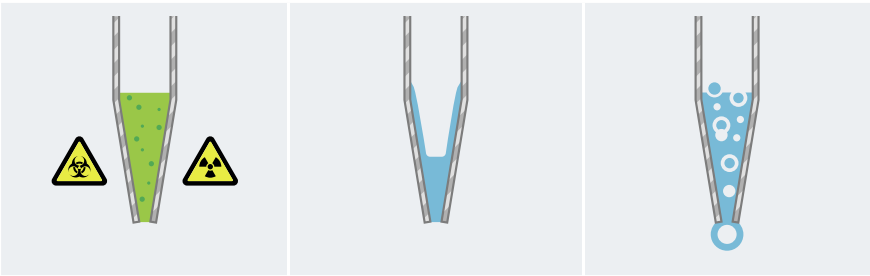

<ul style="list-style-type: none"> <li>&gt; Aerosols contaminate pipette</li> <li>&gt; Threat to human health and sample safety</li> </ul>	<ul style="list-style-type: none"> <li>&gt; Reduced surface tension</li> <li>&gt; Liquid residues stick to the inner wall of the tip</li> <li>&gt; Imprecise results</li> </ul>	<ul style="list-style-type: none"> <li>&gt; Foam is created</li> <li>&gt; Liquid residues remain in the tip</li> <li>&gt; Imprecise results</li> </ul>
--	---	--

<ul style="list-style-type: none"> <li>&gt; Use filter tips</li> <li>&gt; Automated systems protect user and sample</li> </ul>	<ul style="list-style-type: none"> <li>&gt; Use tips with low retention effect</li> <li>&gt; Adjust to liquid type*1</li> </ul>	<ul style="list-style-type: none"> <li>&gt; Reverse pipetting</li> </ul>
--	---	--

<ul style="list-style-type: none"> <li>&gt; Higher precision regardless of physical properties of liquid</li> <li>&gt; Serial dispensing</li> </ul>	<ul style="list-style-type: none"> <li>&gt; Higher precision regardless of physical properties of liquid</li> <li>&gt; Serial dispensing</li> </ul>	<ul style="list-style-type: none"> <li>&gt; Higher precision regardless of physical properties of liquid</li> <li>&gt; Serial dispensing</li> </ul>
---	---	---

<ul style="list-style-type: none"> <li>&gt; Varitip P*2 allows accurate pipetting, for example from beakers</li> </ul>	<ul style="list-style-type: none"> <li>&gt; Varitip P*2 allows accurate pipetting, for example from beakers</li> </ul>	<ul style="list-style-type: none"> <li>&gt; Varitip P*2 allows accurate pipetting, for example from beakers</li> </ul>
--	--	--

<ul style="list-style-type: none"> <li>&gt; Liquid dispensing directly from supply bottles</li> </ul>	<ul style="list-style-type: none"> <li>&gt; Liquid dispensing directly from supply bottles (with Varispenser® 2/2x up to a viscosity of 500 mm<sup>2/s</sup>)</li> </ul>	<ul style="list-style-type: none"> <li>&gt; Liquid dispensing directly from supply bottles</li> </ul>
---	--	---


# Eppendorf Research® plus

The Eppendorf Research plus combines about 60 years of innovation in liquid handling to provide you with one of the safest and most ergonomic pipettes available today. The Research plus is remarkably light, both in terms of weight and pipetting forces, setting new standards for ergonomic operation. It is comforting to know you are working with one of the most advanced pipettes in the world.

A spring loaded tip cone, a temporary adjustment option, an improved volume display – and all that in an ultra light, fully autoclavable pipette. The Research plus pipette will become an indispensable tool in your laboratory.

## Research plus benefits

- > Ultra light mechanical pipette designed according to the strict criteria of the Eppendorf PhysioCare Concept
- > Very low weight and operating forces for advanced ergonomics to limit strain on your hand and arm
- > User adjustment option to offset inaccuracies when pipetting warm, cold, volatile or high density liquids and return to factory adjustment without calibration
- > One of the most commonly used pipettes in the world
- > Available as single-, 8-, 12-, 16- and 24-channel as well as adjustable tip spacing multi-channel pipette (Move It®)

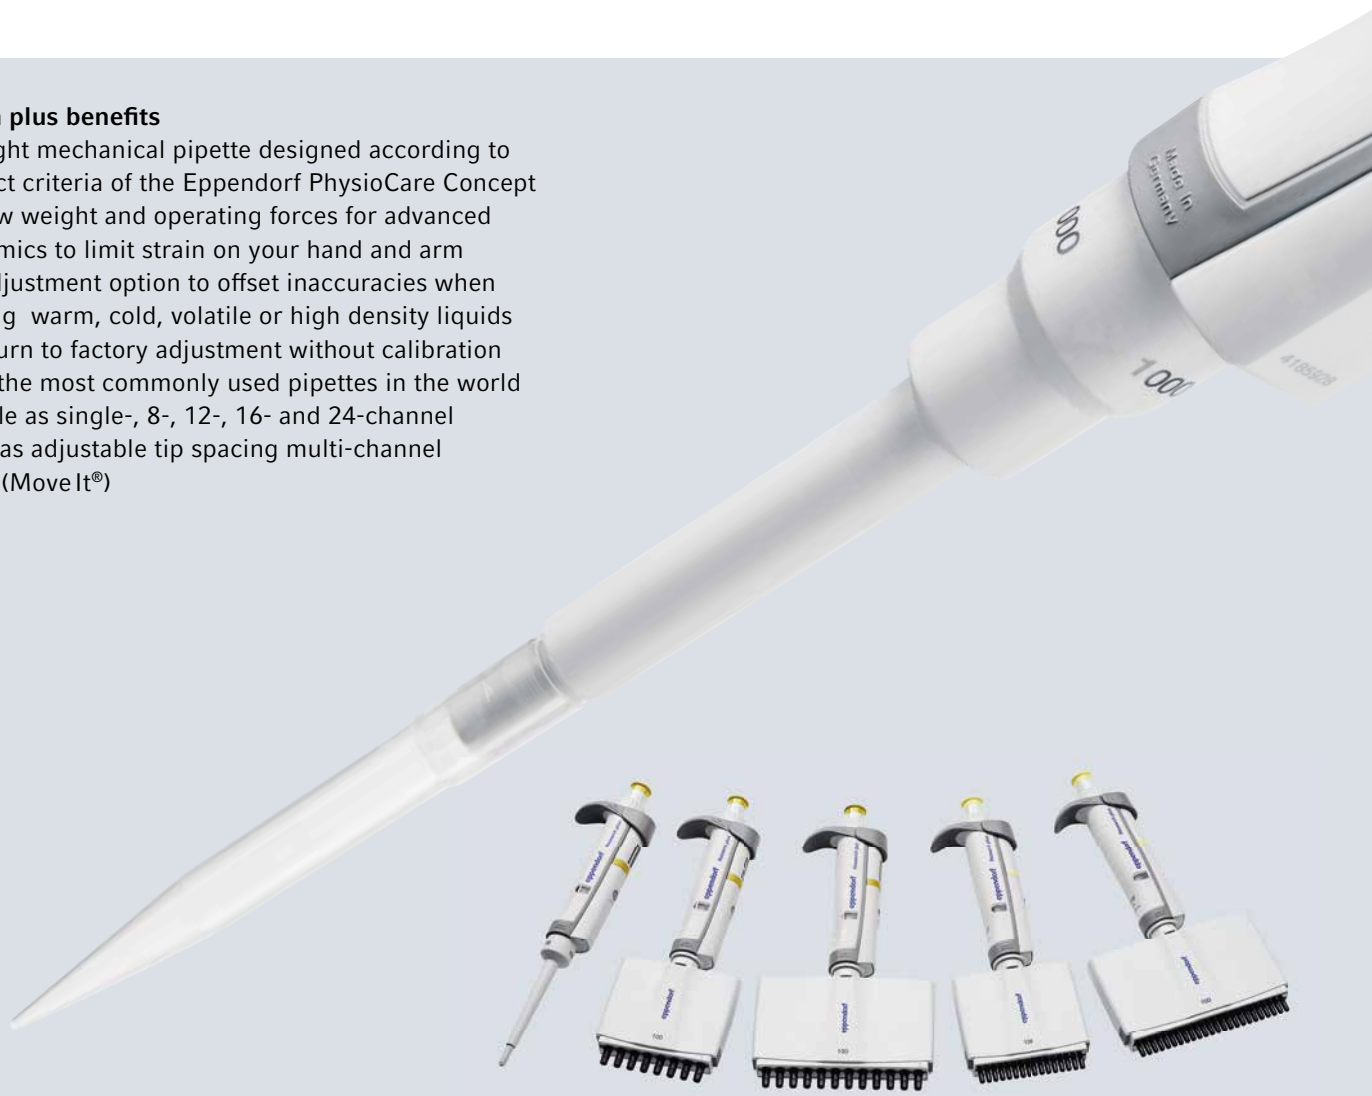

> Learn more about  
Eppendorf 16- & 24-channel pipettes at  
[www.eppendorf.com/ready-set-pipette](http://www.eppendorf.com/ready-set-pipette)



reddot design award  
winner 2009



### High flexibility

Your new pipette should offer all the flexibility you need. Adjust your Research plus to your needs, autoclave the entire pipette or only the lower part. Choose among single-channel, multi-channel and fix-volume pipettes in different sizes.

### Temporary adjustment option for various liquid classes

Adjust your pipette in seconds for better accuracy when pipetting various difficult liquids like ethanol or even when pipetting at high altitudes.

### Advanced ergonomics

Feel the difference in weight, pipetting forces and the spring loaded tip cone\*.

### Low tip attachment force

Achieve optimal tightness and minimal attachment forces with the Eppendorf Research plus. The spring loaded tip cone\* helps to reduce stress without sacrificing tightness.


### Low tip ejection force

How many tips do you use per day? Even small differences in the tip ejection force make a big change if you do it day by day. With the Eppendorf Research plus, you'll benefit from one of the lowest tip ejection forces on the market.

### Spring-loaded tip cone\* for exactly reproducible tip fit

No need for rocking. Just a soft pressure is sufficient for tip attachment. Get extremely consistent sample pickup, even in multi-channel pipettes, and maximize user to user reproducibility for more uniform results among members of the lab.

\* Not available in all variants.

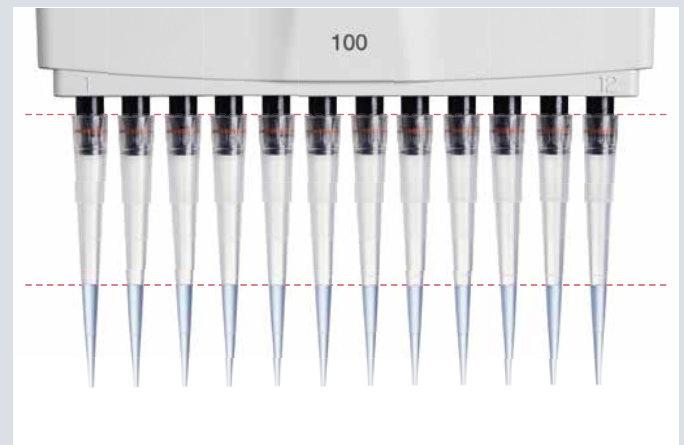


# Eppendorf Reference® 2

The name »Reference« stands for extraordinary precision and accuracy, a long service life, and an ergonomic design. With an innovative one-button operation, the Reference 2 allows fast and ergonomic handling with reduced operating efforts. Its unique smooth surface and autoclavability guarantee efficient decontamination making it the ideal companion when working under sterile conditions.

Our best material and the latest technologies are implemented in this pipette, making it a reliable partner for you and your demanding work.

## Reference 2 benefits

- > High precision and accuracy provides reliable results
- > 4-digit display for a more accurate volume setting (clearly visible from every angle)
- > Quick and secure volume setting, including volume lock
- > Fully autoclavable and easy-to-clean smooth surface
- > Color coded and volume labeling for quick identification of the volume size/tip size
- > Round upper part makes it possible to work in every position
- > Available as a single-channel pipette in fixed or variable volume as well as 8- and 12-channel pipette

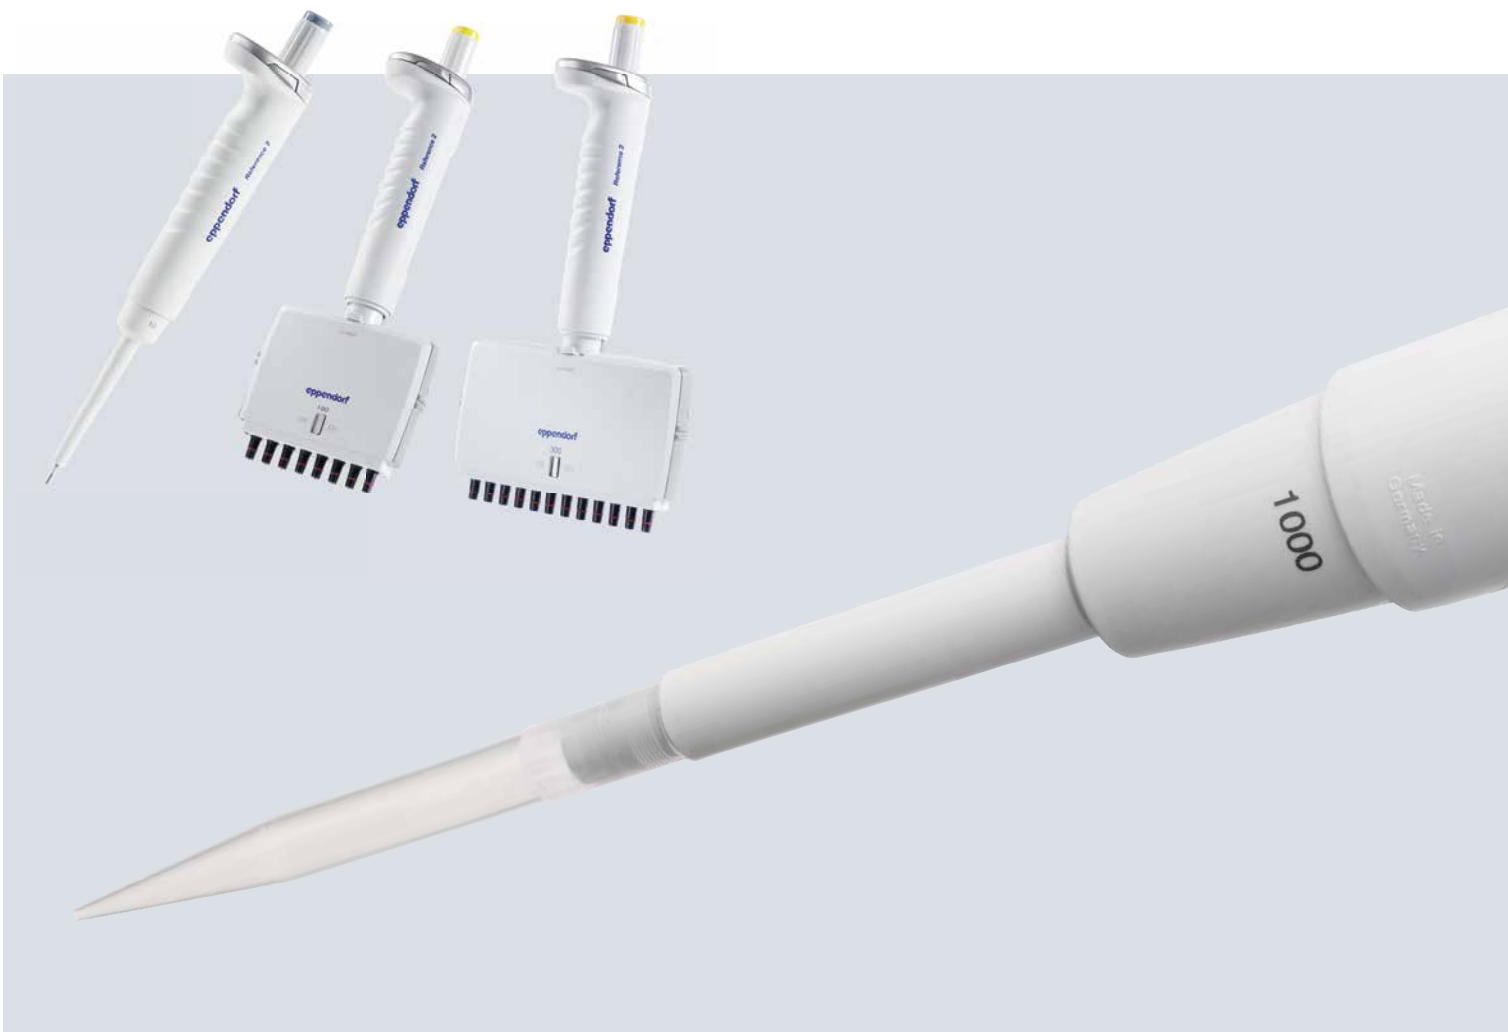

> Have a look in our brochure with this QR Code!





### User friendly temporary adjustment

For liquids other than aqueous solutions, pipettes have to be adjusted. The Reference 2 provides easy possibility to do so, leaving the factory settings untouched. Reset back to manufacturer setting just as quick and easy.



### Stainless steel upper part

The external edges made from stainless steel equip the Reference 2 with outstanding robustness at potential impact sites. It includes a quick volume setting and secure volume lock.



reddot design award  
winner 2013



GERMAN  
DESIGN  
AWARD  
SPECIAL  
2019



DESIGN  
AWARD



### Spring-loaded tip cone

Attach every tip with the same force – regardless of the user. Achieve optimal tightness with low attachment and ejection forces.

### Unique surface

Few grip marks and a smooth surface for comfortable working and simple cleaning. The Reference 2 is fully autoclavable without disassembling.

### Sturdy upper handle

Guarantees long service life and increased robustness.

### Heightened traceability

The serial number is printed on multiple components of the pipette. This prevents parts from being mixed up and indicates if one of the volume defining parts has been exchanged.

# Eppendorf Xplorer®/Eppendorf Xplorer® plus

People who give 100% every day deserve the best tools and the best equipment. You work on demanding problems, and important decisions depend on the results of your work. With the Eppendorf Xplorer and Xplorer plus, your work achieves a new level of simplicity, precision and reproducibility, which means no more delays due to complicated programming or inflexible processes.


## Xplorer/Xplorer plus benefits

- > Intuitive handling: Selection dial and multifunction rocker
- > Optimal ergonomics: Designed according to Eppendorf PhysioCare Concept
- > High reproducibility: Spring loaded tip cone, individual adjustment, and a motorized piston
- > Ease of use: After tip ejection, the piston automatically returns to the zero
- > Includes a history function that automatically saves the last parameters for faster handling
- > Full control: Edit and Help at the push of a button
- > Available as single-, 8-, 12-, 16-, and 24-channel as well as adjustable tip spacing multi-channel pipette (Move It®)



## 16- and 24-channel pipettes

The Eppendorf Xplorer plus is available as single-, 8-, 12-, 16- and 24-channel pipette.

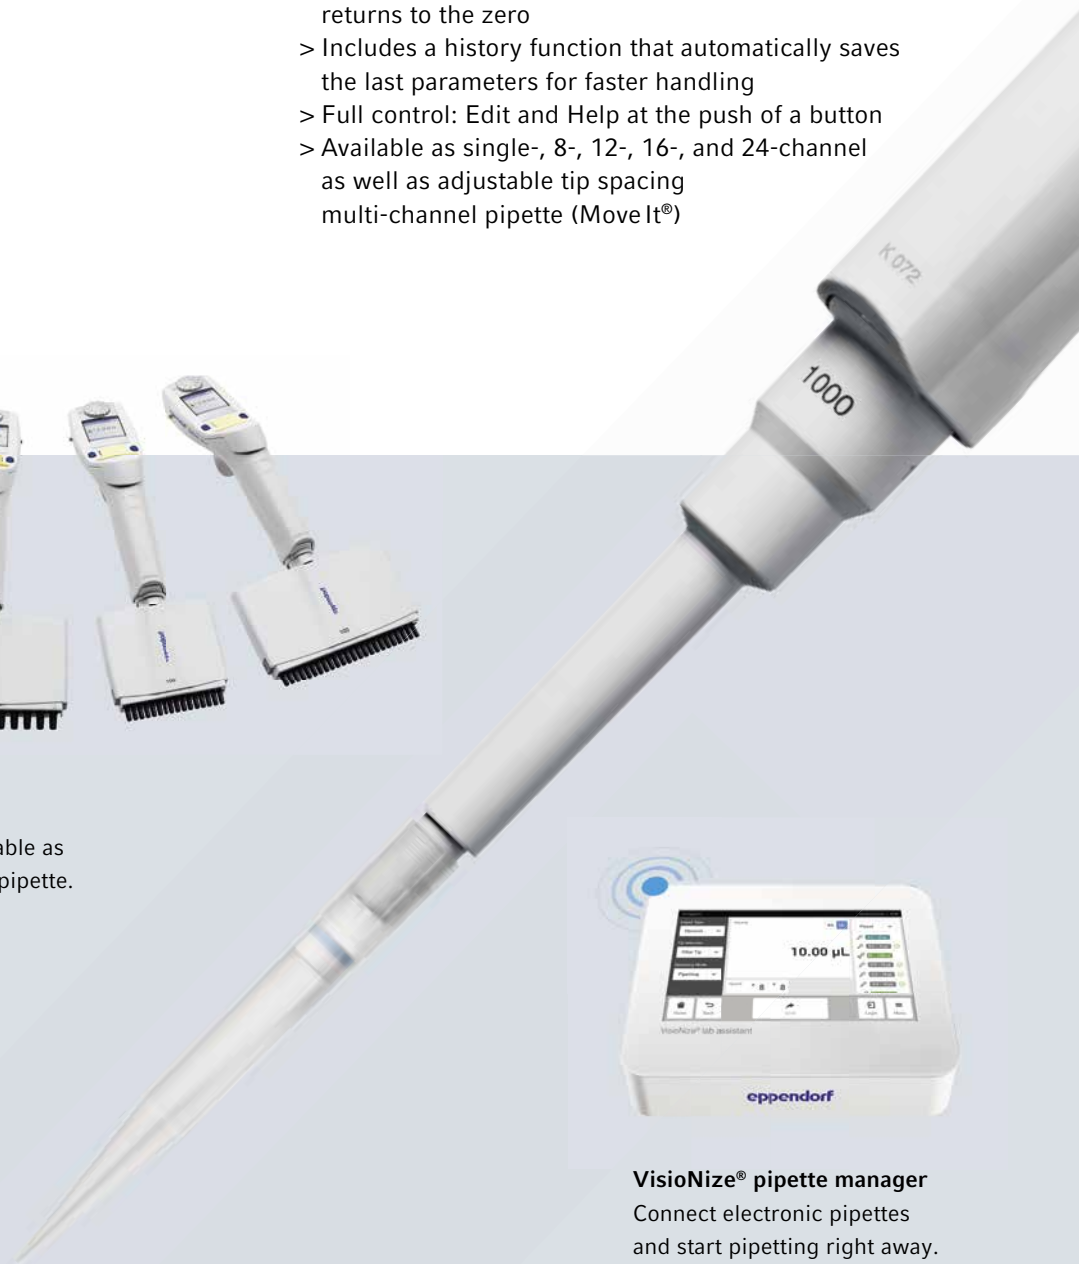

## VisioNize® pipette manager

Connect electronic pipettes and start pipetting right away. See more on page 28.



> Learn more about Eppendorf 16- & 24-channel pipettes at [www.eppendorf.com/ready-set-pipette](http://www.eppendorf.com/ready-set-pipette)



### Expanded version

The Eppendorf Xplorer plus is the perfect choice for all users who simply need a little extra – more safety and speed every day! With its additional intelligent modes, adjustable fixed volumes and individual settings, tasks are performed much faster and easier. A password can be entered to guarantee the highest degree of protection for your programming and settings.

To ensure adherence to service intervals and thus guarantee the accuracy of your results, the Xplorer plus offers an integrated service reminder. You can choose a reminder based on the period of time or on the frequency of use.



reddot design award  
best of the best



# Eppendorf Research<sup>®</sup> plus and Xplorer<sup>®</sup> plus Move It<sup>®</sup>

## Double your performance

Often, single-channel pipettes are used for multiple sample transfer from one vessel type to another, from tubes to plates for instance. This can be time-consuming and inconvenient, especially when throughput increases. Instead of pipetting many times, up to twelve samples can now be moved simultaneously with the 4-, 6-, 8- and 12-channel Move It<sup>®</sup> pipettes. Move It is equipped with adjustable cones for variable tip spacings according to your vessel format. This easy handling of format changes help reduce throughput time by 50 % and increase reproducibility of your results.

**Format limiter**  
Enabling quick switches backwards and forwards between the formats



## Move It benefits

- > Easy and fast format changes increasing your efficiency up to 50%
- > Less breaks needed thanks to an optimal balance in the hand
- > Rotatable pipette head 360° for fast identification of parameters
- > Tubeless design allows for increased durability, precision and autoclavability





#### Rotating lower part – 360°


- > Comfortable readability of display
- > Ergonomic and relaxed body posture

#### Adjustment knob

- > Tip spacing adjustable manually
- > Spacing adjustment without vibrations

#### Adjustable tip spacing

- > For microplates, sample tubes, agarose gels and further formats
- > Tip spacing freely selectable between 4.5 and 33 mm

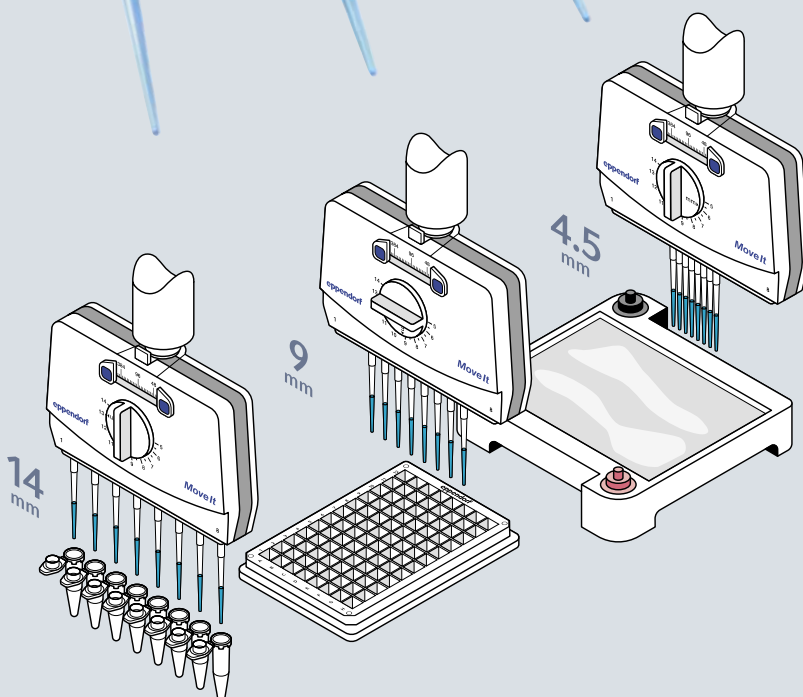

#### Tubeless system

- > Reliable robustness and precision
- > Easy autoclavability\*

#### Format change

- > Easy and fast among plates with up to 384 wells, 1.5 and 2.0 mL tubes and agarose gels

\* Xplorer plus lower part only, Research plus fully autoclavable

> Find more information on [www.eppendorf.com/move-it](http://www.eppendorf.com/move-it)





## epT.I.P.S.<sup>®</sup>

The fact that a tip fits onto a pipette cone does not say anything about the performance of the pipetting system comprising the components »Pipette and Tip«. The standard ISO 8655:2002 (1) considers pipettes and pipette tips as a system. Eppendorf as a system provider manufactures a system instead of single parts of it.

epT.I.P.S. pipette tips are available in purity grades of Eppendorf Quality, PCR clean and Biopur<sup>®</sup>. Packed as reloads, reusable boxes, racks for single-use and singles blistered in medical paper.



## epT.I.P.S.<sup>®</sup> 384

epT.I.P.S. 384 pipette tips are optimally coordinated to Eppendorf 16- and 24-channel pipettes Research plus and Xplorer plus. Process 384-well plates manually with highest level of tip tightness and coaxiality but extraordinary low operating forces.

epT.I.P.S. 384 are available in purity grades of Eppendorf Quality and PCR clean, packed as reusable box and reloads.




> Read here how pipette tips influence results:  
Application Note #354 »The Tip of the Iceberg«



# Twice as Fast in 384-Well Applications

With the advent of the high-throughput screening approach, which is widely used in the pharmaceutical industry, the need for microplates with a larger number of wells arose.


The 384-well microplate was then developed and implemented as a consumable for drug development assays.

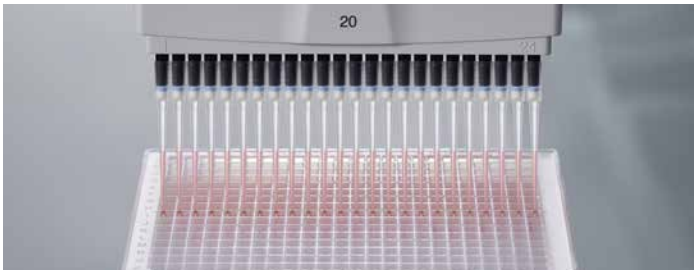

## 16 / 24-channel pipettes and epT.I.P.S.<sup>®</sup> 384

With the lightweight Research plus or the fast and precise Xplorer plus you get a higher volume of precision work done. Get extremely consistent sample pickup across all channels and fill a complete 384-well plate within 1 minute. It couldn't be easier to perfectly hit all 384 wells as the epT.I.P.S. 384 have an extremely fine tip shape, and an extraordinary coaxiality which enables a perfect tip alignment.

[www.ependorf.com/ready-set-pipette](http://www.ependorf.com/ready-set-pipette)

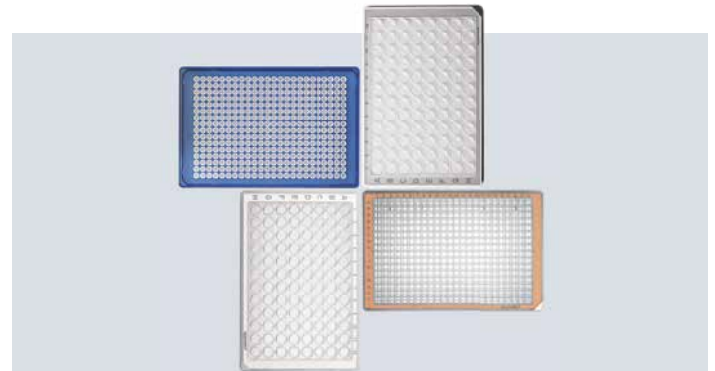

## 384-well Plates

Eppendorf consumables with their unique features make every day routines faster, easier, and more reliable. Eppendorf 384-well plates are available as Deep well plates (384/200  $\mu$ L), Microplates (384/F and 384/V), Assay/Reader Microplates (384/V black and white), Protein and DNA LoBind and twin.tec<sup>®</sup> PCR plates.

[www.ependorf.com/plates](http://www.ependorf.com/plates)

## Also interesting

Eppendorf ThermoMixer<sup>®</sup> FP



[www.ependorf.com/thermomixer](http://www.ependorf.com/thermomixer)

Eppendorf Centrifugation



[www.ependorf.com/centrifuges](http://www.ependorf.com/centrifuges)

Mastercycler<sup>®</sup> X50h



[www.ependorf.com/mastercycler](http://www.ependorf.com/mastercycler)



# Multipette® M4

The Eppendorf Multipette M4 is the ideal precision instrument for completing long pipetting series without the need for repeated liquid aspiration.

The Multipette is the tool of choice when working with liquids that possess demanding physical properties like high viscosity, density or volatility. With the Multipette/Combitip system, volumes are dispensed using the positive displacement principle. The liquid is directly dispensed without an air-cushion, ensuring highest precision regardless of the physical properties of the liquid.

## Multipette M4 benefits

- > Automatic Combitip advanced recognition eliminates time-consuming volume calculations
- > Dispensing up to 100 times without refilling the Combitip
- > Wide dispensing range: 1 µL to 10 mL
- > Stress-free work via integrated step counter: Dispensing procedures can be continued error-free after an interruption or distraction
- > Fully emptied Combitip can be easily ejected with one hand using the operating lever



reddot design award  
winner 2013



### Precision for challenging liquids

The Multipette M4 can precisely dispense even viscous, volatile, foaming and high-density liquids.



### Time saving

The Multipette M4 helps to make long dispensing series easier, safer, and faster.



> Pipette even challenging liquids like an expert:  
[www.eppendorf.com/pipetting](http://www.eppendorf.com/pipetting)

# Multipette® E3/E3x

The Multipettes E3 and E3x make your everyday pipetting routines faster, easier and more precise. They combine the advantages of a positive displacement dispenser, time saving and precise handling of challenging liquids, with those of an electronic pipette. Even tough-to-handle liquids like cream can be dispensed in combination with the ViscoTip®.

The Multipette E3 and E3x offer the same benefits as the M4.

## Additional benefits of the Multipette E3 and E3x

- > Defined aspiration and dispensing speed for highest reproducibility of results (eight different speed levels)
- > Easy to read: Enlarged color display, optimized contrast, clear arrangement of all parameters
- > Store up to 225 different parameter settings to save programming time for routine applications
- > All selected parameters shown at one glance
- > Display/operating menu in 9 different languages
- > RFID chip contains all relevant data regarding the Multipette



Feature	Multipette E3	Multipette E3x
High speed aspiration and dispensing with motorized piston	<input type="checkbox"/>	<input type="checkbox"/>
Automatic Combitips advanced® tip recognition	<input type="checkbox"/>	<input type="checkbox"/>
One button tip ejection	<input type="checkbox"/>	<input type="checkbox"/>
Volume range from 1 µl to 50 ml	<input type="checkbox"/>	<input type="checkbox"/>
Li-ion battery	<input type="checkbox"/>	<input type="checkbox"/>
Illuminated display	<input type="checkbox"/>	<input type="checkbox"/>
Automatic dispensing	<input type="checkbox"/>	<input type="checkbox"/>
Pipetting	<input type="checkbox"/>	<input type="checkbox"/>
Dispensing	<input type="checkbox"/>	<input type="checkbox"/>
Aspirate (aspiration of supernatants)	<input type="checkbox"/>	<input type="checkbox"/>
Titrate	<input type="checkbox"/>	<input type="checkbox"/>
Sequential dispensing	<input type="checkbox"/>	<input type="checkbox"/>
Combined aspiration and dispensing mode	<input type="checkbox"/>	<input type="checkbox"/>

> Multipette E3 and Multipette E3x are the experts for long series pipetting and liquids with demanding physical properties: [www.eppendorf.com/multipette-system](http://www.eppendorf.com/multipette-system)



# Combitips advanced®

In combination with the Multipipette M4 and E3/E3x, Combitips advanced form an ideal system for a broad range of liquid handling applications.

## Combitips advanced benefits

- > Time savings for long dispensing/pipetting series
- > High-precision dispensing regardless of the physical properties of the liquid (e.g., viscosity, volatility, density, temperature...)
- > Prevention of aerosol contamination with hermetically sealed piston
- > Protection from radioactive and toxic substances
- > 9 available volume sizes (0.1 mL–50 mL) offer a maximum range of dispensing volumes
- > Individually color coded: Quick identification of the desired Combitips facilitates the workflow (color coding is also visible on packaging)



## Elongated tips (for 2.5 mL, 5 mL, 10 mL)

Complete emptying of all common tubes prevents sample loss



## Variety and selection

With 9 volume sizes (0.1 mL to 50 mL) and 4 purity grades (Eppendorf Quality™, PCR clean, Eppendorf Biopur®, and Forensic DNA grade) you will always find the perfect Combitip for your application!




> Choose the optimal Combitip for your volume with the help of our Combitip selection guide:  
[www.eppendorf.com/combitips-advanced](http://www.eppendorf.com/combitips-advanced)

# ViscoTip®

Let it flow! The new Multipette consumable ViscoTip® is specialized on tough-to-handle liquids like cream. Therefore, ViscoTip naturally expands the broad range of applications for our often copied, never equaled Combitips advanced® / Multipette system. For fast, precise and safe liquid handling.

## ViscoTip benefits

- > Specialized for liquids with a dynamic viscosity from 200 mPa\*s to 14,000 mPa\*s
- > For dispensing volumes from 100 µL to 10 mL in increments of 10 µL
- > Significantly lower operation force, thus speeding up work and reducing energy consumption
- > Automatic tip recognition and volume calculation
- > Free of experiment-interfering leachables and slip agents

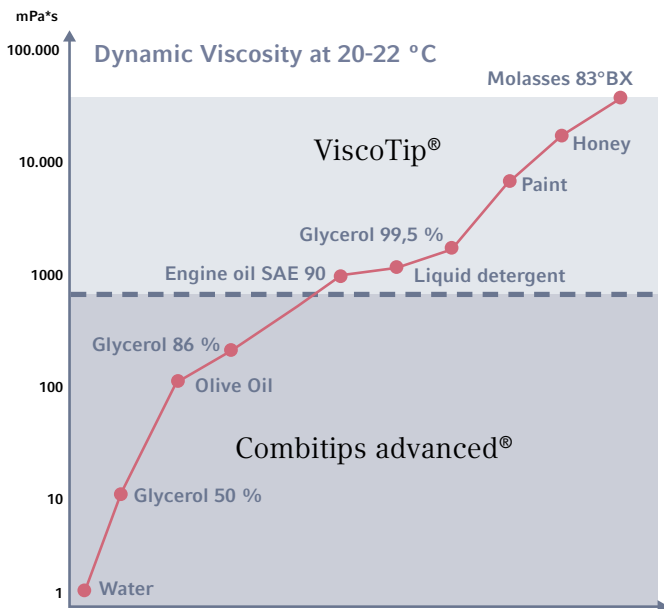

## Dynamic viscosity

The ViscoTip is specifically designed and optimized for handling high viscosity liquids up to 14,000 mPa\*s such as Glycerol 99.5%, Tween, oils, cremes, shampoos or honey. It sharply reduces operating forces while handling such liquids leading to enhanced ergonomics, increased working speed and longer charge life time of your Multipette battery.



> Find more information on [www.eppendorf.com/multipette-viscotip](http://www.eppendorf.com/multipette-viscotip)



## Easypet® 3

It has never been easier to combine speed, safety, precision and comfort. Experience a new dimension of speed control and precision by intuitive, convenient speed adjustment. You will always be informed about your battery status with the vibrantly backlit LED battery meter.



reddot design award  
winner 2013



## Pipet Helper®

The Eppendorf Pipet Helper is a pipet controller which covers the range of bulb and graduated pipettes from 0.1 to 200 mL. The valve system allows for convenient operation without effort. Low weight and optimized design with ergonomic arrangement of functions.

### Eppendorf serological pipets

The serological pipets are made of ultra-clear virgin polystyrene. They have a sterility assurance level of  $10^{-6}$  and a certified absence of detectable pyrogens, DNA, RNase and DNase, non-cytotoxic.





## Varipette® 4720

The Varipette is a continuously adjustable pipette that works according to the air-cushion and positive displacement principle. Thus the pipette is especially designed for precise pipetting of liquids with high vapor pressure or viscosity. The Varitip® P and S system are tailored to different vessels.



## Varispenser® 2/2x

Varispenser 2/2x are ideal for dispensing aliquots of liquid from supply bottles. Available in 6 sizes for 0.2–100 mL and fully autoclavable. Varispenser 2x has a recirculation valve which prevents reagent loss while ventilating.



## Eppendorf Top Buret™

The Eppendorf Top Buret sets standards for manual titration. Its pulse-free dispensing technique allows continuous dispensing of liquid with precision values within required limits.



# The Future is Now! Connect your pipetting network

Who doesn't enjoy greater freedom and convenience when it comes to pipetting? Be ahead of the curve! Switch to connected electronic pipettes and boost your individual pipetting skills while bringing teamwork up to a new level.

- > How quickly can you set your parameters?
- > How accurate are your results?
- > How do you work in teams when pipetting at the bench?

## Evolve your electronic pipette with the VisioNize® pipette manager

Our system connects multiple electronic pipettes, thereby not only improving speed and accuracy for a single user, but across your entire lab. Easily convert your Eppendorf Xplorer® and Eppendorf Xplorer® plus electronic pipettes into a connected electronic pipette with the WiFi module.

Connect to the VisioNize pipette manager and take your pipetting to the next level.



## How does the VisioNize pipette manager system works?



1. Convert Eppendorf Xplorer® and Xplorer® plus pipettes into connected electronic pipettes.

2. VisioNize pipette manager – External touch server establishes communication with connected electronic pipettes and tablets via WiFi technology.

3. Connect your tablet (Android and iOS) to work in parallel with other lab users.



> Check requirements under:  
[www.eppendorf.com/visionize-pipette-manager](http://www.eppendorf.com/visionize-pipette-manager)

# Eppendorf Pipette Holder System

Carousels, stands and wall mount devices: The Pipette Holder System is perfect for all users of handheld liquid handling instruments, who need a highly flexible system for their Eppendorf pipettes and Multipettes®.

To save precious bench-top space carousels carry both mechanical and electronic instruments.



reddot award 2018  
winner



GERMAN  
DESIGN  
AWARD  
WINNER  
2018



GOLDEN  
PIN  
DESIGN  
AWARD



Rotatable carousel holder in two variants to hold or hold and charge up to six instruments. High flexibility due to exchangeable adapters



Pipette stands as holder or including a charging function for single devices. High flexibility due to exchangeable adapter



Various holders for wall-mounting, installation on a shelf above the bench or inside biological safety cabinets

## epMotion® 96 and epMotion® 96xl

The Eppendorf epMotion 96 is an easy to use bench top system for high precision pipetting in 96- and 384-well plates. As an affordable solution it overcomes the limits of manual multi-channel pipetting and will optimize your applications by faster and more precise simultaneous 96-well pipetting.

### Features

- > Large volume range of 0.5–300 µL (epMotion 96) or 5–1,000 µL (epMotion 96xl)
- > Use of different tip sizes without changing the pipetting head
- > Auto-detection of tip size
- > Intuitive and App-based software and convenient touch screen control
- > Intelligent, preset applications: aspiration, dilution, multi-dispense, pipette and mix, reverse pipetting and more
- > Individual speed settings to match different liquid types
- > 2-position slider for quick access to source and destination
- > Compact design to fit under the laminar flow hood
- > Reduced risk of repetitive strain injury (RSI)

### Applications

- > Replication and reformatting of 96- or 384-well plates
- > PCR set-up in whole plates
- > Cell seeding and media change
- > Reagent and compound addition
- > 384 wells by 4 times 96 well pipetting
- > Cell-based assays
- > ELISA and other immuno-assays in plates
- > Biochemical assays



> Watch our video for easy operation of epMotion 96 on our YouTube channel

## epMotion® 5070

Our small member of the epMotion family is the most compact solution for accurate and reproducible automated liquid handling. This makes the epMotion 5070 a perfect match for any routine application in your laboratory.

### Features

- > 4 SBS/SLAS worktable and 3 virtual positions
- > Maximum pipetting accuracy from 200 nL to 1,000 µL
- > Automatic exchange of two dispensing tools
- > Use of 1-channel and 8-channel dispensing tools
- > Optical sensor\*1 for detecting liquids, labware and tips
- > Completely contained housing including door safety mechanism
- > Option for EasyCon tablet or MultiCon PC controller by touch, mouse or keyboard, upgradable for barcode tracking and GLP software versions

\*1 Patent US 6,819,437 B2



### Applications

- > Serial dilutions
- > Liquid transfer from individual tubes to plates
- > Assay set-up
- > Reformatting plates
- > Simple PCR set-up
- > Normalization of sample concentrations or volumes
- > Cell media exchange



epMotion 5070 is your ideal partner for easy and reliable liquid handling, such as PCR, normalizations and serial dilutions.



## epMotion® 5073

The midsize epMotion 5073 is a flexible system for automating time-consuming and complex pipetting procedures. With its intuitive software, routine liquid handling tasks are easier than ever. The pipetting procedure is more precise, reproducible, and fully standardized, making your workplace more ergonomic and safer.

### Features

- > Same as 5070 plus
- > 6-position worktable
- > Option for gripper transport, 1 thermal module or Eppendorf MagSep™ 3D module
- > CleanCap option for UV decontamination and HEPA air filter
- > Optional MultiCon touch PC controller


### Applications

- > DNA and RNA purification
- > PCR set-up
- > Sample or reagent transfer
- > Sample mixing and temperature incubation
- > Assay set-up
- > Media change and other cell culture applications
- > NGS library preparation



### Eppendorf MagSep™ 3D Technology

Combination of magnetic finger module and Eppendorf ThermoMixer facilitates magnetic separation, mixing and temperature control in one location.

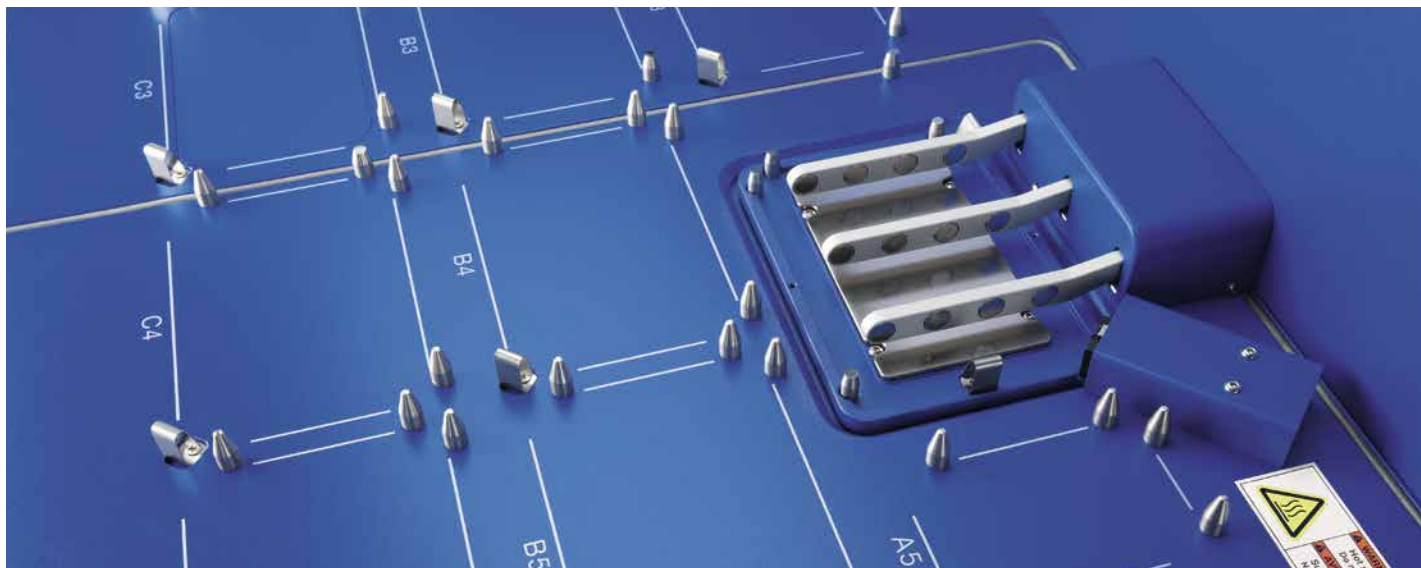

> Watch our video for flexible use of epMotion 5073 on our YouTube channel



## epMotion® 5075


With 12 to 15 worktable positions and many additional features the epMotion 5075 versions have a higher application flexibility. The epMotion 5075 is the ideal solution for advanced liquid handling demands. It offers the same outstanding accuracy and precision as epMotion 5070 & 5073.

### Features

- > Same as 5073 plus
- > Up to 15 worktable positions
- > MultiCon PC controller with simulation, network and software upgrade options
- > Automatic exchange of 4 dispensing tools
- > Option for gripper and 1–3 thermal modules
- > System control by touch, mouse, keyboard or network
- > Available Eppendorf ThermoMixer®, Vacuum manifold, and magnetic separation options
- > Available as CleanCap versions

### Applications

- > NGS library preparation
- > Distributing reagents and serial dilutions
- > Sample transfer from individual tubes to plates
- > Solid phase extraction
- > Bead applications with mixing and temperature incubation
- > Sequencing and PCR clean-up
- > Nucleic acid purification

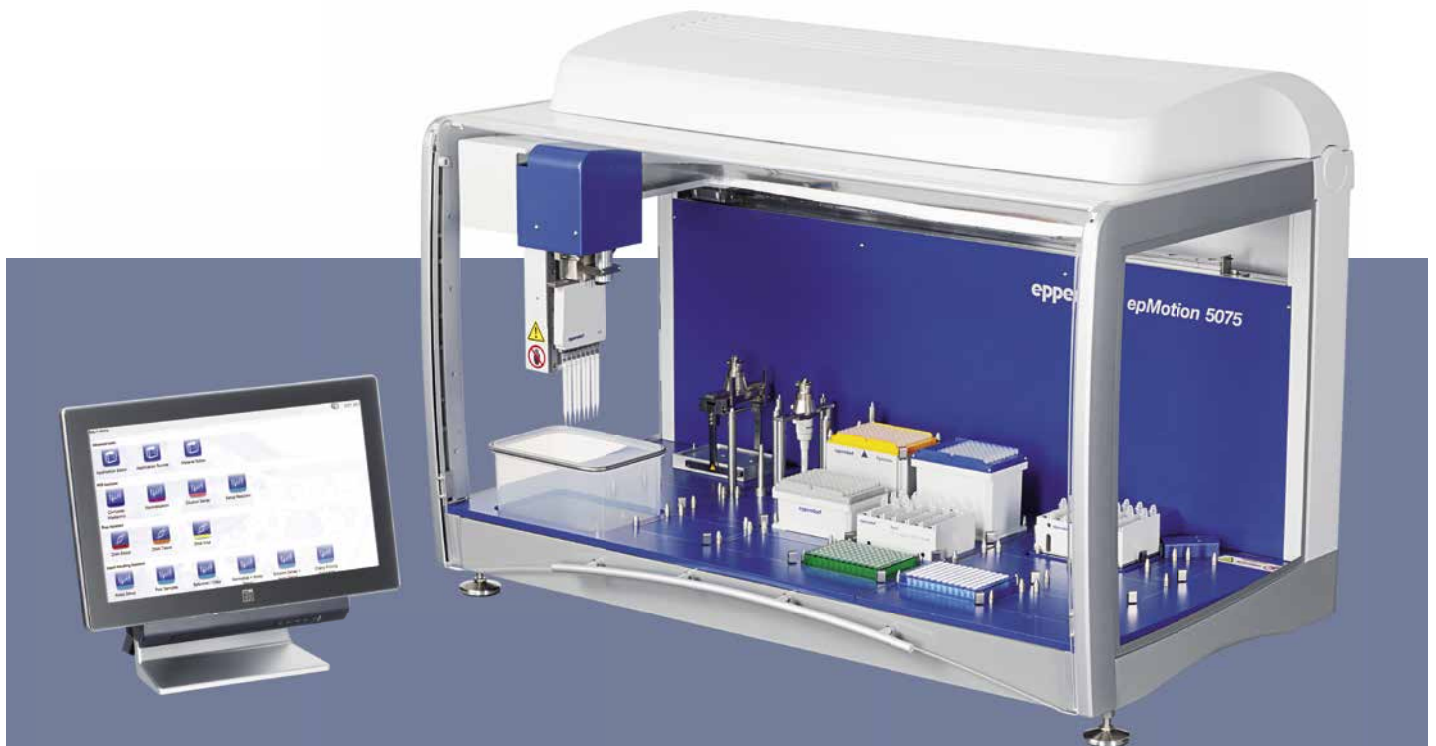

> A set of customer testimonial videos can be found on our YouTube channel



# The Eppendorf PhysioCare Concept®

The mission of Eppendorf has always been to improve the living conditions of our customers. Nowadays, where people spend a lot of their time at work, the ergonomics of their tools and the whole work environment is becoming more important for your well-being. Thus the development of each Eppendorf pipette is based on three spheres that support the health of our customers.



Each of these spheres offers stringent ergonomic criteria which are directly involved in the users work process:



## The User:

The PhysioCare Concept guarantees an ergonomic design and an optimized product performance according to the needs of the individual.

## The Lab:

The PhysioCare Concept allows the uncomplicated integration of instruments in the lab as well as adhering to its specific requirements.


## The Laboratory Workflow:

The PhysioCare Concept ensures general support to enhance processes around the lab and improve the results of the whole organization.



> Further information: [www.eppendorf.com/physiocare](http://www.eppendorf.com/physiocare)  
> Have a look in our brochure with this QR Code!

# Supporting You – Eppendorf Services

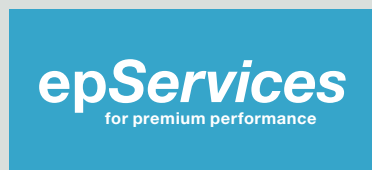

Application  
Support



Seminars  
and Training



Technical  
Support



Maintenance  
and Certification

At Eppendorf, we are committed to providing reliable services to help you maintain premium performance, and maximum safety of your Eppendorf instruments. Our carefully designed service solutions are performed by our dedicated Application, Training and Technical Service teams worldwide.

## Pipette Performance Plans

Pipettes are precision instruments with parts subject to normal wear and tear. This leads to imprecision over the time. Therefore, regular maintenance and calibration of your pipettes are fundamental to their proper function, precision, and accuracy. With our Pipette Performance Plans we offer certified calibration services for all pipettes – not only Eppendorf: from quick economical calibration to ISO 17025 accredited calibration services.

## Liquid Handling Training

The operator's experience is also very important for achieving good pipetting results. In our most popular training you will learn about the principles of pipetting ergonomics, correct pipetting techniques, routine maintenance and pipette calibration.

Especially the precision and accuracy of the pipettes and the dispensing tools of semi-/automated liquid handling devices are important for the quality and reproducibility of all your work results. With the Performance Plans from Eppendorf we offer you a range of quality maintenance and certification services for different user requirements.

## epMotion® 96 Performance Plans

Maintaining and verifying your semi-automated pipette accuracy and precision makes sure your system still dispenses according to the manufacturer specifications. In the end you will receive assured results with your downstream applications and your valuable samples and reagents.

## epMotion® Performance Plans

Our qualified service technicians will take care of the maintenance of your epMotion® to ensure its long life-time. Our Certification Services include all tests, calibration services and documentation needed for Installation and Operational Qualification (IQ/OQ).



> For more information, service ordering details and contact form please visit [www.eppendorf.com/epServices](http://www.eppendorf.com/epServices)



# Eppendorf Research<sup>®</sup> plus

## Eppendorf Research<sup>®</sup> plus, single-channel, variable volume\*<sup>1</sup>

Volume range	Color code	Volume	Systematic error* <sup>2</sup>		Random error* <sup>2</sup>		Order no.
0.1–2.5 µL	■ dark gray (for epT.I.P.S. <sup>®</sup> 10 µL)	0.1 µL	±48.0%	±0.048 µL	±12.0%	±0.012 µL	3123 000 012
		0.25 µL	±12.0%	±0.03 µL	±6.0%	±0.015 µL	
		1.25 µL	±2.5%	±0.031 µL	±1.5%	±0.019 µL	
		2.5 µL	±1.4%	±0.035 µL	±0.7%	±0.018 µL	
0.5–10 µL	■ medium gray (for epT.I.P.S. <sup>®</sup> 20 µL)	0.5 µL	±8.0%	±0.04 µL	±5.0%	±0.025 µL	3123 000 020
		1 µL	±2.5%	±0.025 µL	±1.8%	±0.018 µL	
		5 µL	±1.5%	±0.075 µL	±0.8%	±0.04 µL	
		10 µL	±1.0%	±0.1 µL	±0.4%	±0.04 µL	
2–20 µL	■ light gray (for epT.I.P.S. <sup>®</sup> 20 µL L)	2 µL	±5.0%	±0.1 µL	±1.5%	±0.03 µL	3123 000 098
		10 µL	±1.2%	±0.12 µL	±0.6%	±0.06 µL	
		20 µL	±1.0%	±0.2 µL	±0.3%	±0.06 µL	
2–20 µL	■ yellow (for epT.I.P.S. <sup>®</sup> 200 µL)	2 µL	±5.0%	±0.1 µL	±1.5%	±0.03 µL	3123 000 039
		10 µL	±1.2%	±0.12 µL	±0.6%	±0.06 µL	
		20 µL	±1.0%	±0.2 µL	±0.3%	±0.06 µL	
10–100 µL		10 µL	±3.0%	±0.3 µL	±1.0%	±0.1 µL	3123 000 047
		50 µL	±1.0%	±0.5 µL	±0.3%	±0.15 µL	
		100 µL	±0.8%	±0.8 µL	±0.2%	±0.2 µL	
20–200 µL		20 µL	±2.5%	±0.5 µL	±0.7%	±0.14 µL	3123 000 055
		100 µL	±1.0%	±1.0 µL	±0.3%	±0.3 µL	
		200 µL	±0.6%	±1.2 µL	±0.2%	±0.4 µL	
30–300 µL	■ orange (for epT.I.P.S. <sup>®</sup> 300 µL)	30 µL	±2.5%	±0.75 µL	±0.7%	±0.21 µL	3123 000 101
		150 µL	±1.0%	±1.5 µL	±0.3%	±0.45 µL	
		300 µL	±0.6%	±1.8 µL	±0.2%	±0.6 µL	
100–1,000 µL	■ blue (for epT.I.P.S. <sup>®</sup> 1,000 µL)	100 µL	±3.0%	±3.0 µL	±0.6%	±0.6 µL	3123 000 063
		500 µL	±1.0%	±5.0 µL	±0.2%	±1.0 µL	
		1,000 µL	±0.6%	±6.0 µL	±0.2%	±2.0 µL	
0.25–2.5 mL	■ red (for epT.I.P.S. <sup>®</sup> 2.5 mL)	0.25 mL	±4.8%	±0.012 mL	±1.2%	±0.003 mL	3123 000 144
		1.25 mL	±0.8%	±0.01 mL	±0.2%	±0.0025 mL	
		2.5 mL	±0.6%	±0.015 mL	±0.2%	±0.005 mL	
0.5–5 mL	■ purple (for epT.I.P.S. <sup>®</sup> 5 mL)	0.5 mL	±2.4%	±0.012 mL	±0.6%	±0.003 mL	3123 000 071
		2.5 mL	±1.2%	±0.03 mL	±0.25%	±0.006 mL	
		5 mL	±0.6%	±0.03 mL	±0.15%	±0.008 mL	
1–10 mL	■ turquoise (for epT.I.P.S. <sup>®</sup> 10 mL)	1 mL	±3.0%	±0.03 mL	±0.6%	±0.006 mL	3123 000 080
		5 mL	±0.8%	±0.04 mL	±0.2%	±0.01 mL	
		10 mL	±0.6%	±0.06 mL	±0.15%	±0.015 mL	

\*<sup>1</sup> Eppendorf Research<sup>®</sup> plus single-channel variable volume pipettes up to 1,000 µL include an epT.I.P.S.<sup>®</sup> box. The 5 mL and 10 mL versions include an epT.I.P.S.<sup>®</sup> sample bag.

\*\*<sup>2</sup> The error data, according to EN ISO 8655, only apply if original Eppendorf tips are used. Technical specifications are subject to change. Errors and omissions excepted.

# Eppendorf Research® plus

Eppendorf Research® plus, multi-channel, variable volume\*1

Volume range	Channels	Color code	Volume	Systematic error*2	Random error*2					
0.5–10 µL		■ medium gray (for epT.I.P.S.® 20 µL)	0.5 µL	±12.0%	±0.06 µL	±8.0%	±0.04 µL			
			1 µL	±8.0%	±0.08 µL	±5.0%	±0.05 µL			
			5 µL	±4.0%	±0.2 µL	±2.0%	±0.1 µL			
			10 µL	±2.0%	±0.2 µL	±1.0%	±0.1 µL			
10–100 µL		■ yellow (for epT.I.P.S.® 200 µL)	10 µL	±3.0%	±0.3 µL	±2.0%	±0.2 µL			
			50 µL	±1.0%	±0.5 µL	±0.8%	±0.4 µL			
			100 µL	±0.8%	±0.8 µL	±0.3%	±0.3 µL			
30–300 µL		■ orange (for epT.I.P.S.® 300 µL)	30 µL	±3.0%	±0.9 µL	±1.0%	±0.3 µL			
			150 µL	±1.0%	±1.5 µL	±0.5%	±0.75 µL			
			300 µL	±0.6%	±1.8 µL	±0.3%	±0.9 µL			
50–1,200 µL	8 -channel	■ dark green	120 µL	±6.0%	±7.2 µL	±0.9%	±1.08 µL			
			600 µL	±2.7%	±16.2 µL	±0.4%	±2.4 µL			
			1.200 µL	±1.2%	±14.4 µL	±0.3%	±3.6 µL			
50–1,200 µL	12-channel	■ dark green	120 µL	±6.0%	±7.2 µL	±0.9%	±1.08 µL			
			600 µL	±2.7%	±16.2 µL	±0.4%	±2.4 µL			
			1.200 µL	±1.2%	±14.4 µL	±0.3%	±3.6 µL			
1–100 µL	16-channel	■ light pink (for epT.I.P.S.® 384 20 µL)	1–20 µL	1 µL	±12%	±0.12 µL	±8%	±0.08 µL		
				2 µL	±8%	±0.16 µL	±5%	±0.1 µL		
				10 µL	±4%	±0.4 µL	±2%	±0.2 µL		
				20 µL	±2%	±0.4 µL	±1%	±2.0 µL		
				5-100 µL	■ light yellow (for epT.I.P.S.® 384 100 µL)	5 µL	±6%	±0.3 µL	±4%	±0.2 µL
						10 µL	±3%	±0.3 µL	±2%	±0.2 µL
	50 µL	±1.2%	±0.6 µL			±0.8%	±0.4 µL			
	100 µL	±1%	±1 µL			±0.6%	±0.6 µL			
	24-channel	■ light pink (for epT.I.P.S.® 384 20 µL)	1–20 µL			1 µL	±12%	±0.12 µL	±8%	±0.08 µL
						2 µL	±8%	±0.16 µL	±5%	±0.1 µL
				10 µL	±4%	±0.4 µL	±2%	±0.2 µL		
				20 µL	±2%	±0.4 µL	±1%	±0.2 µL		
5-100 µL				■ light yellow (for epT.I.P.S.® 384 100 µL)	5 µL	±6%	±0.3 µL	±4%	±0.2 µL	
					10 µL	±3%	±0.3 µL	±2%	±0.2 µL	
	50 µL	±1.2%	±0.6 µL		±0.8%	±0.4 µL				
	100 µL	±1%	±1 µL		±0.6%	±0.6 µL				

\*1 Eppendorf Research® plus multi-channel variable volume pipettes include an epT.I.P.S.® box.

For 96-well plates		For 384-well plates	
Order no. 8-channel	Order no. 12-channel	Order no. 16-channel	Order no. 24-channel
Cone distance		Cone distance	
9 mm	9 mm	4.5 mm	4.5 mm
3125 000 010	3125 000 028	-	-
3125 000 036	3125 000 044	-	-
3125 000 052	3125 000 060	-	-
3125 000 214	-	-	-
-	3125 000 222	-	-
-	-	3125 000 079	-
-	-	3125 000 095	-
-	-	-	3125 000 087
-	-	-	3125 000 109



# Eppendorf Research<sup>®</sup> plus

## Eppendorf Research<sup>®</sup> plus, single-channel, fixed volume

Volume	Color code	Systematic error* <sup>1</sup>		Random error* <sup>1</sup>		Order no.
10 µL	■ medium gray (for epT.I.P.S. <sup>®</sup> 20 µL)	±1.2%	±0.12 µL	±0.6%	±0.06 µL	3124 000 016
20 µL	■ light gray (for epT.I.P.S. <sup>®</sup> 20 µL L)	±0.8%	±0.16 µL	±0.3%	±0.06 µL	3124 000 032
10 µL	■ yellow (for epT.I.P.S. <sup>®</sup> 200 µL)	±1.2%	±0.12 µL	±0.6%	±0.06 µL	3124 000 024
20 µL		±1.0%	±0.2 µL	±0.3%	±0.06 µL	3124 000 040
25 µL		±1.0%	±0.25 µL	±0.3%	±0.08 µL	3124 000 059
50 µL		±0.7%	±0.35 µL	±0.3%	±0.15 µL	3124 000 067
100 µL	■ blue (for epT.I.P.S. <sup>®</sup> 1,000 µL)	±0.6%	±0.6 µL	±0.2%	±0.2 µL	3124 000 075
200 µL		±0.6%	±1.2 µL	±0.2%	±0.4 µL	3124 000 083
200 µL		±0.6%	±1.2 µL	±0.2%	±0.4 µL	3124 000 091
250 µL		±0.6%	±1.5 µL	±0.2%	±0.5 µL	3124 000 105
500 µL		±0.6%	±3.0 µL	±0.2%	±1.0 µL	3124 000 113
1 000 µL		±0.6%	±6.0 µL	±0.2%	±2.0 µL	3124 000 121

\*<sup>1</sup> The error data, according to EN ISO 8655, only apply if original Eppendorf tips are used. Technical specifications are subject to change. Errors and omissions excepted.

## Accessories

	Order no.
<b>Tip-Tub reagent reservoir</b> , autoclavable reservoir for aspirating liquids with multi-channel pipettes, 1 set = 10 reservoirs and 10 lids	0030 058 607
<b>Eppendorf TrackIT</b>	3903 000 014

## Eppendorf Research<sup>®</sup> plus 3-pack including epT.I.P.S.<sup>®</sup> box and Eppendorf ballpoint pen

	Order no.
<b>Option 1:</b> 0.5–10 µL, 10–100 µL, 100–1,000 µL	3123 000 900
<b>Option 2:</b> 2–20 µL yellow, 20–200 µL, 100–1,000 µL	3123 000 918
<b>Option 3:</b> 100–1,000 µL, 0.5–5 mL, 1–10 mL	3123 000 926

# Eppendorf Reference<sup>®</sup> 2

## Eppendorf Reference<sup>®</sup> 2, single-channel, variable volume\*1

Volume range	Color code	Volume	Systematic error*2		Random error*2		Order no.
0.1–2.5 µL	■ dark gray (for epT.I.P.S. <sup>®</sup> 10 µL)	0.1 µL	±48.0%	±0.048 µL	± 12.0%	±0.012 µL	4924 000 010
		0.25 µL	±12.0%	±0.03 µL	±6.0%	±0.015 µL	
		1.25 µL	±2.5%	±0.031 µL	±1.5%	±0.019 µL	
		2.5 µL	±1.4%	±0.035 µL	±0.7%	±0.018 µL	
0.5–10 µL	■ medium gray (for epT.I.P.S. <sup>®</sup> 20 µL)	0.5 µL	±8.0%	± 0.040 µL	±5.0%	±0.025 µL	4924 000 029
		1 µL	±2.5%	±0.025 µL	±1.8%	±0.018 µL	
		5 µL	±1.5%	±0.075 µL	±0.8%	±0.04 µL	
		10 µL	±1.0%	±0.10 µL	±0.4%	±0.04 µL	
2–20 µL	■ light gray (for epT.I.P.S. <sup>®</sup> 20 µL L)	2 µL	±3.0%	±0.06 µL	±1.5%	±0.03 µL	4924 000 037
		10 µL	±1.0%	±0.10 µL	±0.6%	±0.06 µL	
		20 µL	±0.8%	±0.16 µL	±0.3%	±0.06 µL	
2–20 µL	■ yellow (for epT.I.P.S. <sup>®</sup> 200 µL)	2 µL	±5.0%	±0.10 µL	±1.5%	±0.03 µL	4924 000 045
		10 µL	±1.2%	±0.12 µL	±0.6%	±0.06 µL	
		20 µL	±1.0%	±0.2 µL	±0.3%	±0.06 µL	
10–100 µL		10 µL	±3.0%	±0.3 µL	±0.7%	±0.07 µL	4924 000 053
		50 µL	±1.0%	±0.5 µL	±0.3%	±0.15 µL	
		100 µL	±0.8%	±0.8 µL	±0.20%	±0.20 µL	
20–200 µL		20 µL	±2.5%	±0.5 µL	±0.7%	±0.14 µL	4924 000 061
		100 µL	±1.0%	±1.0 µL	±0.3%	±0.3 µL	
		200 µL	±0.6%	±1.2 µL	±0.2%	±0.4 µL	
30–300 µL	■ orange (for epT.I.P.S. <sup>®</sup> 300 µL)	30 µL	±2.5%	±0.75 µL	±0.7%	±0.21 µL	4924 000 070
		150 µL	±1.0%	±1.5 µL	±0.3%	±0.45 µL	
		300 µL	±0.6%	±1.8 µL	±0.2%	±0.6 µL	
100–1,000 µL	■ blue (for epT.I.P.S. <sup>®</sup> 1,000 µL)	100 µL	±3.0%	±3.0 µL	±0.6%	±0.6 µL	4924 000 088
		500 µL	±1.0%	±5.0 µL	±0.2%	±1.0 µL	
		1,000 µL	±0.6%	±6.0 µL	±0.2%	±2.0 µL	
0.25–2.5 mL	■ red (for epT.I.P.S. <sup>®</sup> 2.5 mL)	0.25 mL	±4.8%	±0.012 mL	±1.2%	±0.003 mL	4924 000 096
		1.25 mL	±0.8%	±0.010 mL	±0.2%	±0.0025 mL	
		2.5 mL	±0.6%	±0.015 mL	±0.2%	±0.005 mL	
0.5–5 mL	■ purple (for epT.I.P.S. <sup>®</sup> 5 mL)	0.5 mL	±2.4%	±0.012 mL	±0.6%	±0.003 mL	4924 000 100
		2.5 mL	±1.2%	±0.030 mL	±0.25%	±0.006 mL	
		5.0 mL	±0.6%	±0.030 mL	±0.15%	±0.0075 mL	
1–10 mL	■ turquoise (for epT.I.P.S. <sup>®</sup> 10 mL)	1.0 mL	±3.0%	±0.030 mL	±0.6%	±0.006 mL	4924 000 118
		5.0 mL	±0.8%	±0.040 mL	±0.2%	±0.010 mL	
		10.0 mL	±0.6%	±0.060 mL	±0.15%	±0.015 mL	

\*1 Eppendorf Reference<sup>®</sup> 2 single-channel variable volume pipettes up to 1,000 µL include an epT.I.P.S.<sup>®</sup> box. The 2.5 mL, 5 mL and 10 mL versions include an epT.I.P.S.<sup>®</sup> sample bag.

\*2 The error data, according to EN ISO 8655, only apply if original Eppendorf tips are used. Technical specifications are subject to change. Errors and omissions excepted.

### Accessories

**Tip-Tub reagent reservoir**, autoclavable reservoir for aspirating liquids with multi-channel pipettes,  
1 set = 10 reservoirs and 10 lids

### Order no.

0030 058 607

### Eppendorf TrackIT

3903 000 014

# Eppendorf Reference® 2

## Eppendorf Reference® 2, multi-channel, variable volume\*1

Volume range	Color code	Volume	Systematic error*2		Systematic error*2		For 96-well plates	
							Order no. 8-channel	Order no. 12-channel
0.5–10 µL	■ medium gray (for epT.I.P.S.® 20 µL)	0.5 µL	±12.0%	±0.06 µL	±8.0%	±0.04 µL	9 mm 4926 000 018	9 mm 4926 000 026
		1 µL	±8.0%	±0.08 µL	±5.0%	±0.05 µL		
		5 µL	±4.0%	±0.2 µL	±2.0%	±0.1 µL		
		10 µL	±2.0%	±0.2 µL	±1.0%	±0.1 µL		
10–100 µL	■ yellow (for epT.I.P.S.® 200 µL)	10 µL	±3.0%	±0.3 µL	±2.0%	±0.2 µL	4926 000 034	4926 000 042
		50 µL	±1.0%	±0.5 µL	±0.8%	±0.4 µL		
		100 µL	±0.8%	±0.8 µL	±0.3%	±0.3 µL		
30–300 µL	■ orange (for epT.I.P.S.® 300 µL)	30 µL	±3.0%	±0.9 µL	±1.0%	±0.3 µL	4926 000 050	4926 000 069
		150 µL	±1.0%	±1.5 µL	±0.5%	±0.75 µL		
		300 µL	±0.6%	±1.8 µL	±0.3%	±0.9 µL		

## Eppendorf Reference® 2, single-channel, fixed volume

Volume	Color code	Systematic error*2		Random error*2		Order no.
1 µL	■ dark gray (for epT.I.P.S.® 10 µL)	±2.5%	±0.025 µL	±1.8%	±0.018 µL	4925 000 014
2 µL		±2.0%	±0.04 µL	±1.2%	±0.024 µL	4925 000 022
5 µL	■ medium gray (for epT.I.P.S.® 20 µL)	±1.2%	±0.06 µL	±0.6%	±0.03 µL	4925 000 030
10 µL		±1.0%	±0.1 µL	±0.5%	±0.05 µL	4925 000 049
20 µL	■ light gray (for epT.I.P.S.® 20 µL L)	±0.8%	±0.16 µL	±0.3%	±0.06 µL	4925 000 065
10 µL		■ yellow (for epT.I.P.S.® 200 µL)	±1.2%	±0.12 µL	±0.6%	±0.06 µL
20 µL	±1.0%		±0.2 µL	±0.3%	±0.06 µL	4925 000 073
25 µL	±1.0%		±0.25 µL	±0.3%	±0.075 µL	4925 000 081
50 µL	±0.7%		±0.35 µL	±0.3%	±0.15 µL	4925 000 090
100 µL	■ blue (for epT.I.P.S.® 1,000 µL)	±0.6%	±0.6 µL	±0.2%	±0.2 µL	4925 000 103
200 µL		±0.6%	±1.2 µL	±0.2%	±0.4 µL	4925 000 111
200 µL		±0.6%	±1.2 µL	±0.2%	±0.4 µL	4925 000 120
250 µL		±0.6%	±1.5 µL	±0.2%	±0.5 µL	4925 000 138
500 µL		±0.6%	±3.0 µL	±0.2%	±1.0 µL	4925 000 146
1,000 µL		±0.6%	±6.0 µL	±0.2%	±2.0 µL	4925 000 154
2 mL	■ red (for epT.I.P.S.® 2.5 mL)	±0.6%	±0.012 mL	±0.2%	±0.004 mL	4925 000 162
2.5 mL		±0.6%	±0.015 mL	±0.2%	±0.005 mL	4925 000 170

\*1 All Eppendorf Reference® 2 multichannel variable volume pipettes include an epT.I.P.S.® box.

\*2 The error data, according to EN ISO 8655, only apply if original Eppendorf tips are used. Technical specifications are subject to change. Errors and omissions excepted.

## Eppendorf Reference® 2, 3-Pack, incl. epT.I.P.S.® Box and Eppendorf ballpoint pen

	Order no.
<b>Option 1:</b> 0.5–10 µL, 10–100 µL, 100–1,000 µL	4924 000 908
<b>Option 2:</b> 2–20 µL yellow, 20–200 µL, 100–1,000 µL	4924 000 916
<b>Option 3:</b> 100–1,000 µL, 0.5–5 mL, 1–10 mL	4924 000 924

# Eppendorf Xplorer®

Eppendorf Xplorer®, single-channel, variable volume, incl. charger

Volume range	Color code	Volume	Systematic error*		Random error*		Order no.
0.5–10 µL	■ dark gray (for epT.I.P.S.® 20 µL)	1 µL	±2.5 %	±0.025 µL	±1.8 %	±0.018 µL	4861 000 015
		5 µL	±1.5 %	±0.075 µL	±0.8 %	±0.04 µL	
		10 µL	±1.0 %	±0.1 µL	±0.4 %	±0.04 µL	
1–20 µL	■ light gray (for epT.I.P.S.® 20 µL)	2 µL	±5.0 %	±0.1 µL	±1.5 %	±0.03 µL	4861 000 017
		10 µL	±1.2 %	±0.12 µL	±0.6 %	±0.06 µL	
		20 µL	±1.0 %	±0.2 µL	±0.3 %	±0.06 µL	
5–100 µL	■ yellow (for epT.I.P.S.® 200 µL)	10 µL	±2.0 %	±0.2 µL	±1.0 %	±0.1 µL	4861 000 023
		50 µL	±1.0 %	±0.5 µL	±0.3 %	±0.15 µL	
		100 µL	±0.8 %	±0.8 µL	±0.2 %	±0.2 µL	
10–200 µL	■ yellow (for epT.I.P.S.® 200 µL)	20 µL	±2.5 %	±0.5 µL	±0.7 %	±0.14 µL	4861 000 027
		100 µL	±1.0 %	±1.0 µL	±0.3 %	±0.3 µL	
		200 µL	±0.6 %	±1.2 µL	±0.2 %	±0.4 µL	
15–300 µL	■ orange (for epT.I.P.S.® 300 µL)	30 µL	±2.5 %	±0.75 µL	±0.7 %	±0.21 µL	4861 000 031
		150 µL	±1.0 %	±1.5 µL	±0.3 %	±0.45 µL	
		300 µL	±0.6 %	±1.8 µL	±0.2 %	±0.6 µL	
50–1,000 µL	■ blue (for epT.I.P.S.® 1,000 µL)	100 µL	±3.0 %	±3 µL	±0.6 %	±0.6 µL	4861 000 040
		500 µL	±1.0 %	±5 µL	±0.2 %	±1 µL	
		1,000 µL	±0.6 %	±6 µL	±0.2 %	±2 µL	
0.125–2.5 mL	■ red (for epT.I.P.S.® 2.5 mL)	250 µL	±4.8 %	±12 µL	±1.2 %	±3.0 µL	4861 000 044
		1,250 µL	±0.8 %	±10 µL	±0.2 %	±2.5 µL	
		2,500 µL	±0.6 %	±15 µL	±0.2 %	±5.0 µL	
0.25–5 mL	■ purple (for epT.I.P.S.® 5 mL)	500 µL	±3.0 %	±15 µL	±0.6 %	±3 µL	4861 000 058
		2,500 µL	±1.2 %	±30 µL	±0.3 %	±6.25 µL	
		5,000 µL	±0.6 %	±30 µL	±0.15 %	±7.5 µL	
0.5–10 mL	■ turquoise (for epT.I.P.S.® 10 mL)	1,000 µL	±3.0 %	±30 µL	±0.6 %	±6 µL	4861 000 066
		5,000 µL	±0.8 %	±40 µL	±0.2 %	±10 µL	
		10,000 µL	±0.6 %	±60 µL	±0.15 %	±15 µL	

**Eppendorf Xplorer®**, multi-channel, variable volume, incl. charger

For 96-well plates

Volume range	Color code	Volume	Systematic error*		Random error*		Order no.	Order no.
							8-channel	12-channel
							Cone distance	
							9 mm	9 mm
0.5–10 µL	■ medium gray (for epT.I.P.S.® 20 µL)	1 µL	±5.0 %	±0.05 µL	±3.0 %	±0.03 µL	4861 000 104	4861 000 112
		5 µL	±3.0 %	±0.15 µL	±1.5 %	±0.075 µL		
		10 µL	±2.0 %	±0.2 µL	±0.8 %	±0.08 µL		
5–100 µL	■ yellow (for epT.I.P.S.® 200 µL)	10 µL	±2.0 %	±0.2 µL	±2.0 %	±0.2 µL	4861 000 120	4861 000 139
		50 µL	±1.0 %	±0.5 µL	±0.8 %	±0.4 µL		
		100 µL	±0.8 %	±0.8 µL	±0.25 %	±0.25 µL		
15–300 µL	■ orange (for epT.I.P.S.® 300 µL)	30 µL	±2.5 %	±0.75 µL	±1.0 %	±0.3 µL	4861 000 147	4861 000 155
		150 µL	±1.0 %	±1.5 µL	±0.5 %	±0.75 µL		
		300 µL	±0.6 %	±1.8 µL	±0.25 %	±0.75 µL		
50–1,200 µL	■ green (for epT.I.P.S.® 1,200 µL)	120 µL	±6.0 %	±7.2 µL	±0.9 %	±1.08 µL	4861 000 163	4861 000 171
		600 µL	±2.7 %	±16.2 µL	±0.4 %	±2.4 µL		
		1,200 µL	±1.2 %	±14.4 µL	±0.3 %	±3.6 µL		

\* The error data, according to EN ISO 8655, only apply if original Eppendorf tips are used. Technical specifications are subject to change. Errors and omissions excepted.

# Eppendorf Xplorer® plus

**Eppendorf Xplorer® plus**, single-channel, variable volume, incl. charger

Volume range	Color code	Volume	Systematic error*		Random error*		Order no.
0.5–10 µL	■ medium gray (for epT.I.P.S.® 20 µL)	1 µL	±2.5 %	±0.025 µL	±1.8 %	±0.018 µL	4861 000 708
		5 µL	±1.5 %	±0.075 µL	±0.8 %	±0.04 µL	
		10 µL	±1.0 %	±0.1 µL	±0.4 %	±0.04 µL	
1–20 µL	■ light gray (for epT.I.P.S.® 20 µL)	2 µL	±5.0 %	±0.1 µL	±1.5 %	±0.03 µL	4861 000 710
		10 µL	±1.2 %	±0.12 µL	±0.6 %	±0.06 µL	
		20 µL	±1.0 %	±0.2 µL	±0.3 %	±0.06 µL	
5–100 µL	■ yellow (for epT.I.P.S.® 200 µL)	10 µL	±2.0 %	±0.2 µL	±1.0 %	±0.1 µL	4861 000 716
		50 µL	±1.0 %	±0.5 µL	±0.3 %	±0.15 µL	
		100 µL	±0.8 %	±0.8 µL	±0.2 %	±0.2 µL	
10–200 µL	■ yellow (for epT.I.P.S.® 200 µL)	20 µL	±2.5 %	±0.5 µL	±0.7 %	±0.14 µL	4861 000 720
		100 µL	±1.0 %	±1.0 µL	±0.3 %	±0.3 µL	
		200 µL	±0.6 %	±1.2 µL	±0.2 %	±0.4 µL	
15–300 µL	■ orange (for epT.I.P.S.® 300 µL)	30 µL	±2.5 %	±0.75 µL	±0.7 %	±0.21 µL	4861 000 724
		150 µL	±1.0 %	±1.5 µL	±0.3 %	±0.45 µL	
		300 µL	±0.6 %	±1.8 µL	±0.2 %	±0.6 µL	
50–1,000 µL	■ blue (for epT.I.P.S.® 1,000 µL)	100 µL	±3.0 %	±3 µL	±0.6 %	±0.6 µL	4861 000 732
		500 µL	±1.0 %	±5 µL	±0.2 %	±1 µL	
		1,000 µL	±0.6 %	±6 µL	±0.2 %	±2 µL	
0.125–2.5 mL	■ red (for epT.I.P.S.® 2.5 mL)	250 µL	±4.8 %	±12 µL	±1.2 %	±3.0 µL	4861 000 736
		1,250 µL	±0.8 %	±10 µL	±0.2 %	±2.5 µL	
		2,500 µL	±0.6 %	±15 µL	±0.2 %	±5.0 µL	
0.25–5 mL	■ purple (for epT.I.P.S.® 5 mL)	500 µL	±3.0 %	±15 µL	±0.6 %	±3 µL	4861 000 740
		2,500 µL	±1.2 %	±30 µL	±0.3 %	±6.25 µL	
		5,000 µL	±0.6 %	±30 µL	±0.15 %	±7.5 µL	
0.5–10 mL	■ turquoise (for epT.I.P.S.® 10 mL)	1,000 µL	±3.0 %	±30 µL	±0.6 %	±6 µL	4861 000 759
		5,000 µL	±0.8 %	±40 µL	±0.2 %	±10 µL	
		10,000 µL	±0.6 %	±60 µL	±0.15 %	±15 µL	



**Eppendorf Xplorer® plus, 8/12-channel, variable volume, incl. charger**

Volume range	Color code	Volume	Systematic error*		Random error*		Order no.	Order no.
							8-channel	12-channel
							Cone distance	
							9 mm	9 mm
0.5–10 µL	■ medium gray (for epT.I.P.S.® 20 µL)	1 µL	±5.0 %	±0.05 µL	±3.0 %	±0.03 µL	4861 000 767	4861 000 775
		5 µL	±3.0 %	±0.15 µL	±1.5 %	±0.075 µL		
		10 µL	±2.0 %	±0.2 µL	±0.8 %	±0.08 µL		
5–100 µL	■ yellow (for epT.I.P.S.® 200 µL)	10 µL	±2.0 %	±0.2 µL	±2.0 %	±0.2 µL	4861 000 783	4861 000 791
		50 µL	±1.0 %	±0.5 µL	±0.8 %	±0.4 µL		
		100 µL	±0.8 %	±0.8 µL	±0.25 %	±0.25 µL		
15–300 µL	■ orange (for epT.I.P.S.® 300 µL)	30 µL	±2.5 %	±0.75 µL	±1.0 %	±0.3 µL	4861 000 805	4861 000 813
		150 µL	±1.0 %	±1.5 µL	±0.5 %	±0.75 µL		
		300 µL	±0.6 %	±1.8 µL	±0.25 %	±0.75 µL		
50–1,200 µL	■ green (for epT.I.P.S.® 1,200 µL)	120 µL	±6.0 %	±7.2 µL	±0.9 %	±1.08 µL	4861 000 821	4861 000 830
		600 µL	±2.7 %	±16.2 µL	±0.4 %	±2.4 µL		
		1,200 µL	±1.2 %	±14.4 µL	±0.3 %	±3.6 µL		

\* The error data, according to EN ISO 8655, only apply if original Eppendorf tips are used. Technical specifications are subject to change. Errors and omissions excepted.

**Eppendorf Xplorer® plus, 16-/24-channel, variable volume, incl. charger for 384-well plates**

Volume range	Channels	Color code	Volume	Systematic error*		Random error*		Order no.	Order no.
								16-channel	24-channel
							Cone distance		
							4.5 mm	4.5 mm	
1–20 µL	16	■ light pink (for epT.I.P.S.® 384 20 µL)	2 µL	±8.0 %	±0.16 µL	±5.0 %	±0.1 µL	4861 000 778	–
			10 µL	±4.0 %	±0.4 µL	±2.0 %	±0.2 µL		
			20 µL	±2.0 %	±0.4 µL	±1.0 %	±0.2 µL		
5–100 µL	16	■ light yellow (for epT.I.P.S.® 384 100 µL)	10 µL	±3.0 %	±0.3 µL	±2.0 %	±0.2 µL	4861 000 792	–
			50 µL	±1.2 %	±0.6 µL	±1.0 %	±0.4 µL		
			100 µL	±1.0 %	±1.0 µL	±0.6 %	±0.6 µL		
1–20 µL	24	■ light pink (for epT.I.P.S.® 384 20 µL)	2 µL	±8.0 %	±0.16 µL	±5.0 %	±0.1 µL	–	4861 000 779
			10 µL	±4.0 %	±0.4 µL	±2.0 %	±0.2 µL		
			20 µL	±2.0 %	±0.4 µL	±1.0 %	±0.2 µL		
5–100 µL	24	■ light yellow (for epT.I.P.S.® 384 100 µL)	10 µL	±3.0 %	±0.3 µL	±2.0 %	±0.2 µL	–	4861 000 793
			50 µL	±1.2 %	±0.6 µL	±0.8 %	±0.4 µL		
			100 µL	±1.0 %	±1.0 µL	±0.6 %	±0.6 µL		

\* The error data, according to EN ISO 8655, only apply if original Eppendorf tips are used. Technical specifications are subject to change. Errors and omissions excepted.

# VisioNize® pipette manager

Description	Order no.
<b>VisioNize® pipette manager</b> , an external touch server enabling communication with connected electronic pipettes	1004 000 001
<b>Eppendorf Xplorer® connect</b> , WiFi module incl. battery for Eppendorf Xplorer	4861 000 970

**Note:** The VisioNize pipette manager is not available worldwide. Please contact your Eppendorf Sales Representative for more information.

# Eppendorf Move It®

**Eppendorf Research® plus Move It®**,  
mechanical, multi-channel, variable volume










No. of channels	Volume	Color code	Order no.
4-channel	30–300 µL	orange	3125 000 150
	120–1,200 µL	dark green	3125 000 184
6-channel	30–300 µL	orange	3125 000 168
	120–1,200 µL	dark green	3125 000 192
8-channel	1–20 µL	light pink	3125 000 117
	5–100 µL	light yellow	3125 000 133
	30–300 µL	orange	3125 000 176
	120–1,200 µL	dark green	3125 000 206
12-channel	1–20 µL	light pink	3125 000 125
	5–100 µL	light yellow	3125 000 141

**Eppendorf Xplorer® plus Move It®**,  
electronic, multi-channel, variable volume, incl. charger

No. of channels	Volume	Color code	Order no.
4-channel	15–300 µL	orange	4861 000 816
	50–1,200 µL	green	4861 000 833
6-channel	15–300 µL	orange	4861 000 817
	50–1,200 µL	green	4861 000 834
8-channel	1–20 µL	light pink	4861 000 781
	5–100 µL	light yellow	4861 000 794
	15–300 µL	orange	4861 000 818
	50–1,200 µL	green	4861 000 835
12-channel	1–20 µL	light pink	4861 000 782
	5–100 µL	light yellow	4861 000 795

All models available as  
electronic Xplorer plus and  
mechanical Research plus.



Vessel Format	Type of tips	epT.I.P.S. <sup>®</sup>			epT.I.P.S. <sup>®</sup> 384	
	Pipette Electronic Mechanical	Eppendorf Xplorer <sup>®</sup> plus, Eppendorf Research <sup>®</sup> plus			Eppendorf Xplorer <sup>®</sup> plus, Eppendorf Research <sup>®</sup> plus	
	No. of channels	4	6	8	8	12
	Volume (µL)	300 / 1,200	300 / 1,200	300 / 1,200	20 / 100	20 / 100
	Tip distance (mm)	9–33	9–20	9–14	4.5–14	4.5–9
	<b>384 Wells</b> (Tip distance 4.5 mm)	–	–	–	■	■
	<b>96 Wells</b> (Tip distance 9 mm)	■	■	■	■	■
	<b>48 Wells</b> (Tip distance 13 mm)	■	■	■	■	–
	<b>24 Wells</b> (Tip distance 19 mm)	■	■	–	–	–
	<b>12 Wells</b> (Tip distance 26 mm)	■	–	–	–	–
	<b>1.5 / 2.0 / 5.0 mL Tube</b> (Tip distance min. – max.: 9 mm – 33 mm)	■	–	–	–	–
	<b>1.5 / 2.0 / 5.0 mL Tube</b> (Tip distance min. – max.: 9 mm – 20 mm)	–	■	–	–	–
	<b>1.5 / 2.0 / 5.0 mL Tube</b> (Tip distance min. – max.: 9 mm – 14 mm 4.5 mm – 14 mm)	–	–	■	■	–
	<b>Agarose gel</b>	■*	■*	■*	■	■

\* Limited suitability due to volume and size of tips

# Easypet® 3

Description	Order no.
<b>Easypet® 3</b> , incl. power supply and Lithium-polymer rechargeable battery, wall mount, shelf stand, and two membrane filters (unsterile) 0.45 µm	4430 000 018
<b>Membrane filter</b> , sterile, 0.45 µm, set of 5	4421 601 009
<b>Membrane filter</b> , sterile, 0.2 µm, pack of 5	4430 606 005
<b>Lithium-polymer rechargeable battery</b> for Easypet® 3	4430 605 009
<b>Pipette Holder</b> , for one Eppendorf Easypet® 3, for wall mounting, sticky tape included	4430 604 002

# Eppendorf Pipette Holder System

Description	Order No.
<b>Pipette Carousel 2</b> , for 6 Eppendorf Research®, Eppendorf Research® plus, Eppendorf Reference®, Eppendorf Reference® 2 or Biomaster®, additional pipette holders are optionally available	3116 000 015
<b>Charger Carousel 2</b> , for 6 Eppendorf Xplorer® or Eppendorf Xplorer® plus, mains/power adapter included, additional charger shells and pipette holders are optionally available	3116 000 023
<b>Charger Stand 2</b> , for one Eppendorf Xplorer® or Eppendorf Xplorer® plus, operated with mains/power adapter supplied with Eppendorf Xplorer® or Eppendorf Xplorer® plus	3116 000 031
<b>Charger Stand 2</b> , for one Eppendorf Multipipette® E3/E3x or Multipipette® stream/Xstream, operated with mains/power adapter supplied with Eppendorf Multipipette® E3/E3x or Multipipette® stream/Xstream	3116 000 040
<b>Pipette Stand 2</b> , for one Eppendorf Multipipette® M4, without charging functionality, additional pipette holders are optionally available	3116 000 058
<b>Pipette Holder 2</b> , for one Eppendorf Research®, Eppendorf Research® plus, Eppendorf Reference®, Eppendorf Reference® 2 or Biomaster®, for Pipette Carousel 2 and Charger Carousel 2 or wall mounting, sticky tape included	3116 000 112
<b>Pipette Holder 2</b> , for one Eppendorf Xplorer® or Eppendorf Xplorer® plus, for Pipette Carousel 2 or wall mounting, sticky tape included, without charging functionality	3116 000 120
<b>Pipette Holder 2</b> , for one Eppendorf Multipipette® E3/E3x or Multipipette® stream/Xstream, for Pipette Carousel 2 or wall mounting, sticky tape included, without charging functionality	3116 000 139
<b>Pipette Holder 2</b> , for one Eppendorf Multipipette® M4, for Pipette Carousel 2 and Charger Carousel 2 or wall mounting, sticky tape included, without charging functionality	3116 000 147
<b>Charger Shell 2</b> , for one Eppendorf Xplorer® or Eppendorf Xplorer® plus, for Charger Carousel 2, with charging functionality	3116 602 007
<b>Charger Shell 2</b> , for one Eppendorf Multipipette® E3/E3x or Multipipette® stream/Xstream, for Charger Carousel 2, with charging functionality	3116 603 003

## Pipet Helper®

Description	Order no.
<b>Pipet Helper®</b> , 0.1–100 mL	4423 000 010
<b>Membrane filter</b> , for Pipet Helper®, 3 µm, not sterile, (pack of 10)	4423 601 014

## Multipette® M4

Description	Order no.
<b>Multipette® M4</b> incl. holder (for wall and/or pipette carousel)	4982 000 012
<b>Multipette® M4 Starter Kit</b> , Multipette® M4, incl. holder Combitip Rack, Combitip assortment pack	4982 000 314

## Multipette® E3/E3x

Description	Order no.
<b>Multipette® E3</b> with charging adapter and 2 Combitips advanced® assortment pack	4987 000 010
<b>Multipette® E3</b> with charger stand, 2 Combitips advanced® assortment pack, and charging stand	4987 000 371
<b>Multipette® E3x</b> with charging adapter and 2 Combitips advanced® assortment pack	4987 000 029
<b>Multipette® E3x</b> with charger stand, 2 Combitips advanced® assortment pack, and charging stand	4987 000 380

# Combitips advanced®

Volume	Color code	Order no. Eppendorf Quality box of 100 pcs. (4 bags x 25 pcs.)	Order no. PCR clean* <sup>1</sup> box of 100 pcs., 4 bags (zip-lock) x 25 pcs.	Order no. Eppendorf Biopur®* <sup>2</sup> box of 100 pcs. (individually wrapped)	Order no. Forensic DNA Grade box of 100 pcs. (individually wrapped)
0.1 mL	□ White	0030 089 405	0030 089 766	0030 089 618	–
0.2 mL	■ Light blue	0030 089 413	0030 089 774	0030 089 626	–
0.5 mL	■ Purple	0030 089 421	0030 089 782	0030 089 634	–
1 mL	■ Yellow	0030 089 430	0030 089 790	0030 089 642	0030 089 855
2.5 mL	■ Green	0030 089 448	0030 089 804	0030 089 650	0030 089 863
5 mL	■ Blue	0030 089 456	0030 089 812	0030 089 669	0030 089 871
10 mL	■ Orange	0030 089 464	0030 089 820	0030 089 677	–
25 mL* <sup>3</sup>	■ Red	0030 089 472	0030 089 839	0030 089 685	–
50 mL* <sup>3</sup>	■ Light gray	0030 089 480	0030 089 847	0030 089 693	–
<b>ViscoTip®</b>					
10 mL	■ Orange	0030 089 936	–	–	–
<b>Accessories</b>					
25 mL adapter (1 pc.)	■ Red	0030 089 715			
25 mL adapter (7 pcs.)	■ Red			0030 089 731	
50 mL adapter (1 pc.)	■ Light gray	0030 089 723			
50 mL adapter (7 pcs.)	■ Light gray			0030 089 740	
Combitip Rack (for 8 Combitips advanced®, 0.1 mL–10 mL)		0030 089 758			
Combitips advanced® Assortment pack (1 Combitip of each size, incl. adapters)		0030 089 936			

\*<sup>1</sup> PCR clean: batch tested and certified to be free of: human DNA, DNase, RNase, PCR inhibitors\*<sup>2</sup> Eppendorf Biopur®: batch tested and certified to be sterile and free of: human and bacterial DNA, DNase, RNase, PCR inhibitors, ATP, pyrogen\*<sup>3</sup> 4 boxes of 25 pcs. each. Each box contains an adapter.



## Varipette® 4720

Description	Order no.
<b>Eppendorf Varipette® 4720</b> , with continuous volume selection in the 1–10 mL range	4720 000 011
<b>Eppendorf Varitips® S Starter Kit</b> , consisting of 100 Maxitips, 10 dispensing parts, 10 valves	0030 050 525
<b>Eppendorf Varitips® P</b> , to remove liquid from smaller vessels, 100 pieces	0030 048 130
<b>Eppendorf Varitips® S dispensing part</b> , 30 pieces	0030 050 533
<b>Eppendorf Varitips® S</b> , graduated, 200 pieces	0030 050 568
<b>Eppendorf Varitips® S valve</b> , 100 pieces	0030 050 541

## Varispenser® 2/2x

Volume	Thread	Thread adapter incl.	Order no.
<b>Varispenser® 2</b>			
0.2–2 mL	GL 45	GL 25, GL 28/ S 28, GL 32, GL 38, S 40	4966 000 010
0.5–5 mL	GL 45	GL 25, GL 28/ S 28, GL 32, GL 38, S 40	4966 000 029
1–10 mL	GL 45	GL 25, GL 28/ S 28, GL 32, GL 38, S 40	4966 000 037
2.5–25 mL	GL 45	GL 32, GL 38, S 40	4966 000 045
5–50 mL	GL 45	GL 32, GL 38, S 40	4966 000 053
10–100 mL	GL 45	GL 32, GL 38, S 40	4966 000 061
<b>Varispenser® 2x</b>			
0.2–2 mL	GL 45	GL 25, GL 28/ S 28, GL 32, GL 38, S 40	4967 000 014
0.5–5 mL	GL 45	GL 25, GL 28/ S 28, GL 32, GL 38, S 40	4967 000 022
1–10 mL	GL 45	GL 25, GL 28/ S 28, GL 32, GL 38, S 40	4967 000 030
2.5–25 mL	GL 45	GL 32, GL 38, S 40	4967 000 049
5–50 mL	GL 45	GL 32, GL 38, S 40	4967 000 057
10–100 mL	GL 45	GL 32, GL 38, S 40	4967 000 065

## Eppendorf Top Buret™

Description	Volume	With three adapters for outer diameter (mm)	Order no.
<b>Eppendorf Top Buret™ M</b>	2.5 mL per rotation	32, 38, 40	4965 000 017
<b>Eppendorf Top Buret™ H</b>	5.0 mL per rotation	32, 38, 40	4965 000 025
<b>Dry tube</b>			4960 851 000

# epMotion®

Description	Order no.
<b>epMotion® 96</b> , semi-automated electronic pipette for parallel 96 channel microplate processing (without iPod® controller), 100–240 V ±10 %/50–60 Hz ±5 %, 0.5–300 µL	5069 000 112
<b>epMotion® 96, with 2-position slider</b> , semi-automated electronic pipette for parallel 96 channel microplate processing (without iPod® controller), 100–240 V ±10 %/50–60 Hz ±5 %, 0.5–300 µL	5069 000 110
<b>epMotion® 96xl</b> , semi-automated electronic pipette for parallel 96 channel microplate processing (without iPod® controller), 5–1,000 µL	5069 000 217
<b>epMotion® 96xl, with 2-position slider</b> , semi-automated electronic pipette for parallel 96 channel microplate processing (without iPod® controller), 5–1,000 µL	5069 000 314
<b>epMotion® 5070 EasyCon</b> , completely contained housing, system incl. Eppendorf EasyCon, epBlue™ software and LH assistant, mouse, waste box, 100–240 V ±10 %/50–60 Hz ±5 %, 0.2 µL–1 mL	5070 006 032
<b>epMotion® 5070 MultiCon</b> , completely contained housing, system incl. Eppendorf MultiCon, epBlue™ software and LH assistant, keyboard, mouse, waste box, 100–240 V ±10 %/50–60 Hz ±5 %, 0.2 µL–1 mL	5070 000 282
<b>epMotion® 5073l EasyCon</b> , completely contained housing system incl. Eppendorf EasyCon, epBlue™ software and LH assistant, mouse, waste box, 100–240 V ±10 %/50–60 Hz ±5 %, 0.2 µL–1 mL	5073 000 582
<b>epMotion® 5073l MultiCon</b> , completely contained housing system incl. Eppendorf MultiCon, epBlue™ software and LH assistant, keyboard, mouse, waste box, 100–240 V ±10 %/50–60 Hz ±5 %, 0.2 µL–1 mL	5073 000 590
<b>epMotion® 5073lc EasyCon</b> , CleanCap, system incl. Eppendorf EasyCon, epBlue™ software and LH assistant, mouse, waste box, 100–240 V ±10 %/50–60 Hz ±5 %, 0.2 µL–1 mL	5073 000 604
<b>epMotion® 5073lc MultiCon</b> , CleanCap, system incl. Eppendorf MultiCon, epBlue™ software and LH assistant, keyboard, mouse, waste box, 100–240 V ±10 %/50–60 Hz ±5 %, 0.2 µL–1 mL	5073 000 612
<b>epMotion® 5073m EasyCon</b> , completely contained housing, system incl. Eppendorf EasyCon, MagSep module, Eppendorf ThermoMixer®, epBlue™ software and Prep assistant, mouse, waste box, 100–240 V ±10 %/50–60 Hz ±5 %, 0.2 µL–1 mL	5073 000 787
<b>epMotion® 5073m MultiCon</b> , completely contained housing, system incl. Eppendorf MultiCon, MagSep module, Eppendorf ThermoMixer®, epBlue™ software and Prep assistant, keyboard, mouse, waste box, 100–240 V ±10 %/50–60 Hz ±5 %, 0.2 µL–1 mL	5073 000 795
<b>epMotion® 5073m EasyCon NGS solution</b> , includes EasyCon and integrated ThermoMixer, Enhanced feature set 1 software upgrade, dispensing tools (TS 50, TS 300, TM 300-8), NGS specific accessories, NGS specific consumables, 100–240 V ±10 %/50–60 Hz ±5 %, 0.2 µL–1 mL	5073000930
<b>epMotion® 5073m MultiCon NGS solution</b> , includes EasyCon and integrated ThermoMixer, Enhanced feature set 1 software upgrade, dispensing tools (TS 50, TS 300, TM 300-8), NGS specific accessories, NGS specific consumables, 100–240 V ±10 %/50–60 Hz ±5 %, 0.2 µL–1 mL	5073000949
<b>epMotion® 5073mc EasyCon</b> , CleanCap, system incl. Eppendorf EasyCon, MagSep module, Eppendorf ThermoMixer®, CleanCap, epBlue™ software and Prep assistant, mouse, waste box, 100–240 V ±10 %/50–60 Hz ±5 %, 0.2 µL–1 mL	5073 000 809
<b>epMotion® 5073mc MultiCon</b> , CleanCap, system incl. Eppendorf MultiCon, MagSep module, Eppendorf ThermoMixer®, CleanCap, epBlue™ software and Prep assistant, keyboard, mouse, waste box, 100–240 V ±10 %/50–60 Hz ±5 %, 0.2 µL–1 mL	5073 000 817
<b>epMotion® 5073mc EasyCon NGS solution</b> , includes EasyCon and integrated ThermoMixer with CleanCap, Enhanced feature set 1 software upgrade, dispensing tools (TS 50, TS 300, TM 300-8), NGS specific accessories, NGS specific consumables, 100–240 V ±10 %/50–60 Hz ±5 %, 0.2 µL–1 mL	5073000957
<b>epMotion® 5073mc MultiCon NGS solution</b> , includes EasyCon and integrated ThermoMixer with CleanCap, Enhanced feature set 1 software upgrade, dispensing tools (TS 50, TS 300, TM 300-8), NGS specific accessories, NGS specific consumables, 100–240 V ±10 %/50–60 Hz ±5 %, 0.2 µL–1 mL	5073000965
<b>epMotion® 5075l</b> , basic device incl. epBlue™ software, mouse, waste box, 100–240 V ±10 %/50–60 Hz ±5 %, 0.2 µL–1 mL	5075 000 301
<b>epMotion® 5075l with CleanCap</b> , 100–240 V ±10 %/50–60 Hz ±5 %, incl. MultiCon all-in-one PC, epBlue™ software, LH Assistant, keyboard, mouse and waste box	on request
<b>epMotion® 5075v</b> , basic device incl. vacuum system, gripper, vac frame 2, vac frame holder, epBlue™ software, mouse, waste box, 100–240 V ±10 %/50–60 Hz ±5 %, 0.2 µL–1 mL	5075 000 303
<b>epMotion® 5075v with CleanCap</b> , with integrated vacuum system, 100–240 V ±10 %/50–60 Hz ±5 %, incl. MultiCon all-in-one PC, epBlue™ software, keyboard, mouse, gripper, Vac Frame 2, Vac Frame holder and waste box	on request

Description	Order no.
<b>epMotion® 5075t</b> , basic device incl. Eppendorf ThermoMixer®, epBlue™ software, mouse, waste box, 100–240 V ±10 %/50–60 Hz ±5 %, 0.2 µL–1 mL	5075 000 302
<b>epMotion® 5075t with CleanCap</b> , with integrated ThermoMixer, 100–240 V ±10 %/50–60 Hz ±5 %, incl. MultiCon all-in-one PC, epBlue™ software, keyboard, mouse and waste box	on request
<b>epMotion® 5075t NGS solution</b> , package with completely contained housing, MultiCon PC, Enhanced feature set 1, C2 thermal module, dispensing tools, plus NGS specific accessories, plus NGS specific consumables to start automated library preparation, 100–240 V ±10 %/50–60 Hz ±5 %	5075000962
<b>epMotion® 5075tc NGS solution</b> , package with CleanCap, MultiCon PC, Enhanced feature set 1, C2 thermal module, dispensing tools, plus NGS specific accessories, plus NGS specific consumables to start automated library preparation, 100–240 V ±10 %/50–60 Hz ±5 %	5075000963
<b>epMotion® 5075vt</b> , basic device incl. vacuum system, gripper, vac frame 2, vac frame holder, Eppendorf ThermoMixer®, epBlue™ software, mouse, waste box, 100–240 V ±10 %/50–60 Hz ±5 %, 0.2 µL–1 mL	5075 000 304
<b>epMotion® 5075vt with CleanCap</b> , with integrated vacuum system and ThermoMixer, 100–240 V ±10 %/50–60 Hz ±5 %, incl. MultiCon all-in-one PC, epBlue software, keyboard, mouse, gripper, Vac Frame 2, Vac Frame holder and waste box	on request
<b>epMotion® 5075m</b> , basic device incl. Eppendorf MagSep™ module, Eppendorf ThermoMixer®, epBlue™ software, mouse, waste box, 100–240 V ±10 %/50–60 Hz ±5 %, 0.2 µL–1 mL	5075 000 305
<b>epMotion® 5075m with CleanCap</b> , with integrated ThermoMixer and MagSep module, 100–240 V ±10 %/50–60 Hz ±5 %, incl. MultiCon all-in-one PC, epBlue™ software, PREP Assistant, PCR Assistant, keyboard, mouse and waste box	on request

000 «Диаэм»

Москва

ул. Магаданская, д. 7, к. 3 ■ тел./факс: (495) 745-0508 ■ sales@dia-m.ru

www.dia-m.ru

С.-Петербург

+7 (812) 372-6040  
spb@dia-m.ru

Новосибирск

+7 (383) 328-0048  
nsk@dia-m.ru

Воронеж

+7 (473) 232-4412  
vrn@dia-m.ru

Йошкар-Ола

+7 (927) 880-3676  
nba@dia-m.ru

Красноярск

+7 (923) 303-0152  
krsk@dia-m.ru

Казань

+7 (843) 210-2080  
kazan@dia-m.ru

Ростов-на-Дону

+7 (863) 303-5500  
rnd@dia-m.ru

Екатеринбург

+7 (912) 658-7606  
ekb@dia-m.ru

Кемерово

+7 (923) 158-6753  
kemerovo@dia-m.ru

Армения

+7 (094) 01-0173  
armenia@dia-m.ru