
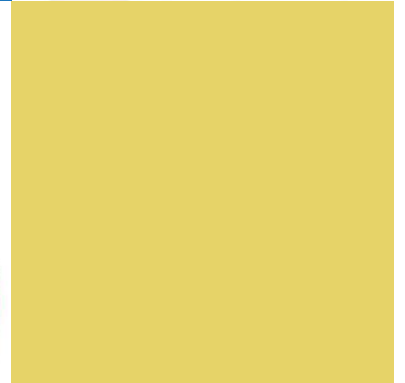


CATALOG 2020-2021

SOLUTIONS FOR CHROMATOGRAPHY



 **ALWSCI**[®]
Technologies

 阿尔赛斯



ABOUT US

ALWSCI Group

As a global supplier of Chromatography Vials, Closures, Septa and Syringe Filters, ALWSCI devote analytical test and laboratory consumables to provide high quality, efficient service and favorable price.

As an ISO 9001:2015 certified company, ALWSCI have set up high quality standards for ourselves and took fully responsible for all clients.

Besides, ALWSCI own 10,000 SQM factory area with 5,000 SQM 100,000 grade cleaning room. To keep stable quality, improve productivity, and avoid any contamination from human interference, ALWSCI have invested more than 10 automatic production lines presently.

To offer a better solution of sample preparation, full production line is available, including a series of sample vials from 1ML to 1,000ML, Septa from 4mm to 55mm diameter, and Syringe filters made of various membrane.

We would like to draw your attention to Ultra-Clean Septa and EPA Quality Vial KIT. These high quality consumables are mostly used for LC/MS, GC/MS and MS/MS in the environmental, chemical, food and pharmaceutical industries.

We have customers from pharmaceutical, life science, chemistry, technology, food processing industry and so on. Others like University, research institution, government institution, environment test institution, etc.

ALWSCI Group has two famous brands, ALWSCI and Labfil.

☞ ALWSCI focus on Chromatography Vial, Closures and Sample Storage Vial.

☞ Labfil focus on Filtration, including Membrane, and Syringe Filters (sterile and non-sterile).



Main products:

**Analysis: Autosampler Vials & Closures.
Storage: Sample Vials & Closures.**



Main products:

Filtration: Membrane, Syringe Filters, and etc.

Further products are available upon request!

Hopefully you will find the introduction of our company not only informative, but also interesting.

☞ We would like to thank you for taking the time to visit our website.

☞ www.alwsci.com

☞ www.labfil.com

Zhejiang ALWSCI Technologies Co.,Ltd.

CERTIFICATE

ALWSCI Group

sira
CERTIFICATION

QUALITY MANAGEMENT SYSTEM CERTIFICATE

This is to Certify that the QUALITY MANAGEMENT SYSTEM of
ZHEJIANG ALWSCI TECHNOLOGIES CO., LTD.

Registered Address: No.16 Workshop, Yuexing Science and Technology Park, No. 11 FanRongRoad, Shaoying Binhai New Town, Zhejiang Province, China

Audit Address: No.16 Workshop, Yuexing Science and Technology Park, No. 11 FanRongRoad, Shaoying Binhai New Town, Zhejiang Province, China

has been assessed by Sira Certification Service and found to comply with

GB/T19001-2016 idt ISO9001:2015
for the

Production and sales of Teflon silicone gaskets and laboratory high-performance consumables (glass bottles, plastic caps, syringe filter)

Certificate Number: 180202
Unified Social Credit Code: 91330600740342970
Initial Certification: 05 May 2015
Issue/Release Date: 10 Feb. 2019
Certificate Expiry: 19 Mar. 2020

IAF

Reaccreditation Date: 18 Jun. 2021

Customer: If the certified organization involves a temporary location, please refer to the temporary location listed in the audit report. The temporary location which is not listed in the audit report will not be within the scope of certification.

This certificate is subject to the company maintaining its system to the required standards, which will be monitored by Sira. The use of this Certificate and the Sira Certification Mark are subject to the Regulations Applicable to Holders of Sira Certificates. The certificate is issued by Sira Certification Co., Ltd. Its validity is dependent on a review of the OHSAS 18001 system. See www.sira.com.cn

Sira Certification Service

The certificate is the property of Sira and shall be returned when requested. It may only be reproduced in its entirety and without change. Use of the Certificate without the permission of Sira Certification Service is prohibited. Contact: cert@sigmase.com.cn or Building 26, No. 2777 East Anson Road, Shanghai, China

sira
CERTIFICATION

质量管理体系认证证书

兹证明

浙江欧尔赛斯科技有限公司

注册地址：中国浙江省绍兴滨海新区棠棠路11号越兴科技园内16#厂房

审核地址：中国浙江省绍兴滨海新区棠棠路11号越兴科技园内16#厂房

其质量管理体系已通过 Sira Certification Service 的评审，符合

GB/T19001-2016 idt ISO9001:2015 标准
认证范围

特氟龙硅胶垫片的生产及销售
实验室高性能耗材（玻璃瓶、塑料盖、过滤器）的生产及销售。

认证证书编号: 180202
统一社会信用代码: 91330600740342970
首次发证日期: 2015年05月05日
颁发日期: 2019年02月10日
本证书有效期至: 2020年03月19日

IAF

注册编号: 2021.01.18

顾客须知: 若获证组织涉及临时场所, 请参照报告中所列临时场所填写。未在报告中列出的临时场所不在认证范围内。

本证书的有效性依赖于获证组织保持质量管理体系符合认证标准的要求。本证书的有效性将由 Sira 进行监督审核。本证书的有效性依赖于获证组织保持质量管理体系符合认证标准的要求。本证书的有效性将由 Sira 进行监督审核。

Sira Certification Service

The certificate is the property of Sira and shall be returned when requested. It may only be reproduced in its entirety and without change. Use of the Certificate without the permission of Sira Certification Service is prohibited. Contact: cert@sigmase.com.cn or Building 26, No. 2777 East Anson Road, Shanghai, China

SGS

Test Report No. SHACC1818359203 Date: 17 Aug 2018 Page 1 of 6

ZHEJIANG ALWSCI TECHNOLOGIES CO., LTD
No. 16 Workshop, Yuexing Science and Technology Park, No.11 FanRongRoad, Shaoying Binhai New Town, Zhejiang Province, China

The following sample(s) was/were submitted and identified on behalf of the clients as: PTFE/Gasket

SGS Job No.: SP18-028915 - SH
Date of Sample Received: 14 Aug 2018
Testing Period: 14 Aug 2018 - 17 Aug 2018
Test Requested: Selected (see) as requested by client
Test Method: Please refer to next page(s)
Test Results: Please refer to next page(s)
Conclusion: Based on the performed tests on submitted sample(s), the results of Lead, Mercury, Hexavalent chromium, Polychlorinated biphenyls (PCBs), Polycyclic aromatic hydrocarbons (PAHs) and Phthalates such as: Bis(2-ethylhexyl) phthalate (DEHP), Butyl terephthalate (BBP), Di phthalate (DEP) and Diisobutyl phthalate (DIBP) comply with the limit values of the RoHS Directive (EU) 2015/863 amending Annex II to Directive 2011/65/EU.

Signed for and on behalf of SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd.

Dora Hu
Approved Signatory

SGS

SGS

Test Report No. SHACC1818359201 Date: 12 Aug 2018

ZHEJIANG ALWSCI TECHNOLOGIES CO., LTD
No. 16 Workshop, Yuexing Science and Technology Park, No.11 FanRongRoad, Shaoying Binhai New Town, Zhejiang Province, China

The following sample(s) was/were submitted and identified on behalf of the clients as: Plastic Cup

SGS Job No.: SP18-028915 - SH
Date of Sample Received: 14 Aug 2018
Testing Period: 14 Aug 2018 - 17 Aug 2018
Test Requested: Selected (see) as requested by client
Test Method: Please refer to next page(s)
Test Results: Please refer to next page(s)
Conclusion: Based on the performed tests on submitted sample(s), the results of Lead, Mercury, Hexavalent chromium, Polychlorinated biphenyls (PCBs), Polycyclic aromatic hydrocarbons (PAHs) and Phthalates such as: Bis(2-ethylhexyl) phthalate (DEHP), Butyl terephthalate (BBP), Di phthalate (DEP) and Diisobutyl phthalate (DIBP) comply with the limit values of the RoHS Directive (EU) 2015/863 amending Annex II to Directive 2011/65/EU.

Signed for and on behalf of SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd.

Dora Hu
Approved Signatory

SGS

SGS

Test Report No. SHACC1818359202 Date: 17 Aug 2018 Page 1 of 6

ZHEJIANG ALWSCI TECHNOLOGIES CO., LTD
No. 16 Workshop, Yuexing Science and Technology Park, No.11 FanRongRoad, Shaoying Binhai New Town, Zhejiang Province, China

The following sample(s) was/were submitted and identified on behalf of the clients as: Chromatography Autosampler Vial

SGS Job No.: SP18-028915 - SH
Date of Sample Received: 14 Aug 2018
Testing Period: 14 Aug 2018 - 17 Aug 2018
Test Requested: Selected (see) as requested by client
Test Method: Please refer to next page(s)
Test Results: Please refer to next page(s)
Conclusion: Based on the performed tests on submitted sample(s), the results of Lead, Mercury, Hexavalent chromium, Polychlorinated biphenyls (PCBs), Polycyclic aromatic hydrocarbons (PAHs) and Phthalates such as: Bis(2-ethylhexyl) phthalate (DEHP), Butyl terephthalate (BBP), Di phthalate (DEP) and Diisobutyl phthalate (DIBP) comply with the limit values of the RoHS Directive (EU) 2015/863 amending Annex II to Directive 2011/65/EU.

Signed for and on behalf of SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd.

Dora Hu
Approved Signatory

SGS

FACTORY APPEARANCE

**ALWSCI
Technologies.**



PRODUCT CONTENTS

ALWSCI®

Hot Products ————— 02

- ☞ UltraVial ————— 03-04
- ☞ EPA/TOC Vials & Closures ————— 05
- ☞ Bonded ————— 06

ALWSCI®

Autosampler Vials & Closures ————— 07

- ☞ Screw Neck ND8 ————— 08
- ☞ 5mm Micro Insert ————— 08
- ☞ Short Thread ND9 ————— 09-10
- ☞ 6mm Micro Insert ————— 10
- ☞ Crimp Neck ND11 ————— 11
- ☞ Snap Neck ND11 ————— 12
- ☞ Short Thread ND13 ————— 13
- ☞ Shell Vial ————— 14
- ☞ Test Tube ————— 14
- ☞ High Recovery Vial ————— 14
- ☞ Screw Neck ND10 ————— 14

ALWSCI®

Headspace Vials & Closures ————— 15

- ☞ Screw Headspace ND18 ————— 16
- ☞ Crimp Headspace ND20 ————— 17-18
- ☞ 20mm Butyl Septa ————— 18
- ☞ Customized Service ————— 19

ALWSCI®

Sample Vials & Closures ————— 20

- ☞ Sample Vials & Closures ————— 21-22
- ☞ 24-400 Closures With Sample Vial ————— 23
- ☞ Sample Vial Kit Package ————— 24
- ☞ Narrow Mouth Bottle ————— 25-26
- ☞ Wide Mouth Bottle ————— 27-28

ALWSCI®

Tools ————— 29

- ☞ Vial Rack ————— 30
- ☞ Crimper & Decrimper ————— 30
- ☞ Safety Caps Thread GL45 ————— 31
- ☞ GC Septa ————— 31

Labfil®

Welded Syringe Filter ————— 32

- ☞ Nylon ————— 35
- ☞ PES ————— 36
- ☞ PTFE ————— 37-38
- ☞ PVDF ————— 39-40
- ☞ CA ————— 41
- ☞ RC ————— 42

Labfil®

Economy Syringe Filter ————— 43

- ☞ Nylon ————— 45
- ☞ PES ————— 46
- ☞ PTFE ————— 47-48
- ☞ PVDF ————— 49-50
- ☞ MCE ————— 51

Labfil®

Sterile Syringe Filter ————— 52

- ☞ Nylon ————— 53
- ☞ PTFE ————— 53
- ☞ PES ————— 54
- ☞ PVDF ————— 54

Labfil®

Membrane Filter ————— 55

- ☞ 47MM Sterile MCE Grid Membrane ————— 56
- ☞ Membrane Filter ————— 56
- ☞ CA / MCE / Nylon / PES / PVDF / PTFE ————— 57
- ☞ Chemical Compatibility ————— 58

ALWSCI Main products:

Analysis:
Autosampler Vials & Closures.

Storage:
Sample Vials & Closures.

Selection Guide

- Proper septa selection is critical to prevent contamination and avoid damage to the needle and instrument.
- The right choice of septa depends on the application.
- For highly sensitive samples, we recommend PTFE-lined Silicone septa, because the PTFE layer is good at chemically resistant.
- Besides, septa made of different materials are with different safety temperature resistance.

► Septa Selection Guide

Materials	Safety Temperature
PTFE/Silicone	180°C
PTFE/Silicone/PTFE	200°C
Red Rubber/PTFE	-40°C to 110°C
Natural Rubber/TEF Butyl/PTFE	-40°C to 120°C
PE	-20°C to 80°C

► Cap Selection Guide

Materials	Safety Temperature
PP Cap	-20°C to 100°C
Aluminum Cap	-60°C to 300°C

Better Your Chromatography Consumables.



ALWSCI[®]

HOT PRODUCTS



UltraVial

- ◆ Resealable box helps to prevent contamination during use.
- ◆ Constructed with PTFE/ Silicone septa for contamination free sampling.
- ◆ Ultra Clean PTFE/ Silicone septa is optimized for gas chromatography and mass spectrometry.

> UltraVial - 2mL Vials & Closures



Ref.No.	C0001170	C0001172
Description	2mL Clear Glass 12x32mm Flat Base 9-425 Screw Thread Vial with Label. Blue 9-425 Open Top Ribbed Screw Cap with 9mm Red PTFE/White Silicone Septa 1mm Thick (UltraClean).	2mL Amber Glass 12x32mm Flat Base 9-425 Screw Thread Vial with Label. Blue 9-425 Open Top Ribbed Screw Cap with 9mm Red PTFE/White Silicone Septa 1mm Thick (UltraClean).
Vial Cap Septa are pre-assembled together. Blue Kit Packing. 100sets/pk		



Ref.No.	C0001017	C0001018	C0001019
Description	Black 8-425 Open Top Screw Cap with 8mm Red PTFE/White Silicone Septa 1.5mm Thick (UltraClean).	Blue 11mm Open Top Snap Cap with Red PTFE/White Silicone Septa 1mm Thick (UltraClean).	Blue 9-425 Open Top Ribbed Screw Cap with 9mm Red PTFE/White Silicone Septa 1mm Thick (UltraClean).
100pcs/pk			



Ref.No.	C0001020	C0001021	C0001028
Description	Blue 9-425 Open Top Ribbed Screw Cap with 9mm Red PTFE/White Silicone Septa 1mm Thick PRE-SLIT (UltraClean).	Red 9-425 Open Top Smooth Screw Cap with 9mm Red PTFE/White Silicone 1mm Thick (UltraClean).	Blue 9-425 Open Top Ribbed Screw Cap with 9mm White PTFE/Red Silicone Septa 1mm Thick (UltraClean).
100pcs/pk			



Ref.No.	C0001037	C0001056
Description	Black 8-425 Open Top Screw Cap with 8mm Blue PTFE/White Silicone Septa 1.5mm Thick (UltraClean).	Blue 9-425 Open Top Ribbed Screw Cap with 9mm Blue PTFE/White Silicone Septa 1mm Thick PRE-SLIT (UltraClean).
100pcs/pk		





> UltraVial - ND18



Ref.No.	C0000974	C0000975
Description	18mm Silver Color Open Top Metal Cap (8mm hole) with 17,5mm White PTFE/Blue Transparent Silicone Septa 1.5mm Thick (UltraClean).	18mm Silver Color Open Top Metal Cap (8mm hole) with 17,5mm Natural PTFE/Blue Transparent Silicone Septa 1.5mm Thick (UltraClean).
	100pcs/pk.	

> UltraVial - ND20



Ref.No.	C0000927	C0000972	C0000973
Description	20mm Open Top Aluminum Crimp Cap (10mm hole) with 20mm White PTFE/Blue Silicone Septa 3mm Thick (UltraClean).	20mm Open Top Aluminum Crimp Cap (10mm hole) with 20mm White PTFE/Blue Transparent Silicone Septa 3mm Thick (UltraClean).	20mm Open Top Aluminum Crimp Cap (10mm hole) with 20mm Natural PTFE/Blue Transparent Silicone Septa 3mm Thick (UltraClean).
	100pcs/pk		

> UltraVial - ND24



Ref.No.	C0000316	C0001082	C0001189
Description	22mm Blue PTFE/White Silicone 3.0mm thick Septa (Ultra Clean).	22mm Natural PTFE/White Silicone 3.0mm thick Septa (Ultra Clean).	24-400 White Open Top PP Screw Cap with 22mm Natural PTFE/ White Silicone 3.0mm Thick Septa (EPA Quality).
	100pcs/pk		



EPA/TOC Vials & Closures

- If you are doing any sampling, testing, or validation, you need to make sure the results were not skewed by a contaminant that may have come from the container.
- ALWSCI offers a range of certified EPA Screw Vial Convenience Kits which are suitable on all TOC manufacturer's instruments, including Sievers, Shimadzu, OI Analytical, and Teledyne-Tekmar.
- All Certified to contain <10ppb Carbon, giving you confidence in the quality of your TOC measurements.
- Teflon lined caps and protective dust covers.
- Superior vial-to-vial consistency.
- Capped with teflon lined silicone septa and dust cover.
- Widely apply to air, water, soil analysis test, also pesticide residue, pharmaceutical manufacturing and forensic test.

> UltraVial - EPA/TOC



Ref.No.	C0000413	C0000331	C0000338/C0000339
Description	20mL 27.5x57mm Clear Glass EPA/TOC Vial 24-400 White Open Top PP Screw Cap with 22mm Natural PTFE/White Silicone 3.0mm thick Septa (EPA Quality).	20mL 27.5x57mm Amber Glass EPA/TOC Vial 24-400 White Open Top PP Screw Cap with 22mm Natural PTFE/White Silicone 3.0mm thick Septa (EPA Quality).	20mL 27.5x57mm Clear/Amber Glass EPA/TOC Vial 24-400 White Open Top PP Screw Cap with 22mm Natural PTFE/White Silicone 3.0mm thick Septa (EPA Quality) and Dust Cover.
pre-assembled together. 100pcs/pk.			



Ref.No.	C0000334	C0000335	C0000342/C0000343
Description	40mL 27.5x95mm Clear Glass EPA/TOC Vial 24-400 White Open Top PP Screw Cap with 22mm Natural PTFE/White Silicone 3.0mm thick Septa (EPA Quality).	40mL 27.5x95mm Amber Glass EPA/TOC Vial 24-400 White Open Top PP Screw Cap with 22mm Natural PTFE/White Silicone 3.0mm thick Septa (EPA Quality).	40mL 27.5x95mm Clear/Amber Glass EPA/TOC Vial 24-400 White Open Top PP Screw Cap with 22mm Natural PTFE/White Silicone 3.0mm thick Septa (EPA Quality) and Dust Cover.
pre-assembled together. 72pcs/pk.			



Ref.No.	C0000336	C0000337	Blue Kit Packing
Description	60mL 27.5x140mm Clear Glass EPA/TOC Vial 24-400 White Open Top PP Screw Cap with 22mm Natural PTFE/White Silicone 3.0mm thick Septa (EPA Quality).	60mL 27.5x140mm Amber Glass EPA VOA VOC TOC Vial 24-400 White Open Top PP Screw Cap with 22mm Natural PTFE/White Silicone 3.0mm thick Septa (EPA Quality).	
pre-assembled together. 100pcs/pk.			



Bonded

- Our bonding machines are fully automated to bond liners to caps using a mechanical bond without any adhesives or chemicals.
- No glue contamination.
- No additional assembly.
- Prevent liner fallout.
- Use with different polypropylene caps.
- Available in 1mm-3mm standard thicknesses; customization is available.
- Ideal for medical devices, diagnostics packaging and specialty chemicals.

>ND 9 Closures



Ref.No.	C0000144	C0001359
Description	Blue 9-425 Open Top Ribbed Screw Cap Bonded with 9mm Red PTFE/White Silicone Septa 1mm Thick.	Blue 9-425 Open Top Ribbed Screw Cap Bonded with 9mm Red PTFE/White Silicone Septa 1mm Thick PRE-SLIT.
		100pcs/pk.



>ND 24 Closures



Ref.No.	C0001414
Description	24-400 White Open Top PP Screw Cap Bonded with 22mm Natural PTFE/White Silicone Septa 3mm Thick.
	100pcs/pk.





ALWSCI®

AUTOSAMPLER VIALS & CLOSURES



Screw Neck ND8

- ♦ Standard opening vials for GC and HPLC, used on instruments of Shimadzu, Varian, Gilson etc.
- ♦ To meet your micro sampling needs, ALWSCI has a variety of micro volume inserts with capacities and designs that can transform our vials from full-capacity to limited volume with one simple step.
- ♦ Standard opening requires Micro-insert with a diameter of 5mm.
- ♦ Micro inserts with flat bottom, conical base, with plastic spring are available.
- ♦ The conical design permits complete sample removal.



Ref.No.	C000001	C000002	C000003	C000004
Description	2mL Clear Glass 12x32mm Flat Base 8-425 Screw Thread Vial.	2mL Clear Glass 12x32mm Flat Base 8-425 Screw Thread Vial with Label.	2mL Amber Glass 12x32mm Flat Base 8-425 Screw Thread Vial.	2mL Amber Glass 12x32mm Flat Base 8-425 Screw Thread Vial with Label.

100pcs/pk

> 8mm Septa



Ref.No.	C0000436	C0000943	C0000321	C0000964	C0000445	C0000999
Description	8-425 Red PTFE/White Silicone 1mm Thick.	8-425 Red PTFE/White Silicone 1.3mm Thick.	8-425 Red PTFE/White Silicone 1.5mm Thick.	8-425 Red PTFE/White Silicone Septa 1.5mm Thick Pre-slit.	8-425 White PTFE/Red Silicone Septa 1.5mm thick.	8-425 Blue PTFE/White Silicone Septa 1.5mm thick.

100pcs/pk


> ND8 Closures



Ref.No.	C0000931	C0000957	C0000133	C0000409
Description	Black 8-425 Open Top Screw Cap.	White 8-425 Open Top Screw Cap.	Black 8-425 Open Top Screw Cap with 8mm Red PTFE/White Silicone Septa 1.5mm Thick.	White 8-425 Open Top PP Cap with 8mm White PTFE/Red Silicone Septa 1.5mm Thick.

100pcs/pk

> 5mm Micro Insert

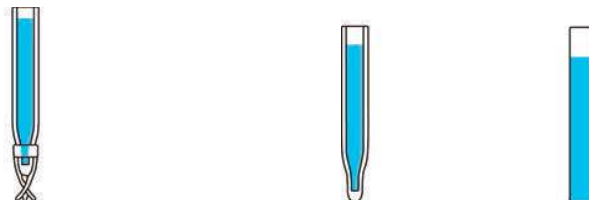

Ref.No.	C0000074	C0000075	C0000076
Description	5x29mm Insert Clear Glass Conical Base with Polyspring.	5x31mm Insert Clear Glass Conical Base.	5x31mm Insert Clear Glass Flat Base.

100pcs/pk



Short Neck ND9

- Wide opening 9-425 vials can be used on all common autosamplers, perfectly compatible with Agilent, Thermo Scientific, Waters, Varian, etc.
- Vials with intergrated micro-insert are available in clear and amber glass.
- Wide opening 12x32mm, 2ml Polypropylene vials have chemically resistance, which are used for atomic absorption, water and protein analysis, capillary electrophoresis, ion chromatography applications etc.
- PTFE/silicone slit shape choices are Single, Y-shape, Cross available.
- The polymer spring acts as a shock absorber that protects against breakage if the needle bottoms out.
- Vials and closures are available for packing into a kit to reduce the risk of contamination of vials in laboratories.
- A variety of septa colors and pre-assmbled closures are available to offer as request.



Ref.No.	C0000006	C0000008	C0000010	C0000011
Description	2mL Clear Glass 12x32mm Flat Base 9-425 Screw Thread Vial.	2mL Clear Glass 12x32mm Flat Base 9-425 Screw Thread Vial with Label.	2mL Amber Glass 12x32mm Flat Base 9-425 Screw Thread Vial.	2mL Amber Glass 12x32mm Flat Base 9-425 Screw Thread Vial with Label.
100pcs/pk				



Ref.No.	C0000084	C0000410	C0000127
Description	0,3mL 9-425 PP Screw Thread Micro-Vial Transparent. 12x32mm.	2mL 9-425 Wide Opening PP Screw Vial with Graduations Transparent .	2mL 9-425 12x32mm Clear Screw Thread Vial Bottom with Integrated 0.2ml Glass Micro-insert.
100pcs/pk			



Ref.No.	C0000961	C0000962
Description	2mL Amber Glass 12x32mm Flat Base 9-425 Screw Thread Vial with Label. Blue 9-425 Open Top Ribbed Screw Cap with 9mm White PTFE/Red Silicone Septa 1mm Thick.	2mL Clear Glass 12x32mm Flat Base 9-425 Screw Thread Vial with Label. Blue 9-425 Open Top Ribbed Screw Cap with 9mm White PTFE/Red Silicone Septa 1mm Thick.
Kit Packing. 100pcs/pk		



> 9mm Septa



Ref.No.	C0000402	C0000329	C0000439	C0000324	C0000431
Description	9-425 Red PTFE/White Silicone Septa 1mm Thick.	9-425 White PTFE/Red Silicone Septa 1mm Thick. .	9-425 Blue PTFE/White Silicone Septa 1mm Thick.	9-425 Red PTFE/White Silicone Septa 1mm Thick Pre-slit.	9-425 Blue PTFE/White Silicone Septa 1mm Thick Pre-slit.
	100pcs/pk				



Ref.No.	C0001133	C0000801	C0000460
Description	9-425 Red PTFE/White Silicone Septa 1.0mm Thick Pre-slit(Mercedes Shape).	9-425 Red PTFE/White Silicone Septa 1mm Thick Pre-slit(Cross Shape).	9-425 Natural PTFE/White Silicone Septa 1mm thick.
	100pcs/pk		

> ND9 Cap




Ref.No.	C0000421	C0000327	C0001132	C0001051	C0000856
Description	Blue 9-425 Open Top Smooth Screw Cap.	Blue 9-425 Open Top Ribbed Screw Cap.	Black 9-425 Open Top Smooth Screw Cap.	Black 9-425 Open Top Ribbed Screw Cap.	Gold Magnetic 9-425 Open Top Screw Cap.
	100pcs/pk				

> ND9 Closures



Ref.No.	C0000143	C0000148	C0000149
Description	Blue 9-425 Open Top Ribbed Screw Cap with 9mm Red PTFE/White Silicone Septa 1mm Thick.	Blue 9-425 Open Top Ribbed Screw Cap with 9mm Red PTFE/White Silicone Septa 1mm Thick Pre-slit.	Blue 9-425 Open Top Ribbed Screw Cap with 9mm Blue PTFE/White Silicone Septa 1mm Thick Pre-slit.
	100pcs/pk		

> 6mm Micro Insert



Ref.No.	C0000070	C0000072	C0000073	C0000077
Description	6x29mm Insert Clear Glass Conical Base with Polyspring.	6x31mm Insert Clear Glass Conical Base.	6x31mm Insert Clear Glass Flat Base.	6x29mm PP Insert Conical Base.
	100pcs/pk			



Crimp Neck ND11

- The Crimp Vials are used on instruments of Agilent, PerkinElmer, Varian, etc.
- The wide opening crimp cap provides a larger target area for improved autosampler needle accuracy.
- Vials with intergrated Micro-insert are also available in clear and amber glass.
- PTFE/silicone, Natural Rubber/TEF septa, single slit septa to choose.
- The 3-layer septa of Natural Rubber/Red Butyl/TEF combines the good physical properties of Nat. Rubber (Resealability) with good chemical properties of butyl. (See Customized service page)



Ref.No.	C0000014	C0000015	C0000016	C0000018	C0000129
Description	2mL Clear Glass Flat Base 11mm Crimp Vial Wide Opening.	2mL Clear Glass Flat Base 11mm Crimp Vial Wide Opening with Label.	2mL Amber Glass Flat Base 11mm Crimp Vial Wide Opening.	2mL Amber Glass Flat Base 11mm Crimp Vial Wide Opening with Label.	2mL 11mm Crimp Top Clear Vial Bottom with Integrated 0.2ml Glass Micro-insert.
	100pcs/pk				

>ND 11 Closures



Ref.No.	C0000164	C0000165	C0000166	C0000167
Description	SILVER 11mm Open Top Crimp Cap with CLEAR TEF/ Red Silicone Septa 1mm Thick.	SILVER 11mm Open Top Crimp Cap with Red PTFE/ White Silicone Septa 1mm Thick.	SILVER 11mm Open Top Crimp Cap with Red PTFE/ White Silicone/Red PTFE Septa 1mm Thick.	SILVER 11mm Open Top Crimp Cap with Red Silicone Septa 1mm Thick.
	100pcs/pk			



Ref.No.	C0000168	C0000169 ★ Patent No..CN10716331B	C0000980
Description	SILVER 11mm Open Top Crimp Cap with White PTFE/ Red Silicone Septa1mm Thick.	SILVER 11mm Open Top Crimp Cap with Transparent TEF/Natural Rubber red-orange Septa 1mm Thick.	SILVER 11mm Open Top Crimp Cap with Red PTFE/ White Silicone Septa 1mm Thick Pre-slit.
	100pcs/pk		



Snap Neck ND11

- The vials are used on instruments of Agilent, CTC, Thermo Scientific, Waters, etc.
- Snap Ring finish eliminates the need for crimping or decapping.
- The intergrated Micro-insert are available for in clear and amber glass, micro-inserts can be delivered pre-assembled in vials.
- Snap ring caps are also available in a soft quality with transparent or blue caps, soft caps are more convenient in handling (pushing on/removal).
- The septa shapes have Single and Snow type to choose.



Ref.No.	C000020	C000021	C000022	C000023	C0000130
Description	2mL Clear Glass Flat Base 11mm Snap Vial Wide Opening.	2mL Clear Glass Flat Base 11mm Snap Vial Wide Opening with Label.	2mL Amber Glass Flat Base 11mm Snap Vial Wide Opening.	2mL Amber Glass Flat Base 11mm Snap Vial Wide Opening with Label.	2mL 11mm Snap Top Clear Vial Bottom with Integrated 0.2mL Glass Micro-insert.
	100pcs/pk				

>ND 11 Closures



Ref.No.	C0000170	C0000171	C0000172	C0000173
Description	CLEAR 11mm Open Top Snap Cap with Red PTFE/White Silicone Septa 1mm Thick.	BLUE 11mm Open Top Snap Cap with Red PTFE/White Silicone Septa 1mm Thick.	RED 11mm Open Top Snap Cap with Red PTFE/White Silicone Septa 1mm Thick.	CLEAR 11mm Open Top Snap Cap with Red PTFE/White Silicone/Red PTFE Septa 1mm Thick.
	100pcs/pk			



Ref.No.	C0000174	C0000175	C0000176	C0000177
Description	CLEAR 11mm Open Top Snap Cap with Red PTFE/White Silicone Septa 1mm Thick Pre-slit.	CLEAR 11mm Open Top Snap Cap with Red PTFE/White Silicone Septa 1mm Thick Pre-slit (snow shape).	CLEAR 11mm Open Top Snap Cap with Transparent TEF/Natural Rubber red-orange Septa 1mm Thick.	CLEAR 11mm Open Top Snap Cap with White PTFE/Red Silicone Septa 1mm Thick.
	100pcs/pk			



Short Thread ND13

- The vials are used on instruments of Dionex, Shimadzu, VWR, Waters etc.
- 4ML vials are widely used in compound storage as well as for Chromatography vials, available as closed or open top screw seals with 13-425 thread.



Ref.No.	C000024	C000025	C000026	C000027
Description	4mL Clear Glass 15x45mm Flat Base 13-425 Screw Thread Vial.	4mL Clear Glass 15x45mm Flat Base 13-425 Screw Thread Vial with Label.	4mL Amber Glass 15x45mm Flat Base 13-425 Screw Thread Vial.	4mL Amber Glass 15x45mm Flat Base 13-425 Screw Thread Vial with Label.
	100pcs/pk			

>ND 13 Septa



Ref.No.	C0000322	C0000408	C0000863	C0000935	C0001134
Description	13mm Red PTFE/White Silicone Septa 1mm Thick.	13mm Red PTFE/White Silicone Septa 1mm Thick Pre-slit.	13mm White PTFE/Red Silicone Septa 1mm Thick.	13mm Natural PTFE/White Silicone Septa 1mm thick.	13mm Pure PTFE Septa 1.0mm Thick.
	100pcs/pk				

>ND 13 Closures



Ref.No.	C0000179	C0000180	C0000181	C0000182
Description	Black PP 13-425 Open Top Screw Cap with Red PTFE/White Silicone Septa 1mm Thick.	Black PP 13-425 Open Top Screw Cap with Red PTFE/White Silicone Septa 1mm Thick Pre-slit.	Black PP 13-425 Open Top Screw Cap with White PTFE/Red Silicone Septa 1mm Thick.	Black PP 13-425 Open Top Screw Cap with Natural PTFE/White Silicone Septa 1mm Thick.
	100pcs/pk			



Shell Vial

- The vial with soft plug is used on Waters and Shimadzu, the star-shaped plug is for easy penetration.
- The normal size is 8x40mm, and 8x30mm is also available.



Ref.No.	C000078	C000080
Description	1mL 8x40mm Flat Base Clear Glass Shell Vial with Plug.	1mL 8x30mm Flat Base Clear Glass Shell Vial with Plug.
200pcs/pk.		

High Recovery Vial

- High recovery vials combine large sample capacities with near full sample extraction.
- Excellent for Compound Storage.
- Smoothly sloped inner conical surface ensures a high level of solid/liquid recovery.



Ref.No.	C0001211	C0001212
Description	1.5mL High Recovery Vial Clear Glass 12x32mm Flat Base 9-425 Screw Thread.	1.5mL High Recovery Vial Amber Glass 12x32mm Flat Base 9-425 Screw Thread.
100pcs/pk.		

Test Tube

- Screw thread test tubes include PP caps with PTFE/silicone septa, which is made from Borosilicate glass tubing.



Ref.No.	C0001093	C0001138	C0000131
Description	15-415 Black Closed Top PP Cap with Blue PTFE/White Silicone Septa 1.5mm Thick.	15-415 White Closed Top PP Cap for Test Tube with 15mm Natural PTFE/White Silicone Septa 1.5mm Thick.	Test Tube Clear Glass 16x100mm Rounded Bottom Capacity to Neck 11mL. Chinesing Tubing.
250pcs/pk.			

Screw Neck ND10

- Wide-opening vials provide an increased target area for easier sample preparation and to reduce the chance of bent or broken needles during sampling.
- Designed to work in Agilent and other autosamplers.



Ref.No.	C0001191	C0001192	C0001210
Description	2mL Clear Glass 12x32mm Flat Base 10-425 Screw Thread Vial with Label.	2mL Amber Glass 12x32mm Flat Base 10-425 Screw Thread Vial with Label.	Black 10-425 Open Top Screw Cap with Red PTFE/White Silicone Septa 1mm Thick.
100pcs/pk			



ALWSCI[®]

HEADSPACE VIALS & CLOSURES



Screw Headspace ND18

- Pre-assembling vial+closure service is available upon request.
- The magnetic screw caps can be used for headspace as well as for SPME.
- Type of Cap: Magnetic Precision screw cap, Closed Precision screw cap.



Ref.No.	C000028	C000029	C000030	C000031	C0000920	C0001139
Description	10mL Clear Glass Screw Headspace Vial 22.5x46mm.	10mL Amber Glass Screw Headspace Vial 22.5x46mm.	20mL Clear Glass Screw Headspace Vial 22.5x75mm.	20mL Amber Glass Screw Headspace Vial 22.5x75mm.	18mm Silver Color Open Top Metal Cap.	18mm Silver Color Closed Top Metal Cap.
100pcs/pk						



Ref.No.	C0000208	C0000474	C0000400	C0000438
Description	18mm Silver Color Open Top Metal Cap (8mm hole) with 17.5mm Blue PTFE/White Silicone Septa 1.5mm Thick.	18mm Silver Color Closed Top Metal Cap with Blue PTFE/White Silicone Septa 1.5mm Thick.	Blue PTFE/White Silicone Septa 1.5mm thick.	Red PTFE/White Silicone Septa 1.5mm Thick.
(used for 18mm magnetic screw cap).				
100pcs/pk				

>ND 18 Pre-assembled



Ref.No.	C0000977	C0000976
Description	10mL Clear Glass Screw Headspace Vial 22.5x46mm 18mm Silver Color Open Top Metal Cap (8mm hole) with 17.5mm Blue PTFE/White Silicone Septa 1.5mm Thick Vial Cap Septa are pre-assembled together.	20mL Clear Glass Screw Headspace Vial 22.5x75mm 18mm Silver Color Open Top Metal Cap (8mm hole) with 17.5mm Blue PTFE/White Silicone Septa 1.5mm Thick Vial Cap Septa are pre-assembled together.
100pcs/pk		



Crimp Headspace ND20

- ♦ GC Headspace technology for the analysis of volatile organic solids and liquid samples after gasification
- ♦ The headspace volume have 6ml, 10ml, 20ml clear/amber to choose, the bottom have flat, rounded and rounded-flat.
- ♦ **Type of Cap:**
- ♦ Aluminum Cap, Bimetal cap, Magnetic crimp cap.
- ♦ **Type of Liner:**
- ♦ Butyl, Butyl/PTFE, Pharma-fix liner, PTFE/silicone, Butyl stopper.



Ref.No.	C0000032	C0000033	C0000034	C0000035	C0000036
Description	6mL Clear Glass 22x38mm, 20mm Beveled Edge. Flat Bottom. Short Neck. Crimp Headspace Vial.	10mL Clear Glass 22,5x46mm. 20mm Beveled Edge. Flat Bottom. Crimp Headspace Vial.	10mL Clear Glass 22,5x46mm, 20mm Beveled Edge. Rounded-flat Bottom. Crimp Headspace Vial.	10mL Amber Glass 22,5x46mm, 20mm Beveled Edge. Flat Bottom. Crimp Headspace Vial.	20mL Clear Glass 22,5x75mm, 20mm Beveled Edge. Flat Bottom. Crimp Headspace Vial.
100pcs/pk					



Ref.No.	C0000038	C0000039	C0000040
Description	20mL Clear Glass 22.5x75mm. 20mm Beveled Edge. Rounded-Flat Bottom. Crimp Headspace Vial.	20mL Clear Glass 22.5x75mm. 20mm Beveled Edge. Rounded-Flat Bottom. Crimp Headspace Vial. Short Neck.	20mL Amber Glass 22.5x75mm. 20mm Beveled Edge. Rounded-Flat Bottom. Crimp Headspace Vial. Short Neck.
100pcs/pk			

>ND 20 Closures



Ref.No.	C0000196	C0000197	C0000198
Description	20mm Open Top Aluminum Crimp Cap (10mm hole) with 20mm Natural PTFE/White Silicone Septa 3mm Thick.	20mm Open Top Aluminum Crimp Cap (10mm hole) with 20mm Natural PTFE/Blue Silicone Septa 3mm Thick.	20mm Open Top Aluminum Crimp Cap (10mm hole) with 20mm White PTFE/White Silicone Septa 3mm Thick.
100pcs/pk			



Ref.No.	C0000199	C0000200	C0000201
Description	20mm Open Top Aluminum Crimp Cap (10mm hole) with 20mm White PTFE/Blue Silicone Septa 3mm Thick.	20mm Open Top Aluminum Crimp Cap (10mm hole) with 20mm Red PTFE/White Silicone Septa 3mm Thick.	20mm Open Top Aluminum Crimp Cap (10mm hole) with 20mm Natural PTFE/Natural Silicone Septa 3mm Thick.
100pcs/pk			



Ref.No.	C0000204	C0000205	C0000206
Description	20mm Open Top Gold Magnetic Crimp Cap (10mm hole) with 20mm Natural PTFE/Blue Silicone Septa 3mm Thick	20mm Open Top Gold Magnetic Crimp Cap (10mm hole) with 20mm Natural PTFE/White Silicone Septa 3mm Thick.	20mm Open Top Bi-Metallic Crimp Cap (8mm hole) Blue & Silver with 20mm Natural PTFE/White Silicone Septa 3mm Thick.
100pcs/pk			



Ref.No.	C0000207	C0000835	C0000855
Description	20mm Open Top Bi-Metallic Crimp Cap (8mm hole) Blue & Silver with 20mm Natural PTFE/Natural Silicone Septa 3mm Thick.	20mm Open Top Gold Magnetic Crimp Cap (10mm hole) with 20mm White PTFE/Blue Silicone Septa 3mm Thick.	20.2mm Open Top Aluminum Crimp Cap (10mm hole) with Moulded Grey PTFE/Butyl Septa one ring 3mm Thick.
100pcs/pk			



Ref.No.	C0000951	C0000952	C0001012
Description	20mm Open Top Bi-Metallic Crimp Cap (8mm hole) Red & Silver with 20mm Natural PTFE/Natural Silicone Septa 3mm Thick.	20mm Open Top Bi-Metallic Crimp Cap (8mm hole) Gold & Silver with 20mm Natural PTFE/Natural Silicone Septa 3mm Thick.	20.2mm Open Top Aluminum Crimp Cap (10mm hole) with Moulded Pharma-fix-septa Grey PTFE/Butyl 3mm thick.
100pcs/pk			

> 20mm Butyl Septa



Ref.No.	C0000407	C0000433	C0000448	C0000449	C0000450	C0000423
Description	20mm Moulded Grey PTFE/Butyl Septa one ring 3mm thick.	20mm Moulded Grey Butyl Injection Stopper.	20mm Moulded Grey Butyl Septa one ring. 3mm thick.	20mm Moulded Grey Butyl Septa both rings.	20mm Grey PTFE/Butyl without ring. 3mm thick.	20mm Moulded Pharma-fix-septa Grey PTFE/Butyl 3mm thick.
100pcs/pk						



Customized Service

- ◆ Logo printing, Package Label, Cap Color, Septa Size and Septa Color, all of them can be customized based on huge quantities.



Ref.No.	C0000750	C0000751	C0000752	C0000753
Description	2mL Clear Glass 12x32mm Flat Base 8-425 Screw Thread Vial with Label and ALWSCI Printing.	2mL Amber Glass 12x32mm Flat Base 8-425 Screw Thread Vial with Label and ALWSCI Printing.	2mL Clear Glass 12x32mm Flat Base 9-425 Screw Thread Vial with Label and ALWSCI Printing.	2mL Amber Glass 12x32mm Flat Base 9-425 Screw Thread Vial with Label and ALWSCI Printing.
	100pcs/pk.			



Ref.No.	C0000754	C0000755	C0000756	C0000757
Description	2mL Clear Glass Flat Base 11mm Crimp Vial Wide Opening with Label and ALWSCI Printing.	2mL Amber Glass Flat Base 11mm Crimp Vial Wide Opening with Label and ALWSCI Printing.	2mL Clear Glass Flat Base 11mm Snap Vial Wide Opening with Label and ALWSCI Printing.	2mL Amber Glass Flat Base 11mm Snap Vial Wide Opening with Label and ALWSCI Printing.
	100pcs/pk.			




Ref.No.	C0001055	C0001140
Description	Blue PTFE/White Silicone Septa. 14.7x3mm (UltraClean).	11mm Transparent TEF/Butyl Red/ Natural Rubber Red-orange Septa.
	100pcs/pk.	



Ref.No.	C0001415 ★★★
Description	24-400 Blue Open Top PP Screw Cap with 22mm Natural PTFE/White Silicone Septa 3mm Thick.
	100pcs/pk.

★ OEM services of any other color caps are available.

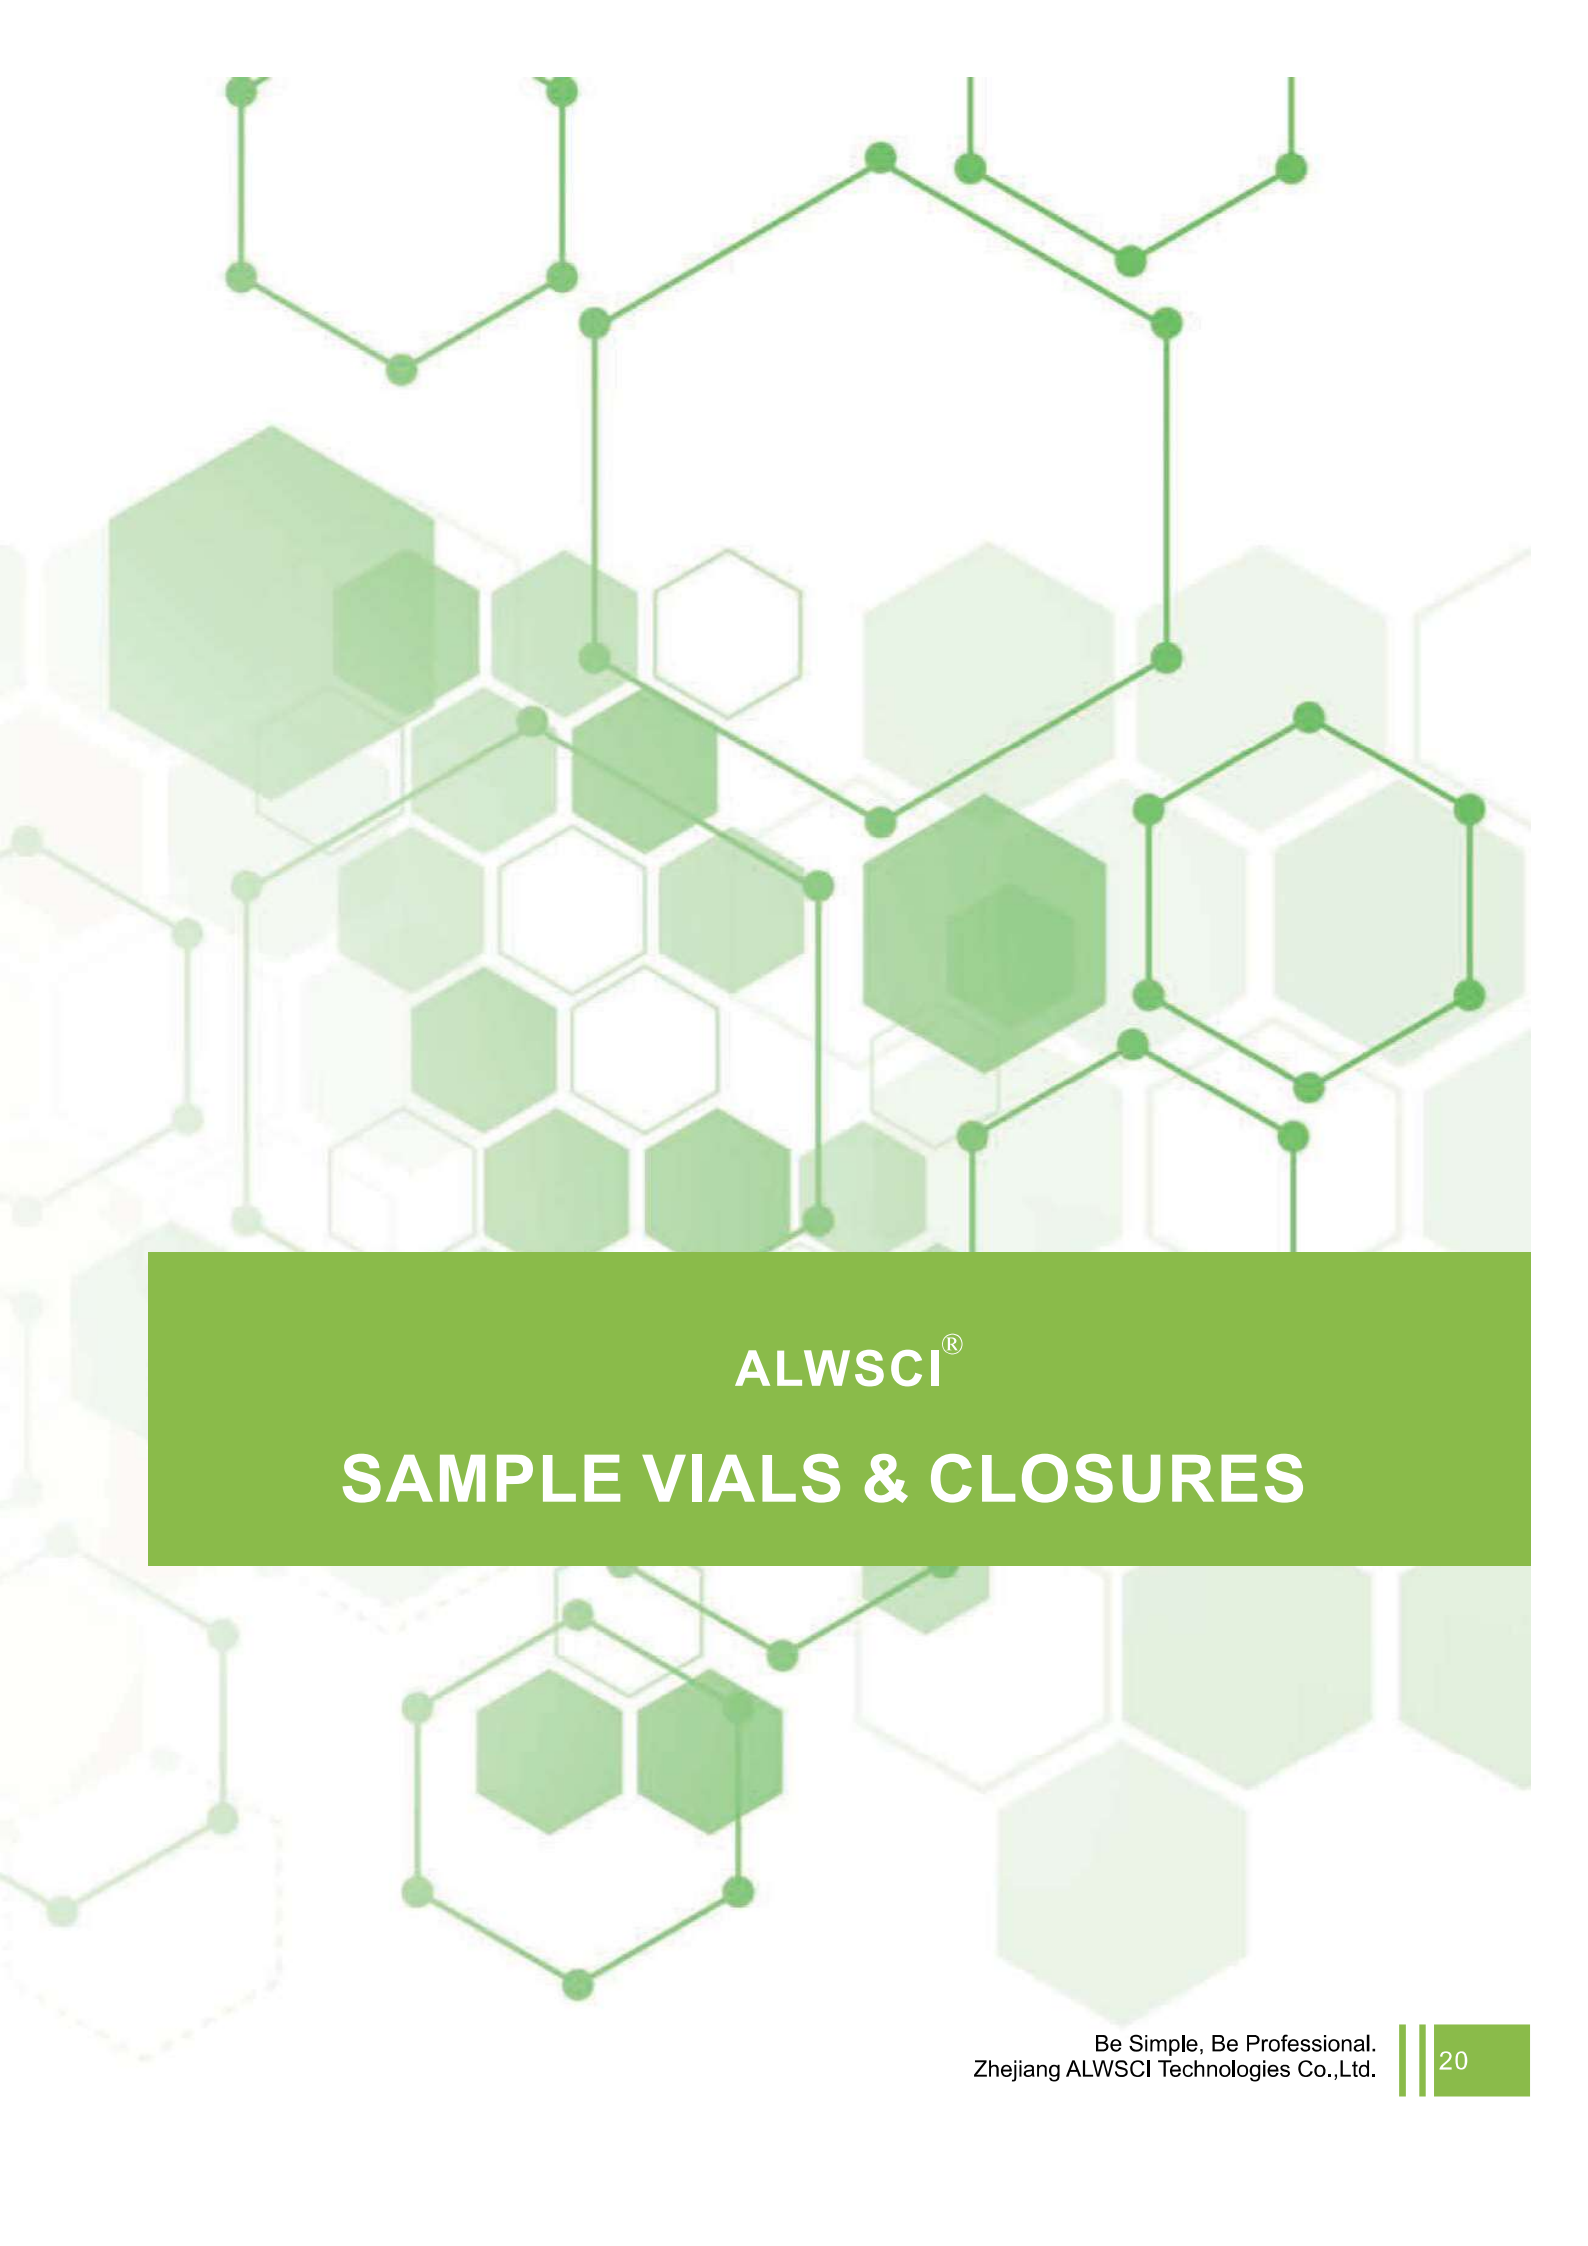

ALWSCI[®]

SAMPLE VIALS & CLOSURES



Sample Vials & Closures

> Sample Vials & Closures

- ◆ Screw vials for storage purpose, vials with different volumes are available.
- ◆ Vial Color: Clear, Amber.
- ◆ Cap Color: White, Black, Red, Blue, Yellow, Green, etc.
- ◆ Septa material: PE, PTFE/Silicone, Silicone only, etc.
- ◆ Pre-assemble service is available.



Ref.No.	C000006	C000041	C000024	C000044	C000048	C000049
Description	2mL Clear Glass Sample Vial 12x32mm 9-425 Screw Thread.	2mL Amber Glass Sample Vial 12x32mm 9-425 Screw Thread.	4mL Clear Glass Sample Vial 15x45mm 13-425 Screw Thread.	4mL Amber Glass Sample Vial 15x45mm 13-425 Screw Thread.	7mL Clear Glass Sample Vial 22x40mm 18-400 Screw Thread.	7mL Amber Glass Sample Vial 22x40mm 18-400 Screw Thread.
100pcs/pk						



Ref.No.	C000051	C000052	C000053	C000054	C000055	C000056
Description	8mL Clear Glass Sample Vial 17x60mm 15-425 Screw Thread.	8mL Amber Glass Sample Vial 17x60mm 15-425 Screw Thread.	10mL Clear Glass Sample Vial 22x52mm 18-400 Screw Thread.	10mL Amber Glass Sample Vial 22x52mm 18-400 Screw Thread.	16mL Clear Glass Sample Vial 22x72.5mm 18-400 Screw Thread.	16mL Amber Glass Sample Vial 22x72.5mm 18-400 Screw Thread.
100pcs/pk						



Ref.No.	C000057	C000058	C000059	C000060	C000122	C000123
Description	20mL Clear Glass Sample Vial 27.5x57mm 24-400 Screw Thread.	20mL Amber Glass Sample Vial 27.5x57mm 24-400 Screw Thread.	30mL Clear Glass Sample Vial 27.5x84mm 24-400 Screw Thread.	30mL Amber Glass Sample Vial 27.5x84mm 24-400 Screw Thread.	22mL Clear Glass Sample Vial 23x85mm. 20-400 Screw Thread.	22mL Amber Glass Sample Vial 23x85mm 20-400 Screw Thread.
100pcs/pk						



Ref.No.	C000061	C000062	C000065	C000066
Description	40mL Clear Glass Sample Vial 27.5x95mm 24-400 Screw Thread.	40mL Amber Glass Sample Vial 27.5x95mm 24-400 Screw Thread.	60mL Clear Glass Sample Vial 27.5x140mm 24-400 Screw Thread.	60mL Amber Glass Sample Vial 27.5x140mm 24-400 Screw Thread.
	100pcs/pk			

> Storage Cap & Septa



Ref.No.	C0000453	C0000455	C0000864	C0001135	C0000858	C0000482
Description	9-425 Blue Smooth Closed PP Top Cap.	13-425 Black Closed Top PP Cap.	13-425 White Closed Top PP Cap.	13-425 Red Closed Top PP Cap.	13-425 Green Closed Top PP Cap.	15-425 Black Closed Top PP Cap.
	100pcs/pk					



Ref.No.	C0000988	C0000480	C0000456	C0001136	C0000859	C0000860
Description	15-425 White Closed Top PP Cap.	18-400 Black Closed Top PP Cap.	18-400 White Closed Top PP Cap.	20-400 Black Closed Top PP Cap.	20-400 White Closed Top PP Cap.	22-400 Black Closed Top PP Cap.
	100pcs/pk					



Ref.No.	C0000475	C0000481	C0000457	C0000402	C0000322
Description	22-400 White Closed Top PP Cap.	24-400 Black Closed Top PP Cap.	24-400 White Closed Top PP Cap.	9-425 Red PTFE / White Silicone Septa 1.0mm Thick.	13-425 Red PTFE / White Silicone Septa 1.0mm Thick.
	100pcs/pk				



Ref.No.	C0000458	C0000440	C0000958	C0000862	C0000443
Description	15-425 Natural PTFE/White Silicone Septa 1.0mm Thick.	18-400 Natural PTFE/White Silicone Septa 1.5mm Thick.	20-400 Natural PTFE/White Silicone Septa 2.0mm Thick.	22-400 Natural PTFE/White Silicone Septa 2.0mm Thick.	24-400 Natural PTFE/White Silicone Septa 1.5mm Thick.
	100pcs/pk				



24-400 Closures With Sample Vial

- If you are doing any sampling, testing, or validation, you need to make sure the results were not skewed by a contaminant that may have come from the container.
- Teflon lined caps and protective dust covers.
- Superior vial-to-vial consistency.



Ref.No.	C0001144	C0001417
Description	20mL Clear Glass Sample Vial. 27.5x58mm with 24-400 Black Closed Top PP Cap with 22mm Natural PTFE/White Silicone Septa 1.5mm thick.	20mL Amber Glass Sample Vial. 27.5x57mm. with 24-400 White Closed Top PP Cap with 22mm Natural PTFE/White Silicone Septa 1.5mm thick.

Vial+Cap+Septa are pre-assembled together.100pcs/pk.



Ref.No.	C0001096	C0001125
Description	40mL Clear Glass Vial 24-400 White Open Top PP Screw Cap and Natural PTFE/White Silicone 3mm Thick Septa.	40mL Amber Glass Vial 24-400 White Open Top PP Screw Cap and Natural PTFE/White Silicone 3mm Thick Septa.

Vial + Cap + Septa will be pre-assembled together. 72pcs/pk.




Ref.No.	C0001206	C0001207
Description	60mL Clear Glass Vial 24-400 White Open Top PP Screw Cap and Natural PTFE/White Silicone 3mm Thick Septa.	60mL Amber Glass Vial 24-400 White Open Top PP Screw Cap and Natural PTFE/White Silicone 3mm Thick Septa.

Vial + Cap + Septa will be pre-assembled together. 100pcs/pk.



Sample Vial Kit Package

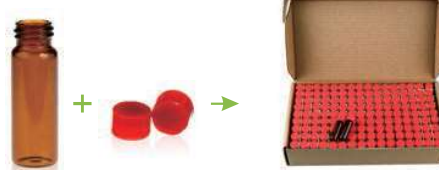

Ref.No.	C0001316	C0001317
Description	4mL Clear Glass Sample Vial with 13-425 Red Closed Top PP Screw Cap and Red PTFE/White Silicone 1mm Thick Septa.	4mL Amber Glass Sample Vial with 13-425 Red Closed Top PP Screw Cap and Natural PTFE/White Silicone 1mm Thick Septa.

Vial + Cap + Septa are pre-assembled together. Packed with dividers. 144pcs/pk.





Ref.No.	C0001327	C0001319
Description	8mL Clear Glass Sample Vial 17x60mm with 15-425 White Closed Top PP Cap with Natural PTFE/White Silicone Septa 1.0mm thick.	8mL Amber Glass Sample Vial 17x60mm with 15-425 White Closed Top PP Cap with Natural PTFE/White Silicone Septa 1.0mm thick.

Vial + Cap + Septa are pre-assembled together. Packed with dividers. 144pcs/pk.



Ref.No.	C0001328	C0001321
Description	20mL Clear Glass Sample Vial. 27.5x58mm with 24-400 White Closed Top PP Cap with 22mm Natural PTFE/White Silicone Septa 1.5mm thick.	20mL Amber Glass Sample Vial. 27.5x58mm with 24-400 White Closed Top PP Cap with 22mm Natural PTFE/White Silicone Septa 1.5mm thick.

Vial + Cap + Septa are pre-assembled together. Packed with dividers. 144pcs/pk.

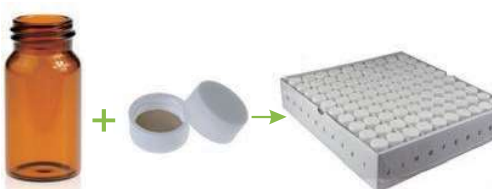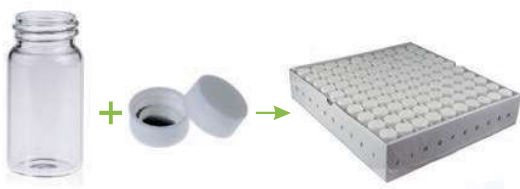

Ref.No.	C0000802	C0000404
Description	20mL Clear Glass Vial. 27.5x58mm with 22-400 White Closed Top PP Cap and Silver Liner.	20mL Amber Glass Vial. 27.5x58mm with 22-400 White Closed Top PP Cap and Natural PTFE / White Silicone Septa.

Vial + Cap + Septa are pre-assembled together. Packed with dividers. 100pcs/pk



Narrow Mouth Bottle

- Boston bottles are widely used for packing of Pharmaceutical intermediate, High value-added chemicals, Fragrance sesame oil, and etc.
- The PTFE/silicone perfect sealing is suitable for long time storage and transportation, PE liner is for an economical choice.
- Pre-assemble service is available.



Ref.No.	C0000115	C0000116	C0000118	C0000119
Description	30mL Amber Glass 20-400 Boston Round Bottle. 32.8x78.58mm.	30mL Clear Glass 20-400 Boston Round Bottle. 32.8x78.58mm.	60mL Amber Glass 20-400 Boston Round Bottle. 38.6x93.66mm.	60mL Clear Glass 20-400 Boston Round Bottle. 38.6x93.66mm.
48pcs/ctn.				



C0000121	C0000122	C0000123	C0000124	C0000125
120mL Amber Glass 22-400 Boston Round Bottle. 48.8x112.73mm.	120mL Clear Glass 22-400 Boston Round Bottle. 48.8x112.73mm.	250mL Amber Glass 24-400 Boston Round Bottle. 61.6x140.8mm.	500mL Amber Glass 28-400 Boston Round Bottle. 83x176.5mm.	1000mL Amber Glass 33-400 Boston Round Bottle. 94x219mm.
24pcs/ctn.	24pcs/ctn.	30pcs/ctn.	12pcs/ctn.	8pcs/ctn.

> Narrow Mouth Bottle Closures



Ref.No.	C0001126	C0001127	C0001128	C0001129
Description	20-400 Black Closed Top PP Cap with Natural PTFE/White Silicone Septa 2.0mm Thick.	20-400 Black Closed Top PP Cap with White PE Septa 1.0mm Thick.	22-400 Black Closed Top PP Cap with Natural PTFE/White Silicone Septa 2.0mm Thick.	22-400 Black Closed Top PP Cap with White PE Septa 1.0mm Thick.
	48pcs/pk.	48pcs/pk.	24pcs/pk.	24pcs/pk.



Ref.No.	C0001130	C0001131	C0000229	C0000230
Description	24-400 Black Closed Top PP Cap with Natural PTFE/White Silicone Septa 1.5mm Thick.	24-400 Black Closed Top PP Cap with White PE Septa 1.0mm Thick.	28-400 Black Closed Top PP Cap with Natural PTFE/White Silicone Septa 1.5mm Thick.	28-400 Black Closed Top PP Cap with White PE Septa 1.0mm Thick.
	30pcs/pk.	30pcs/pk.	12pcs/pk.	12pcs/pk.



Ref.No.	C0000231	C0000233	C0000235
Description	33-400 Black Closed Top PP Cap with Natural PTFE/White Silicone Septa 1.5mm Thick.	33-400 Black Closed Top PP Cap with White PTFE Septa 0.5mm Thick.	33-400 Black Closed Top PP Cap with White PE Septa 1.0mm Thick.
	8pcs/pk.	8pcs/pk.	8pcs/pk.



Wide Mouth Bottle

- Wide mouth bottles are widely used for packing of Pharmaceutical intermediate, High value-added chemicals, etc.
- Offer Packaging customized service.



Ref.No.	C0000105	C0000106	C0000107	C0000108
Description	60mL Amber Glass 33-400 Wide Mouth Bottle 44.5x75.5mm.	75mL Amber Glass 38-400 Wide Mouth Bottle 45.3x82.5mm.	100mL Amber Glass 38-400 Wide Mouth Bottle 50x87.5mm.	120mL Amber Glass 38-400 Wide Mouth Bottle 52.8x95mm.
	48pcs/ctn.	192pcs/ctn.	24pcs/ctn.	24pcs/ctn.



C0000109	C0000110	C0000111	C0000112	C0000113
150mL Amber Glass 45-400 Wide Mouth Bottle 56x100mm.	200mL Amber Glass 45-400 Wide Mouth Bottle 61.4x109.5mm.	250mL Amber Glass 45-400 Wide Mouth Bottle 64x119mm.	300mL Amber Glass 53-400 Wide Mouth Bottle 68.3x126.4mm.	500mL Amber Glass 53-400 Wide Mouth Bottle 80.6x146.5mm.
24pcs/ctn.	24pcs/ctn.	24pcs/ctn.	24pcs/ctn.	12pcs/ctn.

> Wide Mouth Bottle Closures



Ref.No.	C0000231	C0000233	C0000235
Description	33-400 Black Closed Top PP Cap with Natural PTFE/White Silicone Septa 1.5mm Thick.	33-400 Black Closed Top PP Cap with White PTFE Septa 0.5mm Thick.	33-400 Black Closed Top PP Cap with White PE Septa 1.0mm Thick.
		8pcs/pk.	



Ref.No.	C0000255	C0000256	C0000257
Description	38-400 Black Closed Top PP Cap with Natural PTFE/White Silicone Septa 1.5mm Thick. 24pcs/pk.	38-400 Black Closed Top PP Cap with White PTFE Septa 0.5mm Thick. 24pcs/pk.	38-400 Black Closed Top PP Cap with White PE Septa 1.0mm Thick.



Ref.No.	C0000258	C0000259	C0000260
Description	45-400 Black Closed Top PP Cap with Natural PTFE/White Silicone Septa 1.5mm Thick. 24pcs/pk	45-400 Black Closed Top PP Cap with White PTFE Septa 0.5mm Thick. 24pcs/pk.	45-400 Black Closed Top PP Cap with White PE Septa 1.0mm Thick.



Ref.No.	C0000261	C0000262	C0000263
Description	53-400 Black Closed Top PP Cap with Natural PTFE/White Silicone Septa 1.5mm Thick.	53-400 Black Closed Top PP Cap with White PTFE Septa 0.5mm Thick. 12pcs/pk.	53-400 Black Closed Top PP Cap with White PE Septa 1.0mm Thick.



ALWSCI[®]

TOOLS

Tools

- The tools of Vial Rack, Crimper, Decrimper, Safety Caps, GC Septa are widely matched with the chromatography consumables to use.

Vial Rack

- Easy handling and transportation of sample vials.
- Stable standing position because of solid construction.



Ref.No.	C000094	C0001067	C000095	C000096
Description	PP Vial Rack 50 Positions for 2mL Vials Blue Color.	PP Vial Box 100 Positions for 2ml Vials Blue Color. 14x14x5cm.	PP Vial Rack 50 Positions for 4mL Vials Blue Color.	PP Vial Rack for EPA VOA Vials White Color.
	1pc/pk			

Crimper & Decrimper



Ref.No.	C0000265	C0000264	C0000266	C0000267	C0000268	C0000269
Description	Crimper for 11mm Aluminum Crimp Cap Stainless Steel.	Crimper for 20mm Aluminum Crimp Cap Stainless Steel.	Stainless Steel Crimper for 13mm Flip off Cap.	Stainless Steel Crimper for 20mm Flip off Cap.	Decrimper for 11mm Aluminum Crimp Cap Stainless Steel.	Decrimper for 20mm Aluminum Crimp Cap Stainless Steel.
	1pc/pk					



Safety Caps Thread GL45

- GL45 screw cap is also called mobile phase safety cap.
- Inner PTFE can be rotation smooth to make sure the connected tube is flexible.
- Blue, Red, Yellow color are available, corresponding fitting and plug are available as well.



Ref.No.	C0000270	C0000271	C0000272	C0000273	C0000274
Description	Blue GL45 Safety Cap with Two holes for 1/8 inch OD tubing.	Red GL45 Safety Cap with Three holes for 1/8 inch OD tubing.	Yellow GL45 Safety Cap with Four holes for 1/8 inch OD tubing.	Blue GL45 Safety Cap with Two holes for 1/16 inch OD tubing.	Red GL45 Safety Cap with Three holes for 1/16 inch OD tubing.
1pcs/pk					



Ref.No.	C0000275	C0000969	C0000970	C0000971
Description	Yellow GL45 Safety Cap with Four holes for 1/16 inch OD tubing.	10-32unf PEEK Fitting for 1/16" OD Tubing Natural Color.	1/4-28 PEEK Fitting for 1/8" OD Tubing Natural Color.	10-32unf PEEK Blind Plug Natural Color.
1pcs/pk				

GC Septa

- GC septa are used in gas chromatography (GC).
- These GC accessories need to introduce the sample without leakage and withstand the high-temperatures of laboratory ovens.



Ref.No.	C0000437	C0000399	C0000403	C0000800	C0000993
Description	Orange High Temp Ultra Low Bleed GC Septa 11x3mm Pre-Pierced, Used up to 320°C.	Blue Normal Silicone Septa 5x3mm, Used up to 250°C.	Blue Normal Silicone Septa 9,5x3mm, Used up to 250°C.	Orange High Temp Ultra Low Bleed GC Septa 11x3mm, Used up to 320°C.	Orange GC Plug Septa, Ultra Low Bleed Septa, Used Up To 320°C For Shimadzu.
50pcs/pk					



Ref.No.	C0000982	C0001086
Description	Blue Normal Silicone Septa 10,8x3mm, Used up to 250°C.	Blue Normal Silicone Septa 12,5x3mm, Used up to 250°C.
50pcs/pk		



Labfil[®]

WELDED SYRINGE FILTER



Welded Syringe Filter

φ30mm φ25mm φ13mm

Pore size:0.22μm/0.45μm



- Filtration is achieved by pushing the sample through the membrane with a syringe or other luer-connection device.
- Syringe Filters allow you to control the rate off low, which can be critical with delicate samples. It also allows you to filter into nearly any tube, vial, or column that represents the next step in your analysis.

Syringe Filter Selection Guide

- Syringe filters are used for many routine preparation steps in laboratories all over the world.
- They are convenient, ready-to use disposables for removal of particles from solutions and gases.
- LABFIL syringe filters are for a wide range of applications.
- The filters are clean and safe as they are virtually free of leachables and extractables and reliably remove particles and microorganisms without any leakage.

Syringe Filter Capacities	Sample Volume
13mm Syringe Filter	less or equal 10mL
25mm Syringe Filter	less or equal 100mL
30mm Syringe Filter	less or equal 150mL


Pre-Cut Membrane Capacities	Sample Volume
13mm Pre-Cut Membranes	up to 20mL
25mm Pre-Cut Membranes	up to 100mL
47mm Pre-Cut Membranes	multi-liter

Membrane Selection Guide

- Choosing a membrane filter is based on the size and amount of particulate in the sample, the membrane's chemical compatibility with the sample matrix, and potential interactions (binding) between the membranes and the sample components. This table offers general guidelines on membrane characteristics and applications.

Membrane Selection Guide

Membrane Type	Features	Common Uses
Nylon	Good chemical compatibility and very low extractables	General filtrationsterilization, HPLC sample prep
Polytetrafluoroethylene (PTFE)	Compatible with strong acids and aggressive solvents	Gas, Air, and Solvent filtration
Polyvinylidene Fluoride (PVDF)	Good flow rate characteristics. Ideal for chromatography applications.	HPLC sample preparation and General filtration

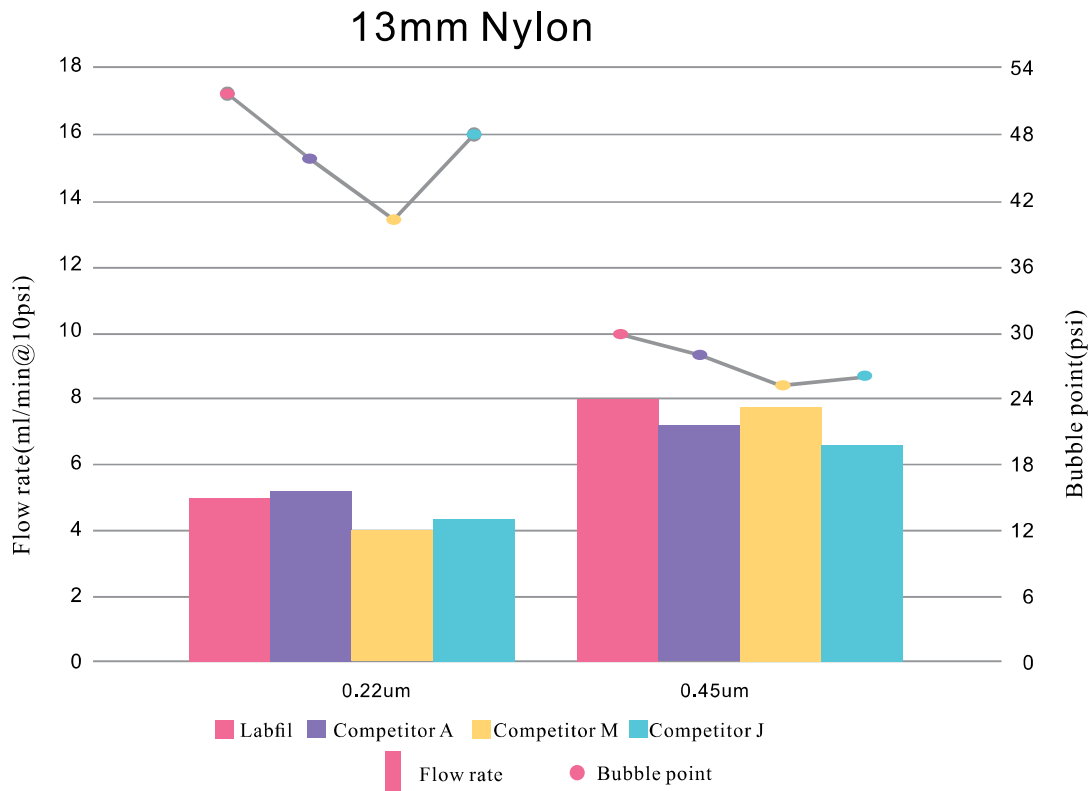

Nylon

- High mechanical and tensile strength.
- Used for most organic solvents and mid-polar liquids.
- Two types in pore size: 0.22 μ m and 0.45 μ m.
- Three types in filter size: 13mm, 25mm and 30mm.



Typical data

Material	Nylon	
Material of housing	pp	
Effective filtration area(cm ²)	13mm/1.13cm ²	25mm/4.15cm ²
Pore size(μ m)	0.22/0.45	
Process volume(ml)	<10ml(13mm)	<100ml(25mm)
Maximum Operating Temperature	100°C	
Maximum Operating Pressure(psi)	87psi	



Ref.No.	C0000277	C0000278	C0000279	C0000280
Description	13mm Nylon Welded Syringe Filter 0.22um with Printing.	13mm Nylon Welded Syringe Filter 0.45um with Printing.	25mm Nylon Welded Syringe Filter 0.22um with Printing.	25mm Nylon Welded Syringe Filter 0.45um with Printing.
	100pcs/pk			

Features

- This Nylon+PP pre-filter provides two times greater throughput than standard filter without pre-filtration.
- One of the most commonly used membranes; broad compatibility with aqueous and organic solvents, with stable hydrophilicity, not suitable for highly acidic samples.

Applications

- Used for most organic solvents mixtures and mid-polar liquids.
- Chemical filtration and Beverage filtration.
- Note: Nylon binds protein, do not use when high protein recovery is desired.

PES

- High flow rates(liquids), low protein binding, low concentrations of extractable substances.
- Low-affinity for proteins and extractable with substantially faster flow rates than PVDF; suitable for pre-filtration and filtration of buffers and culture media.
- Two types in pore size:0.22μm and 0.45μm.
- Three types in filter size:13mm, 25mm and 30mm.



Typical data

Material	PES	
Material of housing	pp	
Effective filtration area(cm ²)	13mm/1.13cm ²	25mm/4.15cm ²
Pore size(μm)	0.22/0.45	
Process volume(ml)	<10ml(13mm)	<100ml(25mm)
Maximum Operating Temperature	90°C	
Maximum Operating Pressure(psi)	87psi	



Ref.No.	C0000293	C0000294	C0000295	C0000296
Description	13mm PES Welded Syringe Filter 0.22um with Printing.	13mm PES Welded Syringe Filter 0.45um with Printing.	25mm PES Welded Syringe Filter 0.22um with Printing.	25mm PES Welded Syringe Filter 0.45um with Printing.
100pcs/pk				

Features

- This PES+PP pre-filter provides two times greater throughput than standard filter without pre-filtration.
- Faster flow rate than PVDF.
- Excellent thermal resistance and chemical resistance.

Applications

- PES is certified for ion chromatography; tissue culture media; filtration of proteins and nucleic acids.
- Suitable for filtration of aqueous solution with high throughput.

PTFE Hydrophilic

- For removing particulates, reducing signal-to-noise ratios and maintaining flat baselines.
- Filtering aqueous and organic solutions.
- Two types in pore size: 0.22 μ m and 0.45 μ m.
- Three types in filter size: 13mm, 25mm and 30mm.



Typical data

Material	PTFE Hydrophilic	
Material of housing	pp	
Effective filtration area(cm ²)	13mm/1.13cm ²	25mm/4.15cm ²
Pore size(μ m)	0.22/0.45	
Process volume(ml)	<10ml(13mm)	<100ml(25mm)
Maximum Operating Temperature	130°C	
Maximum Operating Pressure(psi)	87psi	



Ref.No.	C0000281	C0000282	C0000283	C0000284
Description	13mm PTFE Hydrophilic Welded Syringe Filter 0.22 μ m with Printing.	13mm PTFE Hydrophilic Welded Syringe Filter 0.45 μ m with Printing.	25mm PTFE Hydrophilic Welded Syringe Filter 0.22 μ m with Printing.	25mm PTFE Hydrophilic Welded Syringe Filter 0.45 μ m with Printing.
	100pcs/pk			

Features

- This PTFE+PP pre-filter provides two times greater throughput than standard filter without pre-filtration.
- Broad chemical compatibility choose for filtering aqueous and organic solutions low protein binding.

Applications

- Industrial Chromatography.
- Filtration of aqueous solutions as well as organic solvents and chemicals.

PTFE Hydrophobic

- High mechanical and tensile strength.
- Used for most organic solvents and mid-polar liquids.
- Two types in pore size: 0.22µm and 0.45µm.
- Three types in filter size: 13mm, 25mm and 30mm.



Typical data

Material	PTFE Hydrophobic	
Material of housing	pp	
Effective filtration area(cm ²)	13mm/1.13cm ²	25mm/4.15cm ²
Pore size(µm)	0.22/0.45	
Process volume(ml)	<10ml(13mm)	<100ml(25mm)
Maximum Operating Temperature	130°C	
Maximum Operating Pressure(psi)	87psi	



Ref.No.	C0000297	C0000298	C0000299	C0000300
Description	13mm PTFE Hydrophobic Welded Syringe Filter 0.22µm with Printing.	13mm PTFE Hydrophobic Welded Syringe Filter 0.45µm with Printing.	25mm PTFE Hydrophobic Welded Syringe Filter 0.22µm with Printing.	25mm PTFE Hydrophobic Welded Syringe Filter 0.45µm with Printing.
		100pcs/pk		

Features

- This PTFE+PP pre-filter provides two times greater throughput than standard filter without pre-filtration.
- Hydrophobic PTFE membrane has great temperature resistance.
- Suitable for Solvents/Gases/Acids/Bases.

Applications

- Degassing/Clarifying aqueous samples.
- Removal of protein precipitates.
- Strong acid solvent filtration and Alkali solvent filtration.
- Biofuel analysis.

PVDF Hydrophilic

- Low protein-binding for filtration of non-aggressive aqueous and mild organic solutions.
- Low UV absorbing extractables and low nonspecific protein binding.
- Two types in pore size: 0.22µm and 0.45µm.
- Three types in filter size: 13mm, 25mm and 30mm.



Typical data

Material	PVDF Hydrophilic	
Material of housing	PP	
Effective filtration area(cm ²)	13mm/1.13cm ²	25mm/4.15cm ²
Pore size(µm)	0.22/0.45	
Process volume(ml)	<10ml(13mm)	<100ml(25mm)
Maximum Operating Temperature	100°C	
Maximum Operating Pressure(psi)	87psi	



Ref.No.	C0000289	C0000290	C0000291	C0000292
Description	13mm PVDF Hydrophilic Welded Syringe Filter 0.22µm with Printing.	13mm PVDF Hydrophilic Welded Syringe Filter 0.45µm with Printing.	25mm PVDF Hydrophilic Welded Syringe Filter 0.22µm with Printing.	25mm PVDF Hydrophilic Welded Syringe Filter 0.45µm with Printing.
100pcs/pk				

Features

- This PVDF +PP pre-filter provides two times greater throughput than standard filter without pre-filtration.
- Hydrophilic membrane with good solvent resistance.

Applications

- Sterilizing/Clarifying filtration of biological solutions.
- Excellent chemical compatibility, even with aggressive acids and alcohols.
- Filtration of samples where high protein recovery is desired.

PVDF Hydrophobic

- Filtration of water-soluble oligomers and polymers, e.g. protein solutions.
- Filtration of hydrophobic substances in different organic solvents.
- Two types in pore size: 0.22µm and 0.45µm.
- Three types in filter size: 13mm, 25mm and 30mm.



Typical data

Material	PVDF Hydrophobic	
Material of housing	pp	
Effective filtration area(cm ²)	13mm/1.13cm ²	25mm/4.15cm ²
Pore size(µm)	0.22/0.45	
Process volume(ml)	<10ml(13mm)	<100ml(25mm)
Maximum Operating Temperature	100°C	
Maximum Operating Pressure(psi)	87psi	



Ref.No.	C0000285	C0000286	C0000287	C0000288
Description	13mm PVDF Hydrophobic Welded Syringe Filter 0.22µm with Printing.	13mm PVDF Hydrophobic Welded Syringe Filter 0.45µm with Printing.	25mm PVDF Hydrophobic Welded Syringe Filter 0.22µm with Printing.	25mm PVDF Hydrophobic Welded Syringe Filter 0.45µm with Printing.
				100pcs/pk

Features

- This PVDF + PP pre-filter provides two times greater throughput than standard filter without pre-filtration.
- This membrane features stability and hydrophobic interactions which is similar to PTFE.

Applications

- Gas filtration, Vapor filtration, High-temperature filtration.
- Food industry and Medicine filtration.

CA

- CA membranes are use in tissue culture media filtration.
- Ideally suited for general filtration and biological/clinical analyse requiring maximum protein recovery.
- High temperature stability can use with heated liquids.
- Two Types in pore size:0.22 μ m and 0.45 μ m.
- Three types in filter size:13mm, 25mm and 30mm.



Typical data

Material	CA	
Material of housing	pp	
Effective filtration area(cm ²)	13mm/1.13cm ²	25mm/4.15cm ²
Pore size(μ m)	0.22/0.45	
Process volume(ml)	<10ml(13mm)	<100ml(25mm)
Maximum Operating Temperature	50°C	
Maximum Operating Pressure(psi)	87psi	



Ref.No.	C0000760	C0000761	C0000301	C0000302
Description	13mm CA Welded Syringe Filter 0.22um with Printing.	13mm CA Welded Syringe Filter 0.45um with Printing.	25mm CA Welded Syringe Filter 0.22um with Printing.	25mm CA Welded Syringe Filter 0.45um with Printing.
	100pcs/pk			

Features

- This CA+PP pre-filter provides two times greater throughput than standard filter without pre-filtration.
- Naturally hydrophilic membrane filter.
- Low protein binding: great for protein solutions, such as protein isolation pre-filtration.
- Suitable for ground water filtration.
- Uniform pore size structure.

Applications

- Filtration of liquid samples and some organic solvents.
- Cell retention and particle retention.
- Light scattering measurement.
- Sterilization of liquids.

RC

- The best option for reliable and leachable free sterilisation of liquids.
- The very low non-specific binding characteristics of this membrane makes it a perfect choice for biomolecule solutions and other dissolved substances.
- Two types in pore size: 0.22µm and 0.45µm.
- Three types in filter size: 13mm, 25mm and 30mm.



Typical data

Material	RC	
Material of housing	pp	
Effective filtration area(cm ²)	13mm/1.13cm ²	25mm/4.15cm ²
Pore size(µm)	0.22/0.45	
Process volume(ml)	<10ml(13mm)	<100ml(25mm)
Maximum Operating Temperature	100°C	
Maximum Operating Pressure(psi)	87psi	



Ref.No.	C0001179	C0001180	C0001181	C0001182
Description	13mm RC Welded Syringe Filter 0.22um.	13mm RC Welded Syringe Filter 0.45um.	25mm RC Welded Syringe Filter 0.22um.	25mm RC Welded Syringe Filter 0.45um.
100pcs/pk				

Features

- This RC+PP pre-filter provides two times greater throughput than standard filter without pre-filtration.
- Outperforming chemical compatibility choose for biomolecule solutions and other dissolved substances.

Applications

- Industrial Chromatography
- Filtration of aqueous solutions as well as organic solvents and chemicals.



Labfil[®]

ECONOMY SYRINGE FILTER



Economy Syringe Filter

φ33mm φ25mm φ13mm

Pore size:0.22μm/0.45μm



Economy Syringe Filter

- In order to meet different customers' request, LABFIL supply the syringe filters with outer ring as well.
- It's available in many different pore sizes and with several hydrophilic or hydrophobic membrane materials.
- More Economic.
- Reliable removal of microorganisms and particles from liquids for HPLC sample preparation.
- High mechanical and tensile strength.

Type	Color 0.45μm	Color 0.22μm
MCE	Green	Light Green
NY	Yellow	Light Yellow
PES	Green	Light Green
PVDF(Hydrophilic/Hydrophobic)	Purple	Light Purple
PTFE(Hydrophilic/Hydrophobic)	Red	Pink



Nylon

- High mechanical and tensile strength.
- Universal application for analytical procedures.
- Two types in pore size: 0.22µm and 0.45µm.
- Three types in filter size: 13mm, 25mm and 33mm.



Typical data

Material	Nylon	
Material of housing	pp	
Effective filtration area(cm ²)	13mm/1.13cm ²	25mm/4.15cm ²
Pore size(µm)	0.22/0.45	
Process volume(ml)	<10ml(13mm)	<100ml(25mm)
Maximum Operating Temperature	100°C	
Maximum Operating Pressure(psi)	87psi	



Ref.No.	C0000602	C0000603	C0000604	C0000605
Description	13mm Nylon Syringe Filter 0.22µm with Outer Ring.	13mm Nylon Syringe Filter 0.45µm with Outer Ring.	25mm Nylon Syringe Filter 0.22µm with Outer Ring.	25mm Nylon Syringe Filter 0.45µm with Outer Ring.
	100pcs/pk			

Features

- One of the most commonly used membranes.
- Broad compatibility with aqueous and organic solvents, with stable hydrophilicity, not suitable for highly acidic samples.

Applications

- Used for most organic solvents mixtures and mid-polar liquids.
- Chemical filtration and Beverage filtration.
- Note: Nylon binds protein, do not use when high protein recovery is desired.



PES

- High mechanical and tensile strength.
- Used for most organic solvents and mid-polar liquids.
- Two types in pore size: 0.22µm and 0.45µm.
- Three types in filter size: 13mm, 25mm and 33mm.



Typical data

Material	PES	
Material of housing	pp	
Effective filtration area(cm ²)	13mm/1.13cm ²	25mm/4.15cm ²
Pore size(µm)	0.22/0.45	
Process volume(ml)	<10ml(13mm)	<100ml(25mm)
Maximum Operating Temperature	90°C	
Maximum Operating Pressure(psi)	87psi	



Ref.No.	C0000622	C0000623	C0000624	C0000625
Description	13mm PES Syringe Filter 0.22um with Outer Ring.	13mm PES Syringe Filter 0.45um with Outer Ring.	25mm PES Syringe Filter 0.22um with Outer Ring.	25mm PES Syringe Filter 0.45um with Outer Ring.
100pcs/pk				

Features

- Excellent thermal resistance and chemical resistance.
- Having high flow rates thanks to their symmetric structure .
- A low protein adsorption, recommended for filtration of protein filtration as well as aqueous solutions filtration.
- The low level extractables makes them suitable for environmental analysis.

Applications

- PES is certified for ion chromatography; tissue culture media; filtration of proteins and nucleic acids.
- Suitable for filtration of aqueous solution with high throughput.



PTFE Hydrophobic

- ♦ Hydrophobic PTFE syringe filters have broad chemical compatibility and high pH resistance.
- ♦ Versatile filters for use with aggressive organic solvent-based solutions and are especially ideal for HPLC sample preparation.
- ♦ Two types in pore size: 0.22µm and 0.45µm.
- ♦ Three types in filter size: 13mm, 25mm and 33mm .



Typical data

Material	PTFE Hydrophobic	
Material of housing	pp	
Effective filtration area(cm ²)	13mm/1.13cm ²	25mm/4.15cm ²
Pore size(µm)	0.22/0.45	
Process volume(ml)	<10ml(13mm)	<100ml(25mm)
Maximum Operating Temperature	130°C	
Maximum Operating Pressure(psi)	87psi	



Ref.No.	C0000610	C0000611	C0000612	C0000613
Description	13mm PTFE Hydrophobic Syringe Filter 0.22µm with Outer Ring.	13mm PTFE Hydrophobic Syringe Filter 0.45µm with Outer Ring.	25mm PTFE Hydrophobic Syringe Filter 0.22µm with Outer Ring.	25mm PTFE Hydrophobic Syringe Filter 0.45µm with Outer Ring.
	100pcs/pk			

Features

- ♦ Hydrophobic PTFE membrane has great temperature resistance.
- ♦ Suitable for Solvents/Gases/Acids/Bases.
- ♦ Excellent chemical compatibility for filtering harsh chemicals that destroy other membrane materials and ideal for aerosol sampling.



Applications

- ♦ Degassing/Clarifying aqueous samples.
- ♦ Removal of protein precipitates.
- ♦ Strong acid solvent filtration and Alkali solvent filtration.
- ♦ Biofuel analysis.



PTFE Hydrophilic

- Hydrophilic materials are obtained through process improvement.
- Hydrophilic material has a great affinity for water and it's easily wetted by water because of the surface with water molecules to form intermolecular forces.



- High mechanical and tensile strength.
- Used for most organic solvents and mid-polar liquids.
- Two types in pore size: 0.22 μ m and 0.45 μ m.
- Three types in filter size: 13mm, 25mm and 33mm.



Typical data

Material	PTFE Hydrophilic	
Material of housing	pp	
Effective filtration area(cm ²)	13mm/1.13cm ²	25mm/4.15cm ²
Pore size(μ m)	0.22/0.45	
Process volume(ml)	<10ml(13mm)	<100ml(25mm)
Maximum Operating Temperature	130°C	
Maximum Operating Pressure(psi)	87psi	



Ref.No.	C0000606	C0000607	C0000608	C0000609
Description	13mm PTFE Hydrophilic Syringe Filter 0.22 μ m with Outer Ring.	13mm PTFE Hydrophilic Syringe Filter 0.45 μ m with Outer Ring.	25mm PTFE Hydrophilic Syringe Filter 0.22 μ m with Outer Ring.	25mm PTFE Hydrophilic Syringe Filter 0.45 μ m with Outer Ring.
100pcs/pk				

Features

- Broad chemical compatibility choose for filtering aqueous and organic solutions low protein binding.
- Low IC extractables.

Applications

- Industrial Chromatography.
- Filtration of aqueous solutions as well as organic solvents and chemicals.



PVDF Hydrophobic

- Filtration of water-soluble oligomers and polymers, e.g. protein solutions.
- Filtration of hydrophobic substances in different organic solvents.
- Two types in pore size: 0.22µm and 0.45µm.
- Three types in filter size: 13mm, 25mm and 33mm.



Typical data

Material	PVDF Hydrophobic	
Material of housing	pp	
Effective filtration area(cm ²)	13mm/1.13cm ²	25mm/4.15cm ²
Pore size(µm)	0.22/0.45	
Process volume(ml)	<10ml(13mm)	<100ml(25mm)
Maximum Operating Temperature	100°C	
Maximum Operating Pressure(psi)	87psi	



Ref.No.	C0000618	C0000619	C0000620	C0000621
Description	13mm PVDF Hydrophobic Syringe Filter 0.22µm with Outer Ring.	13mm PVDF Hydrophobic Syringe Filter 0.45µm with Outer Ring.	25mm PVDF Hydrophobic Syringe Filter 0.22µm with Outer Ring.	25mm PVDF Hydrophobic Syringe Filter 0.45µm with Outer Ring.
	100pcs/pk			

Features

- This membrane features stability and hydrophobic interactions which is similar to PTFE.
- Naturally hydrophobic membrane provides excellent flow rates and high loading.
- Exceptional temperature stability provides extended sampling range over other membranes.



Applications

- Gas filtration, Vapor filtration, High-temperature filtration.
- Food industry and Medicine filtration.



PVDF Hydrophilic

- Hydrophilic materials are obtained through process improvement.
- Hydrophilic material has a great affinity for water and it's easily wetted by water because of the surface with water mole cules to form intermolecular foces.



- Low protein-binding for filtration of non-aggressive aqueous and mild organic solutions.
- Low UV absorbing extractables and low nonspecific protein binding.
- Two types in pore size: 0.22µm and 0.45µm.
- Three types in filter size: 13mm, 25mm and 33mm.



Typical data

Material	PVDF Hydrophilic	
Material of housing	pp	
Effective filtration area(cm ²)	13mm/1.13cm ²	25mm/4.15cm ²
Pore size(µm)	0.22/0.45	
Process volume(ml)	<10ml(13mm)	<100ml(25mm)
Maximum Operating Temperature	100°C	
Maximum Operating Pressure(psi)	87psi	



Ref.No.	C0000614	C0000615	C0000616	C0000617
Description	13mm PVDF Hydrophilic Syringe Filter 0.22um with Outer Ring.	13mm PVDF Hydrophilic Syringe Filter 0.45um with Outer Ring.	25mm PVDF Hydrophilic Syringe Filter 0.22um with Outer Ring.	25mm PVDF Hydrophilic Syringe Filter 0.45um with Outer Ring.
100pcs/pk				

Features

- Hydrophilic membrane with good solvent resistance.
- It has superior performance to prevent leak of sample solvent and can promise membrane area being used in a large filtration area.

Applications

- Sterilizing/Clarifying filtration of biological solutions.
- Excellent chemical compatibility, even with aggressive acids and alcohols.
- Filtration of samples where high protein recovery is desired.

MCE

- Biologically inert mixtures of cellulose acetate and cellulose nitrate.
- Membranes in analytical and research applications.
- Two types in pore size: 0.22µm and 0.45µm.
- Three types in filter size: 13mm, 25mm, 33mm.



Typical data

Material	MCE	
Material of housing	PP	
Effective filtration area(cm ²)	13mm/1.13cm ²	25mm/4.15cm ²
Pore size(µm)	0.22/0.45	
Process volume(ml)	<10ml(13mm)	<100ml(25mm)
Maximum Operating Temperature	50°C	
Maximum Operating Pressure(psi)	87psi	



Ref.No.	C0001239	C0001240	C0001241	C0001242
Description	13mm MCE Syringe Filter 0.22µm with Outer Ring and Printing.	13mm MCE Syringe Filter 0.45µm with Outer Ring and Printing.	25mm MCE Syringe Filter 0.22µm with Outer Ring and Printing.	25mm MCE Syringe Filter 0.45µm with Outer Ring and Printing.
	100pcs/pk			

Features

- Ideal for capturing and culturing microorganisms in the Water and wastewater industry.
- Used to determine particulate contamination of lubricating oil and hydraulic fluid in patch test kits.
- Compatible with gamma irradiation.

Applications

- Appropriate for bacterial culturing, including E. coli culturing
- Biologically inert with good thermal stability
- Uniform microporous structure results in high flow rates when used for filtering



Labfil[®]
STERILE SYRINGE FILTER



Sterile Syringe Filter

Nylon

- 100% integrity tested.
- Individually packaged.
- Ideal for sterile filtration.
- Low extractables, high protein binding; recommended for alcohols and weak solvents.



Ref.No.	C0000524	C0000525	C0000526	C0000527
Description	Sterile 13mm Nylon Syringe Filter 0.22um with Outer Ring.	Sterile 13mm Nylon Syringe Filter 0.45um with Outer Ring.	Sterile 25mm Nylon Syringe Filter 0.22um with Outer Ring.	Sterile 25mm Nylon Syringe Filter 0.45um with Outer Ring.
	100pcs/pk		50pcs/pk	

PTFE

- 100% integrity tested.
- Individually packaged.
- Ideal for sterile filtration.
- For degassing/clarifying aqueous and solvent samples.

PTFE Hydrophilic



Ref.No.	C0000528	C0000529	C0000530	C0000531
Description	Sterile 13mm PTFE Hydrophilic Syringe Filter 0.22um with Outer Ring.	Sterile 13mm PTFE Hydrophilic Syringe Filter 0.45um with Outer Ring.	Sterile 25mm PTFE Hydrophilic Syringe Filter 0.22um with Outer Ring.	Sterile 25mm PTFE Hydrophilic Syringe Filter 0.45um with Outer Ring.
	100pcs/pk		50pcs/pk	

PTFE Hydrophobic



Ref.No.	C0000532	C0000533	C0000534	C0000535
Description	Sterile 13mm PTFE Hydrophobic Syringe Filter 0.22um with Outer Ring.	Sterile 13mm PTFE Hydrophobic Syringe Filter 0.45um with Outer Ring.	Sterile 25mm PTFE Hydrophobic Syringe Filter 0.22um with Outer Ring.	Sterile 25mm PTFE Hydrophobic Syringe Filter 0.45um with Outer Ring.
	100pcs/pk		50pcs/pk	

PES

- 100% integrity tested.
- Individually packaged.
- Ideal for sterile filtration.
- For medical use, sterile filtering protein solution, tissue culture media, additives.



Ref.No.	C0000544	C0000545	C0000546	C0000547
Description	Sterile 13mm PES Syringe Filter 0,22um with Outer Ring.	Sterile 13mm PES Syringe Filter 0,45um with Outer Ring.	Sterile 25mm PES Syringe Filter 0,22um with Outer Ring.	Sterile 25mm PES Syringe Filter 0,45um with Outer Ring.
	100pcs/pk		50pcs/pk	

PVDF

- 100% integrity tested.
- Individually packaged.
- For sterilization/clarification of water, buffers, and salt solutions.

PVDF Hydrophilic



Ref.No.	C0000536	C0000537	C0000538	C0000539
Description	Sterile 13mm PVDF Hydrophilic Syringe Filter 0,22um with Outer Ring.	Sterile 13mm PVDF Hydrophilic Syringe Filter 0,45um with Outer Ring.	Sterile 25mm PVDF Hydrophilic Syringe Filter 0,22um with Outer Ring.	Sterile 25mm PVDF Hydrophilic Syringe Filter 0,45um with Outer Ring.
	100pcs/pk		50pcs/pk	

PVDF Hydrophobic



Ref.No.	C0000540	C0000541	C0000542	C0000543
Description	Sterile 13mm PVDF Hydrophobic Syringe Filter 0,22um with Outer Ring.	Sterile 13mm PVDF Hydrophobic Syringe Filter 0,45um with Outer Ring.	Sterile 25mm PVDF Hydrophobic Syringe Filter 0,22um with Outer Ring.	Sterile 25mm PVDF Hydrophobic Syringe Filter 0,45um with Outer Ring.
	100pcs/pk		50pcs/pk	



Labfil[®]

MEMBRANE FILTER

47MM Sterile MCE Grid Membrane Filter

- Biologically inert mixtures of cellulose acetate and cellulose nitrate have made sterile MCE membrane filters one of the most widely used membranes in analytical and research applications.



Ref.No.	C0001244	C0001243
Description	47mm Sterile MCE Grid Membrane White Membrane/Black 0.22um.	47mm Sterile MCE Grid Membrane White Membrane/Black 0.45um. 100pcs/pk

Features

- Ideal for capturing and culturing microorganisms in the Water and wastewater industry.
- Used to determine particulate contamination of lubricating oil and hydraulic fluid in patch test kits.
- Available in pore sizes 0.22um and 0.45um, colored black, with a gridded surface.
- Compatible with gamma irradiation.

Membrane Filter

- Membrane filters or "membranes" are polymer films with specific pore ratings.
- Membranes retain particles and microorganisms that exceed their pore ratings by acting as a physical barrier and capturing such particles on the surface of the membrane.
- Labfil membranes are available in a variety of polymers, pore sizes, diameters, and surface types.



Membrane Filter

- Membrane filters or "membranes" are polymer films with specific pore ratings.
- Membranes retain particles and microorganisms that exceed their pore ratings by acting as a physical barrier and capturing such particles on the surface of the membrane.
- Labfil membranes are available in a variety of polymers, pore sizes, diameters, and surface types.

Image	Type	Dimension(mm)	Pore Size	Item No.	Packing
	CA	47mm	0.22µm	C0000875	100pcs/pk
			0.45µm	C0000876	
		90mm	0.22µm	C0000877	100pcs/pk
			0.45µm	C0000878	
	MCE	47mm	0.22µm	C0000311	100pcs/pk
			0.45µm	C0000313	
		90mm	0.22µm	☒	100pcs/pk
			0.45µm	☒	
	Nylon	47mm	0.22µm	C0000303	100pcs/pk
			0.45µm	C0000305	
		90mm	0.22µm	C0000304	100pcs/pk
			0.45µm	C0000306	
	PES	47mm	0.22µm	C0000891	100pcs/pk
			0.45µm	C0000892	
		90mm	0.22µm	C0000893	100pcs/pk
			0.45µm	C0000894	
	PVDF(Hydrophilic)	47mm	0.22µm	C0000909	100pcs/pk
			0.45µm	C0000563	
		90mm	0.22µm	C0000910	100pcs/pk
			0.45µm	C0000911	
	PVDF(Hydrophobic)	47mm	0.22µm	C0000916	100pcs/pk
			0.45µm	C0000917	
		90mm	0.22µm	C0000918	100pcs/pk
			0.45µm	C0000919	
	PTFE(Hydrophilic)	47mm	0.22µm	C0000424	100pcs/pk
			0.45µm	C0000425	
		90mm	0.22µm	C0000899	100pcs/pk
			0.45µm	C0000900	
	PTFE(Hydrophobic)	47mm	0.22µm	C0000307	100pcs/pk
			0.45µm	C0000309	
		90mm	0.22µm	C0000308	100pcs/pk
			0.45µm	C0000310	

Chemical Compatibility


C=Compatibility		LC=Limited Compatibility		IC=Incompatibility		ND=No Data at present	
Chemical		Nylon	PTFE	PVDF	PES		
ACIDS	acetic acid 25%	C	C	C	C		
	hydrochloric acid 25%	IC	C	C	C		
	Sulfuric acid,25%	IC	C	C	C		
	Nitric acid,25%	IC	C	C	C		
	Phosphoric acid,25%	IC	C	ND	ND		
	Formic acid,25%	IC	C	ND	ND		
	trichloroacetic acid,10%	IC	C	ND	ND		
Alcohol	Methyl alcohol,98%	C	C	C	C		
	ethyl alcohol,70%	LC	C	C	C		
	Isopropyl alcohol	C	C	C	C		
	Butanol	C	C	C	C		
	benzyl alcohol	C	C	C	ND		
	glycerinum	C	C	C	C		
Acid amides	Triethanolamine	C	C	ND	ND		
	Aniline	ND	C	ND	ND		
	Pyridine	C	C	IC	IC		
	Acetonitrile	C	C	C	LC		
Lipid	Ethyl acetate	C	C	C	IC		
	N-butyl acetate	C	C	IC	IC		
	Propyl acetate	C	C	IC	IC		
	Cellosolve acetate	ND	C	ND	IC		
	Methyl Cellosolve	ND	C	ND	IC		
	Isopropyl myristate	C	C	ND	IC		
Ketone	Acetone	C	C	IC	IC		
	Cyclohexanone	C	C	IC	IC		
	Methyl ethyl ketone	C	C	LC	IC		
	Methyl-Isobutyl Ketone	ND	C	LC	IC		
Organic Peroxide	Dioxane	C	C	LC	IC		
	Tetrahydrofuran	C	C	LC	IC		
	Dimethyl sulfoxide	C	C	IC	IC		
	Isopropyl ether	ND	C	C	C		
Sundry	Phenol solution,10%	ND	C	LC	IC		
	Formaldehyde Solution,30%	C	C	C	C		
	Hydrogen Peroxide	C	C	ND	ND		
	Silicone oil/silicone oil	ND	C	C	C		

Be Simple, Be Professional

Chromatography Vials, Septa & Caps




Syringe Filter

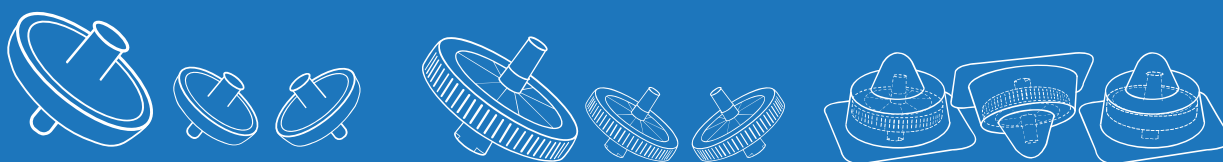



**YOUR RELIABLE SUPPLIER OF
CHROMATOGRAPHY
VIALS, SEPTA & CAPS
SYRINGE FILTERS**

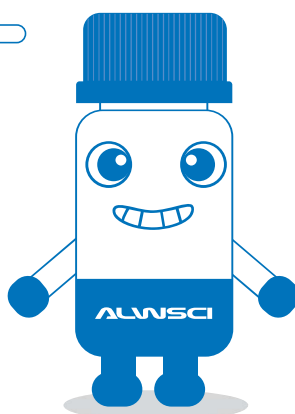

000 «Диаэм»

Москва
ул. Магаданская, д. 7, к. 3 ■ тел./факс: (495) 745-0508 ■ sales@dia-m.ru

www.dia-m.ru

С.-Петербург
+7 (812) 372-6040
spb@dia-m.ru

Новосибирск
+7(383) 328-0048
nsk@dia-m.ru

Воронеж
+7 (473) 232-4412
vrn@dia-m.ru

Йошкар-Ола
+7 (927) 880-3676
nba@dia-m.ru

Красноярск
+7(923) 303-0152
krsk@dia-m.ru

Казань
+7(843) 210-2080
kazan@dia-m.ru

Ростов-на-Дону
+7 (863) 303-5500
rnd@dia-m.ru

Екатеринбург
+7 (912) 658-7606
ekb@dia-m.ru

Кемерово
+7 (923) 158-6753
kemerovo@dia-m.ru

Армения
+7 (094) 01-0173
armenia@dia-m.ru

